


SITE PLAN PREPARED FOR:
JUNE HERMAN
TEAR-DOWN ACCESSORY STRUCTURE

3588 CO RD 16
TOWN OF CANANDAIGUA
COUNTY OF ONTARIO
STATE OF NEW YORK

OCTOBER 6, 2021

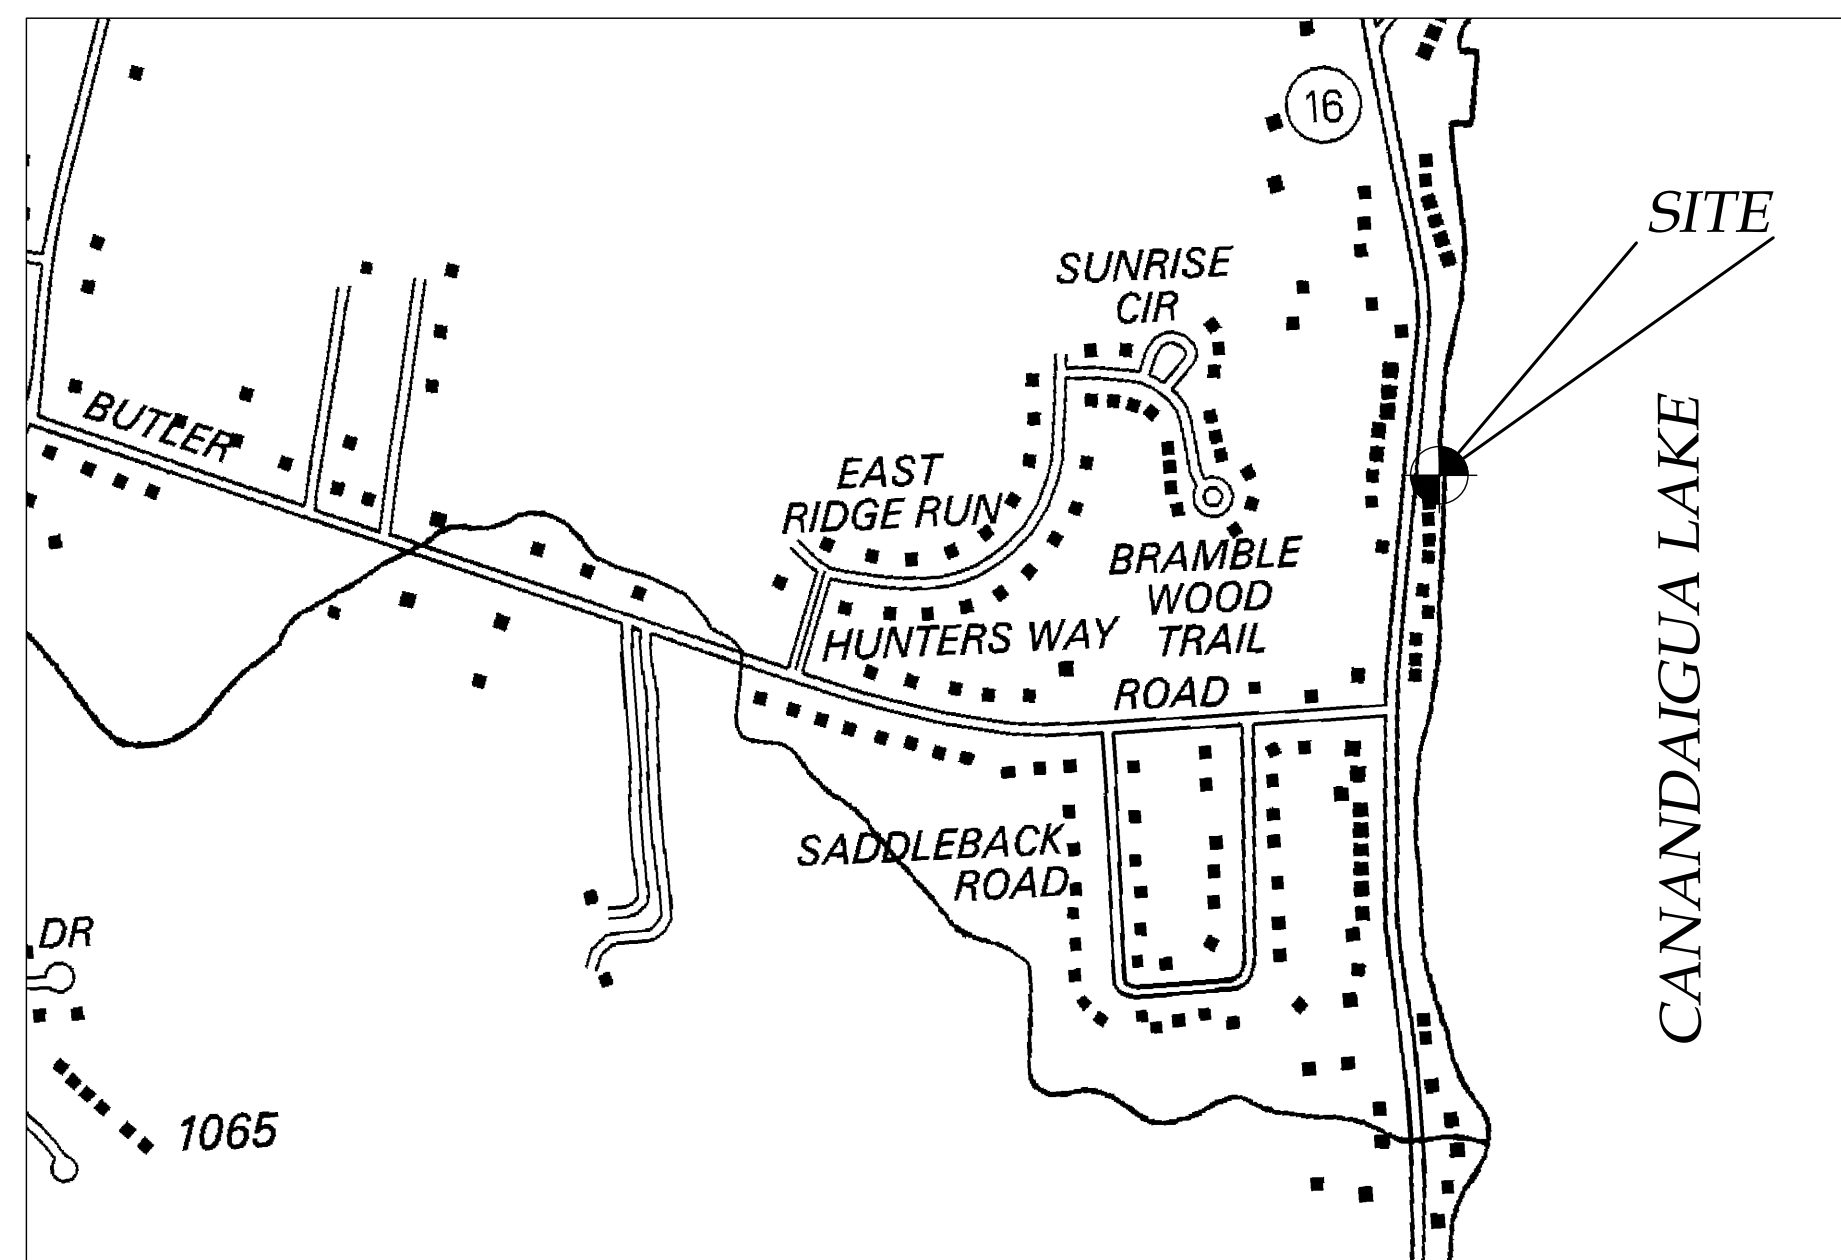


LOCATION MAP
NTS



AERIAL MAP — FOR REFERENCE ONLY
NTS

INDEX-
COVER
EX100- EXISTING CONDITIONS/DEMOLITION PLAN
C100 - SITE PLAN
C500- GENERAL DETAILS

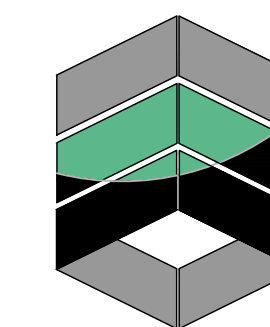

MarksEngineering

MARKS ENGINEERING, P.C.
42 BEEMAN STREET
CANANDAIGUA, NY 14424
(585)905-0360
WWW.MARKSENGINEERING.COM

PROPERTY OWNER:
JUNE G. AND ROGER M. HERMAN
3588 CO RD 16
CANANDAIGUA, NEW YORK 14424

PREPARED FOR:
JUNE HERMAN

REVISIONS:

1 10/22/21 TOWN OF CANANDAIGUA JPS



JUNE HERMAN
3588 CO RD 16
TOWN OF CANANDAIGUA
COUNTY OF ONTARIO
NEW YORK
JOB #21-143
10/06/21

ZONING:
RESIDENTIAL LAKESHORE DISTRICT

MAXIMUM PRINCIPAL BUILDING HEIGHT – 25 FEET
MAXIMUM BUILDING COVERAGE – 20%
MAXIMUM LOT COVERAGE – 30%
SETBACKS PRINCIPAL STRUCTURE:
FRONT – 55 FEET
REAR – 30 FEET
SIDE – 10 FEET

MAP REFERENCE

1. SURVEY MAP OF 3852 COUNTY ROAD 16 BY FREELAND–PARRINELLO LAND SURVEYORS, DATED JULY 26, 2013, JOB NO. 94–208RB
2. HORIZONTAL DATUM: NAD83 NEW YORK CENTRAL
3. VERTICAL DATUM NAVD29
3. DEEDS L.938 P.757, L.927 P.986
4. THIS PLAN IS SUBJECT TO ANY EASEMENTS OR ENCUMBRANCES THAT AND UPDATED SEARCH OF TITLE MAY REVEAL.

Iron pin or pipe found

Benchmark

Utility pole

Hydrant

Light pole

PERC TEST

DEEP HOLE

LEGEND

EXISTING

PROPOSED

Utility Lines

R.O.W. line

Property line

Easement line

Centerline

Drainage


Fence Line

Contour Line

ABBREVIATIONS:
EX–EXISTING
CPP–CORRUGATED POLYETHYLENE
PIPE
O.C.–ON CENTER
SICPP–SMOOTH INTERIOR
CORRUGATED POLYETHYLENE PIPE
UG–UNDERGROUND
CONC–CONCRETE

CO –CLEAN OUT
TYP–TYPICAL
R–RADIUS
BC–BOTTOM OF CURB
TC–TOP OF CURB
TW–TOP OF WALL
BW–BOTTOM OF WALL
BS–BOTTOM OF STAIRS

PERF–PERFORATED
MIN–MINIMUM
MAX–MAXIMUM
INV–INVERT
CB–CATCH BASIN
MH–MANHOLE
DI–DRAINAGE INLET

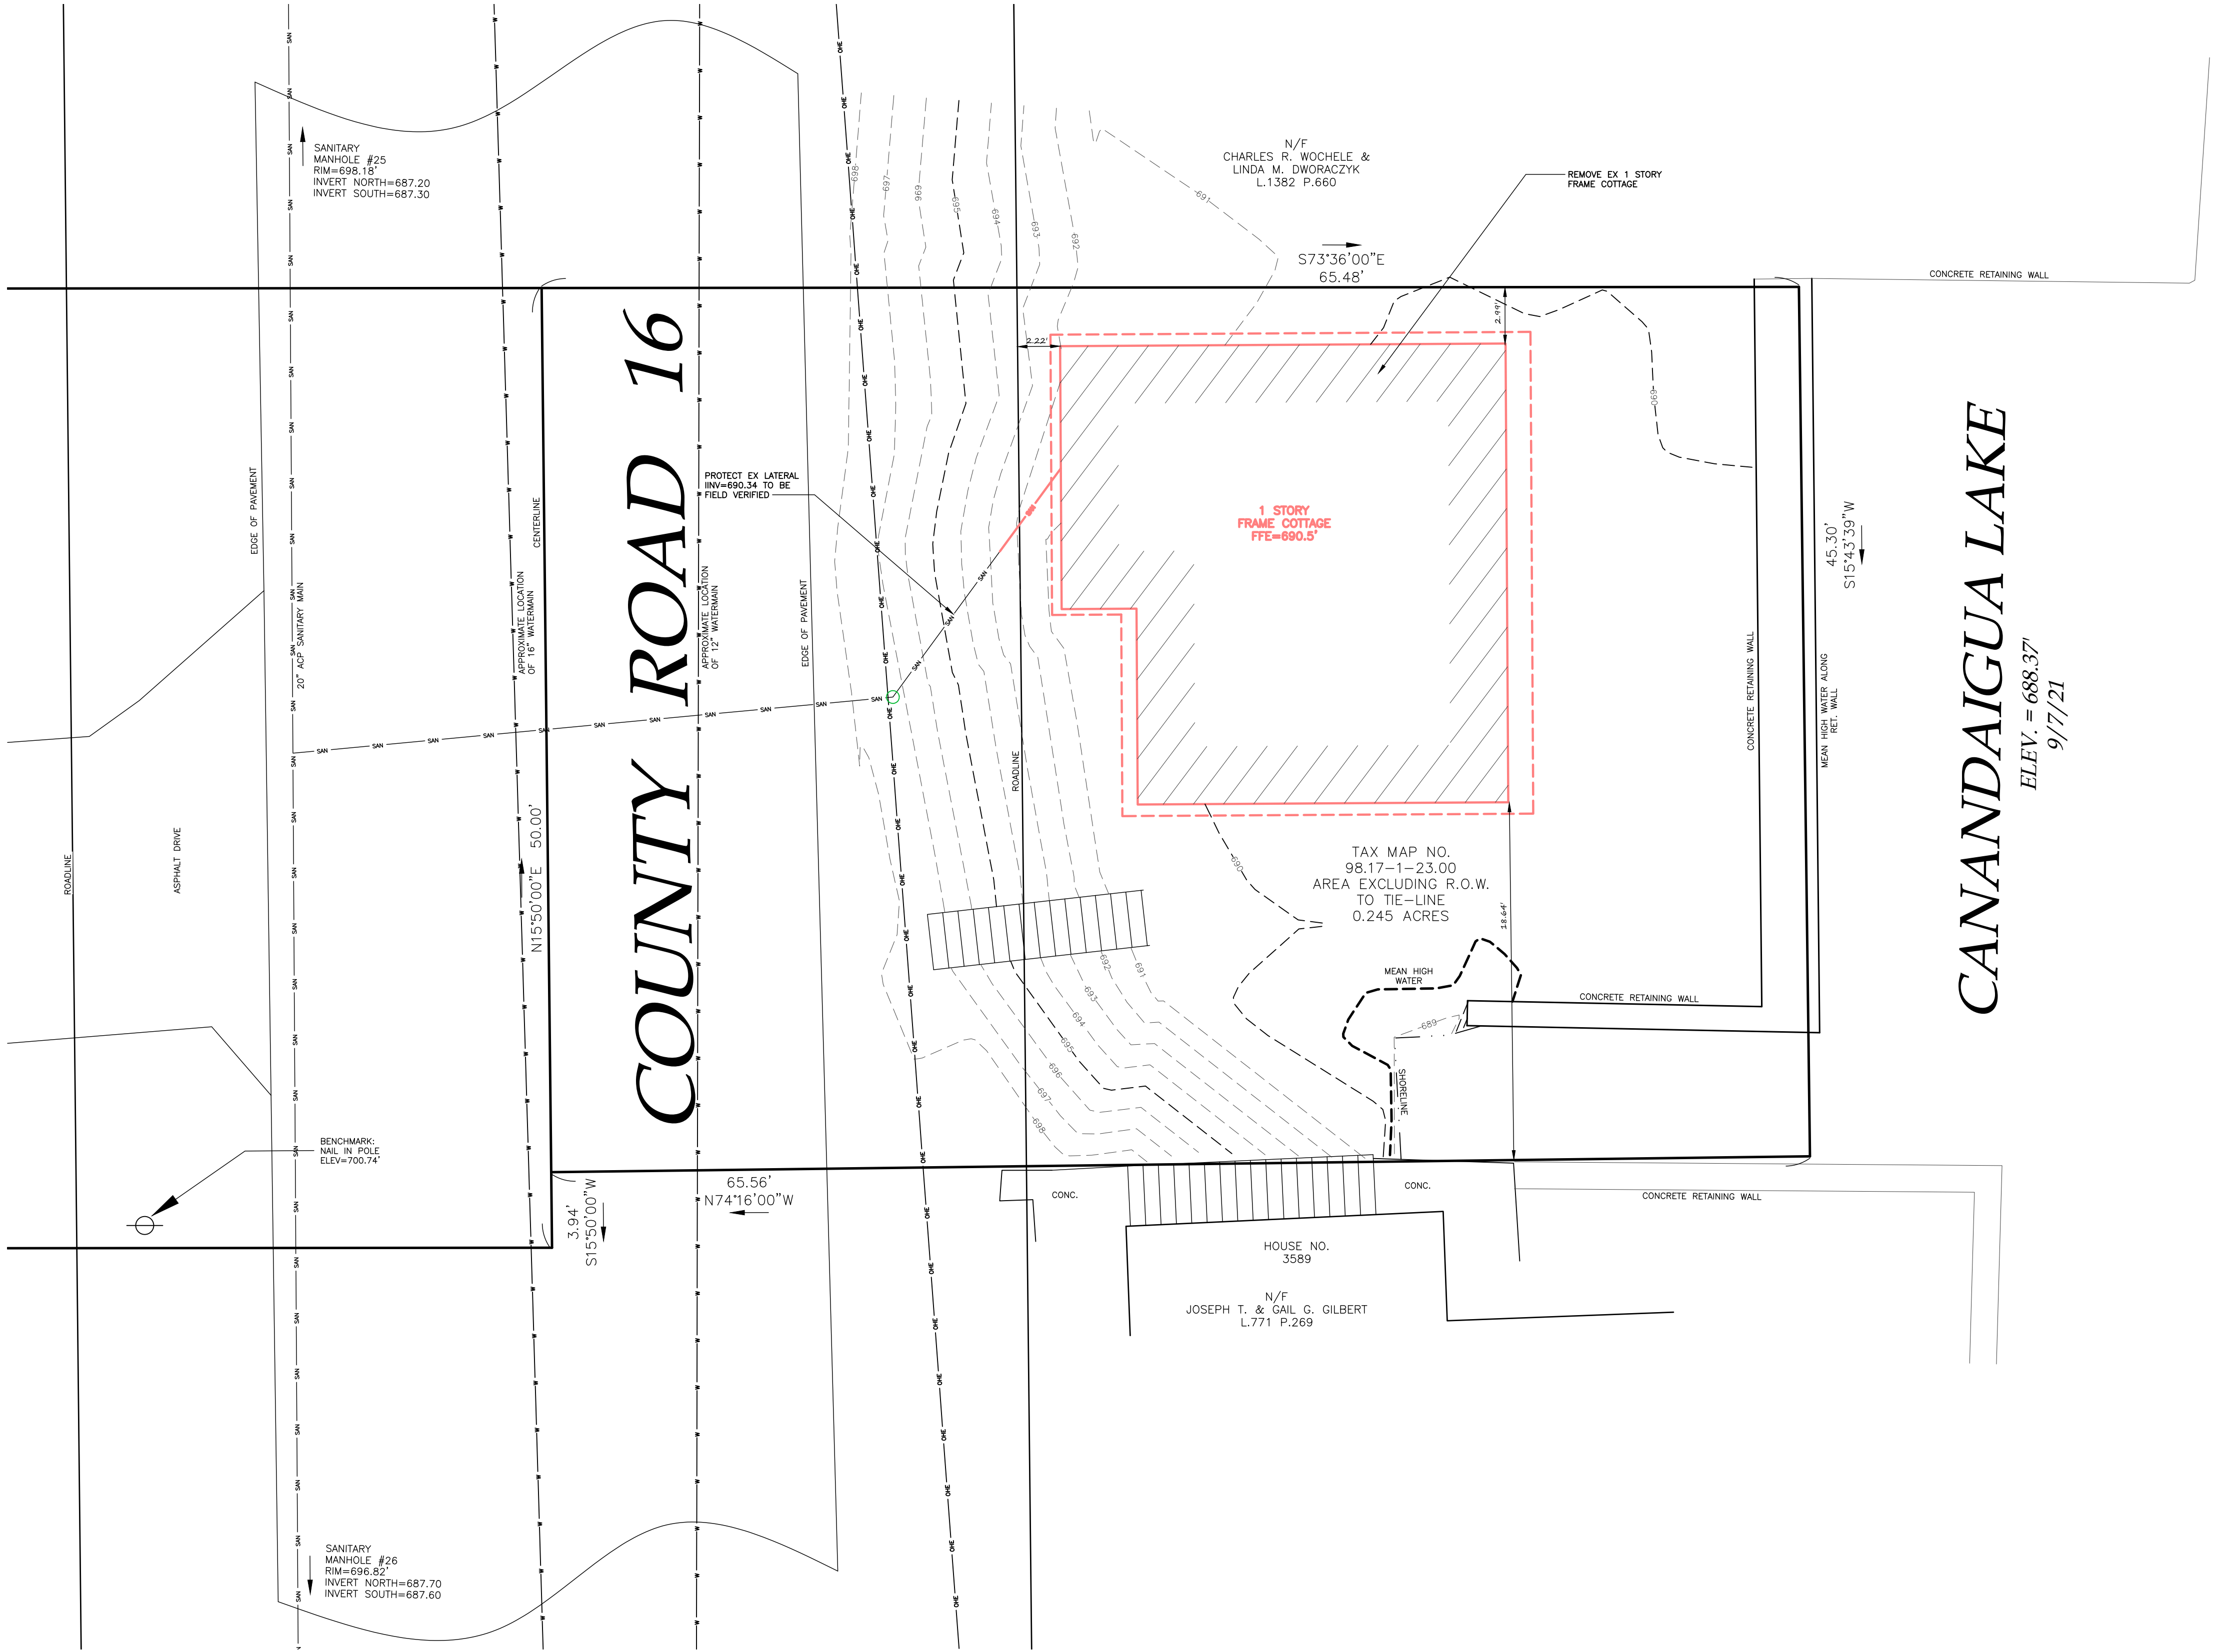

1 EXISTING CONDITIONS
1"=5'

STAMP

STAMP

REVISIONS AND APPROVALS		
NO	DATE	DESCRIPTION OF REVISION OR APPROVAL
1	10/23/21	TOWN OF CANANDAIGUA

PLAN OF LAND OF

JUNE G. & ROGER M. HERMAN

SHOWING LAND IN:

3588 COUNTY ROAD 16

TOWN OF CANANDAIGUA

COUNTY OF ONTARIO

STATE OF NEW YORK

DRAWING TITLE: EXISTING CONDITIONS	
DRAWN BY:	KRB
DESIGNED BY:	
CHECKED BY:	DMP
SCALE:	1"=5'
JOB NO.:	21-143
DATE:	10/06/2021
TAX MAP#:	98.17-1-23.0

CONSTRUCTION SEQUENCE:

- 1) INSTALL SILT FENCE, STABILIZED CONSTRUCTION ENTRANCE AND OTHER TEMPORARY CONTROLS.
- 2) STRIP AND STOCKPILE TOPSOIL
- 3) EXCAVATE FOUNDATION AND ROUGH GRADE SITE.
- 4) BUILD FOUNDATION AND STRUCTURES
- 5) INSTALL UTILITIES
- 6) BACKFILL FOUNDATION
- 7) RESPREAD TOPSOIL AROUND HOUSE, FINAL GRADE SEED AND MULCH
- 8) REMOVE TEMPORARY CONTROLS AFTER SITE STABILIZED WITH VEGETATION
- 9) MAINTAIN SANITARY SEWER SERVICE THROUGH CONSTRUCTION

GENERAL NOTES:

1. THE CONTRACTOR SHALL MAINTAIN ALL UTILITIES AND PROPERTY MARKERS. IT IS THE NYS LAW TO CALL NYS DIG SAFE FOR UFPO (811) PRIOR TO ANY EXCAVATION.
2. THE ROADWAY SHALL BE KEPT FREE OF DEBRIS DURING CONSTRUCTION.
3. THE CONTRACTOR IS RESPONSIBLE FOR SAFETY CONTROL DEVICES. SUCH DEVICES (BARRICADES, FENCING, ETC.) SHALL BE IMPLEMENTED TO MINIMIZE RISK OF INJURY TO PEDESTRIANS AND WORKERS. CONSTRUCTION ACTIVITY SHALL BE CONDUCTED WITHIN COMPLIANCE WITH OSHA GUIDELINES.
4. PLANS ARE GRAPHIC REPRESENTATIONS OF WORK TO BE PERFORMED. THESE PLANS ARE TO INTENDED TO CONVEY ENGINEERING INFORMATION ONLY.
5. CONTRACTOR TO VERIFY ALL LOCATIONS, GRADES AND INVERTS AND NOTIFY ENGINEER OF ANY DISCREPANCIES PRIOR TO THE START OF WORK.
6. ALL SPECIFIED MATERIALS ARE TO BE INSTALLED AS PER MANUFACTURES RECOMMENDATIONS OR INDUSTRY STANDARD.
7. ANY SYSTEM MODIFICATIONS OR DEVIATIONS FROM THE APPROVED PLANS, NYS BUILDING CODES, AND/OR LOCAL REGULATIONS REQUIRED BY SITE CONSTRAINTS, UNFORESEEN CONDITIONS OR GOVERNING AUTHORITIES WILL BE DONE AT THE RISK OF THE CLIENT.

EROSION AND SEDIMENT CONTROL NOTES:

1. THE CONTRACTOR IS RESPONSIBLE FOR THE CONTROL OF EROSION AND SEDIMENTATION DURING CONSTRUCTION. SILT FENCE SHALL BE INSTALLED AND MAINTAINED AS NEEDED.
2. SOIL DISTURBANCES SHALL BE STABILIZED IMMEDIATELY. DISTURBED SOIL THAT WILL REMAIN LONGER THAN 14 DAYS SHALL BE TEMPORARILY STABILIZED WITHIN 7 DAYS. SOIL SHALL BE STABILIZED WITH NORTHERN GRASS SEED MIXTURE OR APPROPRIATE SEED MIXTURE FOR CONDITIONS. GRASS SEED SHALL BE INSTALLED PER MANUFACTURES SPECIFICATIONS. MULCH STRAW APPLIED AT A RATE OF 2 BALES / 1000 SQFT OR SEED MIXTURE TO PROTECT SITE UNTIL SEED GERMINATES. HYDRO-SEED MAY BE INSTALLED AS AN ALTERNATE.
3. CONTRACTOR SHALL INSPECT THE SITE DAILY FOR SIGNS OF EROSION. IF ANY EROSION OR SEDIMENTATION OCCUR CONTRACTOR SHALL IMMEDIATELY PROVIDE PROPER CONTROLS TO STABILIZE THE SITE. ENGINEER WILL RECOMMEND CONTROLS IF REQUIRED.
4. SLOPE GREATER THAN 4 ON 1 SHALL BE STABILIZED WITH JUTE FABRIC INSTALLED AS PER MANUFACTURES SPECIFICATIONS AS REQUIRED.
5. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE IN STALLED IN ACCORDANCE WITH NYS STANDARDS AND SPECIFICATIONS FOR EROSION AND SEDIMENTATION CONTROLS.
6. INSTALL AND MAINTAIN TEMPORARY DIVERSION SWALES AS NEEDED TO CONTROL RUNOFF DURING CONSTRUCTION.
7. THE SITE SHALL BE COMPLETELY STABILIZED FOLLOWING CONSTRUCTION ACTIVITIES AND ALL TEMPORARY PROPERLY CONTROL DEVICES SHALL BE REMOVED AND DISPOSED OF PROPERLY.
8. CONCRETE TRUCK SHALL BE WASHED OUT INTO A SEALED CONTAINER OR DIKED AREA TO PREVENT CONTAMINANTS FROM DISCHARGING TO SURFACE WATERS.

SITE NOTES:

1. THE CONSTRUCTION SITE IS NOT WITHIN 100' OF A WETLAND AS DELINEATED BY NYS DEC. THERE ARE NOT NYS DEC DELINEATED OR APPARENT WETLANDS ON THE PROPERTY AS SHOWN.
2. THE CONSTRUCTION SITE IS WITHIN A 100 YEAR FLOODPLAIN AS DELINEATED BY FEMA.
3. WATER SUPPLY: PUBLIC WATER
4. NYS SPDES PERMIT IS NOT REQUIRED FOR THESE CONSTRUCTION ACTIVITIES, DISTURBANCE SHALL BE LESS THAN ONE ACRE. IF THE CONTRACTOR OR OWNER AT ANY TIME PLAN DISTURB GREATER THAN AN ACRE THE ENGINEER SHALL BE NOTIFIED.
5. ALL NEW OUTDOOR LIGHTING ON SHALL HAVE APPROPRIATE SHIELDS AND CUT-OFF TO LIMIT ILLUMINATION OF OTHER PROPERTIES. ALL LIGHTS SHALL BE DARK SKY COMPLIANT.

GRADING NOTES:


1. CUT AND FILL SLOPES SHALL NOT EXCEED 3 ON 1 UNLESS OTHERWISE NOTED.
2. CONSTRUCTION SHALL CONFORM TO THE TOWN OF CANANDAIGUA AND NYS CODES AND STANDARDS
3. SITE SHALL BE GRADED SUCH THAT THERE IS POSITIVE DRAINAGE AT A MINIMUM OF 2% AWAY FROM ANY BUILDINGS, STRUCTURES, DRIVEWAYS, AND SEPTIC SYSTEM.
4. TOPSOIL SHALL BE STRIPED OF AREAS PLANNED FOR CONSTRUCTION AND REAPPLIED AFTER GRADING IS FINISHED. ANY UNUSED TOPSOIL SHALL BE HAULED OFF SITE.

UTILITY NOTES:

- 1) CONTRACTOR SHALL VERIFY LOCATION OF EXISTING SERVICE AND COORDINATE ALL WORK W/ UTILITY PROVIDERS. RELOCATE WATER AND SANITARY PIPING AS REQUIRED.
- 2) ELEC. SERVICE AND COMMUNICATION SHALL MEET CURRENT NATIONAL ELECTRIC CODE.
- 3) SAFTEY BACKFILL ALL UTILITIES WITH CLEAN EXCAVATED SOIL. ENCASE IN 12" OF SAND IN SOIL CONTAINING STONES OR BEDROCK

AGRICULTURAL NOTE:

THIS PROPERTY IS NOT LOCATED WITHIN AN ESTABLISHED AGRICULTURAL DISTRICT CONTAINING A FARM OPERATION.

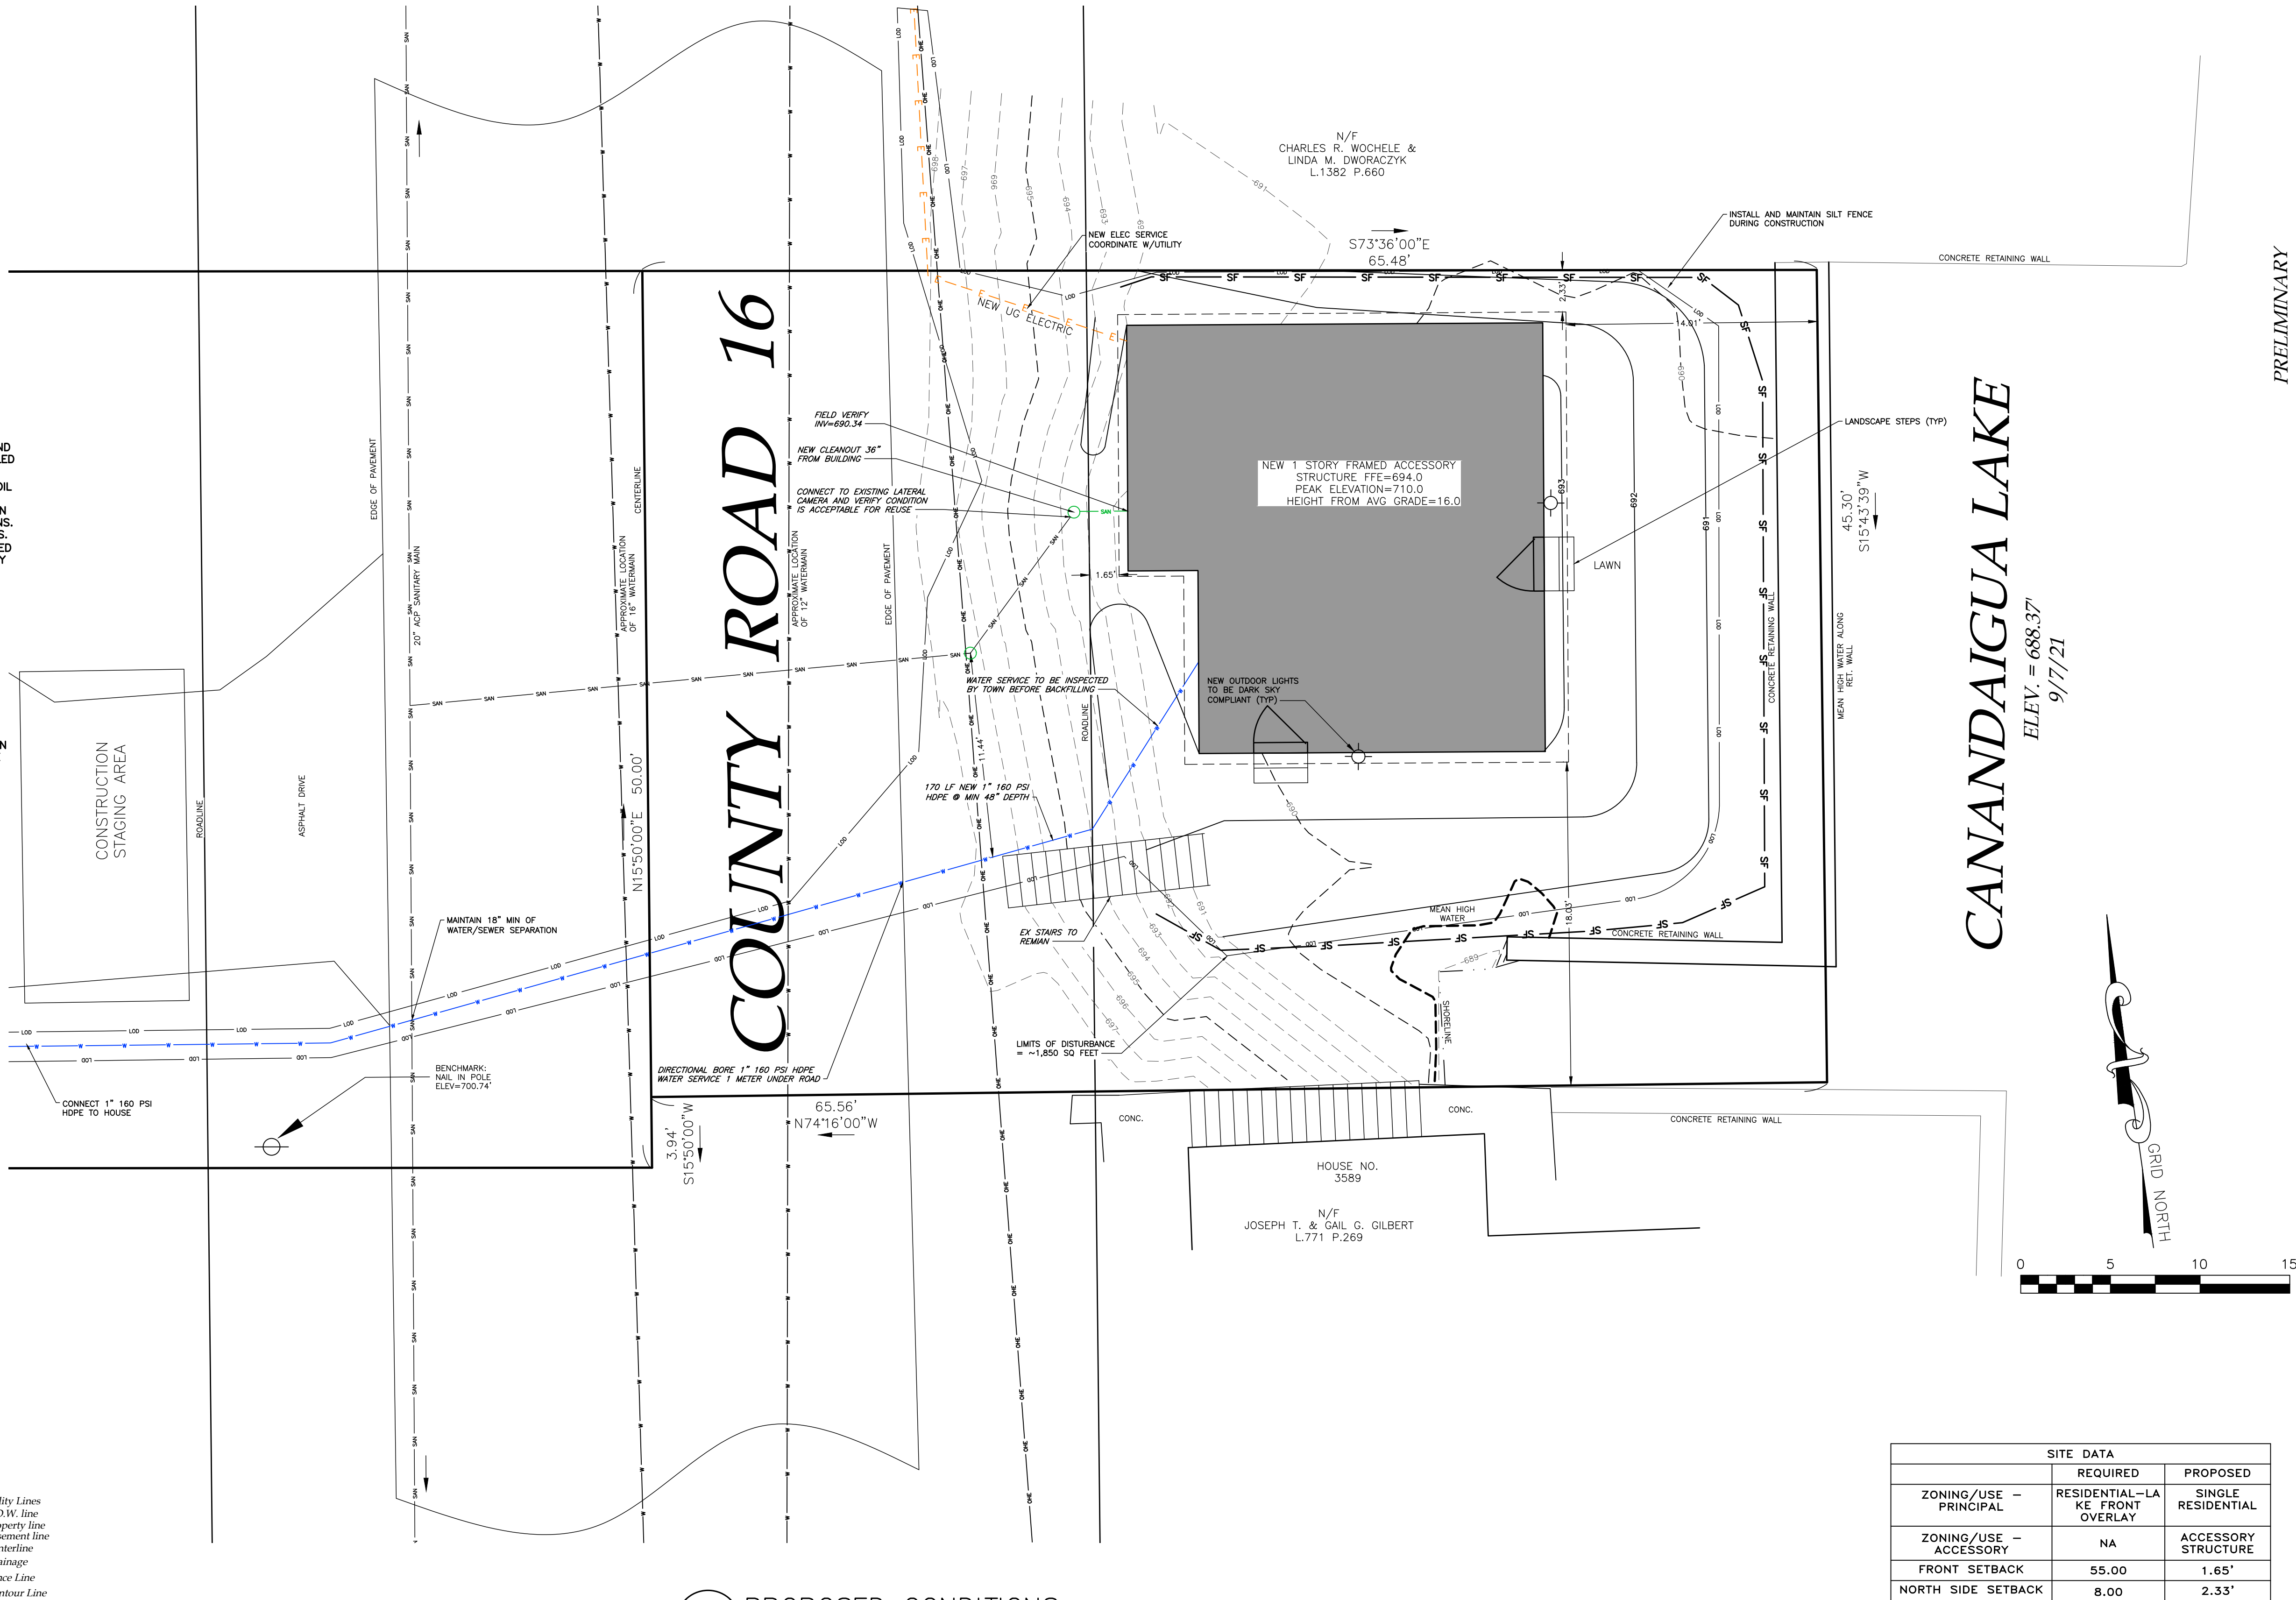

LEGEND			
	EXISTING	PROPOSED	Utility Lines
	ONE	E/T	R.O.W. line
	---	---	Property line
	---	---	Easement line
	---	---	Centerline
	---	---	Drainage
	---	---	Fence Line
	---	---	Contour Line
ABBREVIATIONS:			
EX-EXISTING	CO -CLEAN OUT	PERF-PERFORATED	
CPP-CORRUGATED POLYETHYLENE	TYP-TYPICAL	MIN-MINIMUM	
PIPE	R-RADIUS	MAX-MAXIMUM	
O/C-ON CENTER	BC-BOTTOM OF CURB	INW-INVERT	
SICPP-SMOOTH INTERIOR	TC-TOP OF CURB	CB-CATCH BASIN	
CORRUGATED POLYETHYLENE PIPE	TW-TOP OF WALL	MH-MANHOLE	
UG-UNDERGROUND	BW-BOTTOM OF WALL	DI-DRAINAGE INLET	
CONC-CONCRETE	BS-BOTTOM OF STAIRS		

HIGHWAY SUPERINTENDENT _____ DATE _____

PLANNING BOARD CHAIRMAN _____ DATE _____

SITE DATA		
ZONING/USE - PRINCIPAL	REQUIRED	PROPOSED
ZONING/USE - ACCESSORY	NA	ACCESSORY STRUCTURE
FRONT SETBACK	55.00	1.65'
NORTH SIDE SETBACK	8.00	2.33'
SOUTH SIDE SETBACK	8.00	18.03'
REAR SETBACK	15.00	14.01'
BUILDING HEIGHT	25'	22'
MAX LOT COVERAGE	25.00%	37.46%
MIN. GREEN SPACE	20.00%	62.54%


PLAN OF LAND OF
JUNE G. & ROGER M. HERMAN
SHOWING LAND IN:
3588 COUNTY ROAD 16
TOWN OF CANANDAIGUA
STATE OF NEW YORK
COUNTY OF ONTARIO

DRAWING TITLE:
PROPOSED CONDITIONS





DRAWN BY:	JPS
DESIGNED BY:	JPS
CHECKED BY:	BAM
SCALE:	1"=5'
JOB NO.:	21-143
DATE:	10/06/2021
TAX MAP#:	98.17-1-23.0

C100

MarksEngineering



47 BEAMAN ST
CANANDAIGUA, NY 14624
www.marksengineering.com
Phone: 985-905-5360
Fax: 985-485-6005
bmarks@marksengineering.com

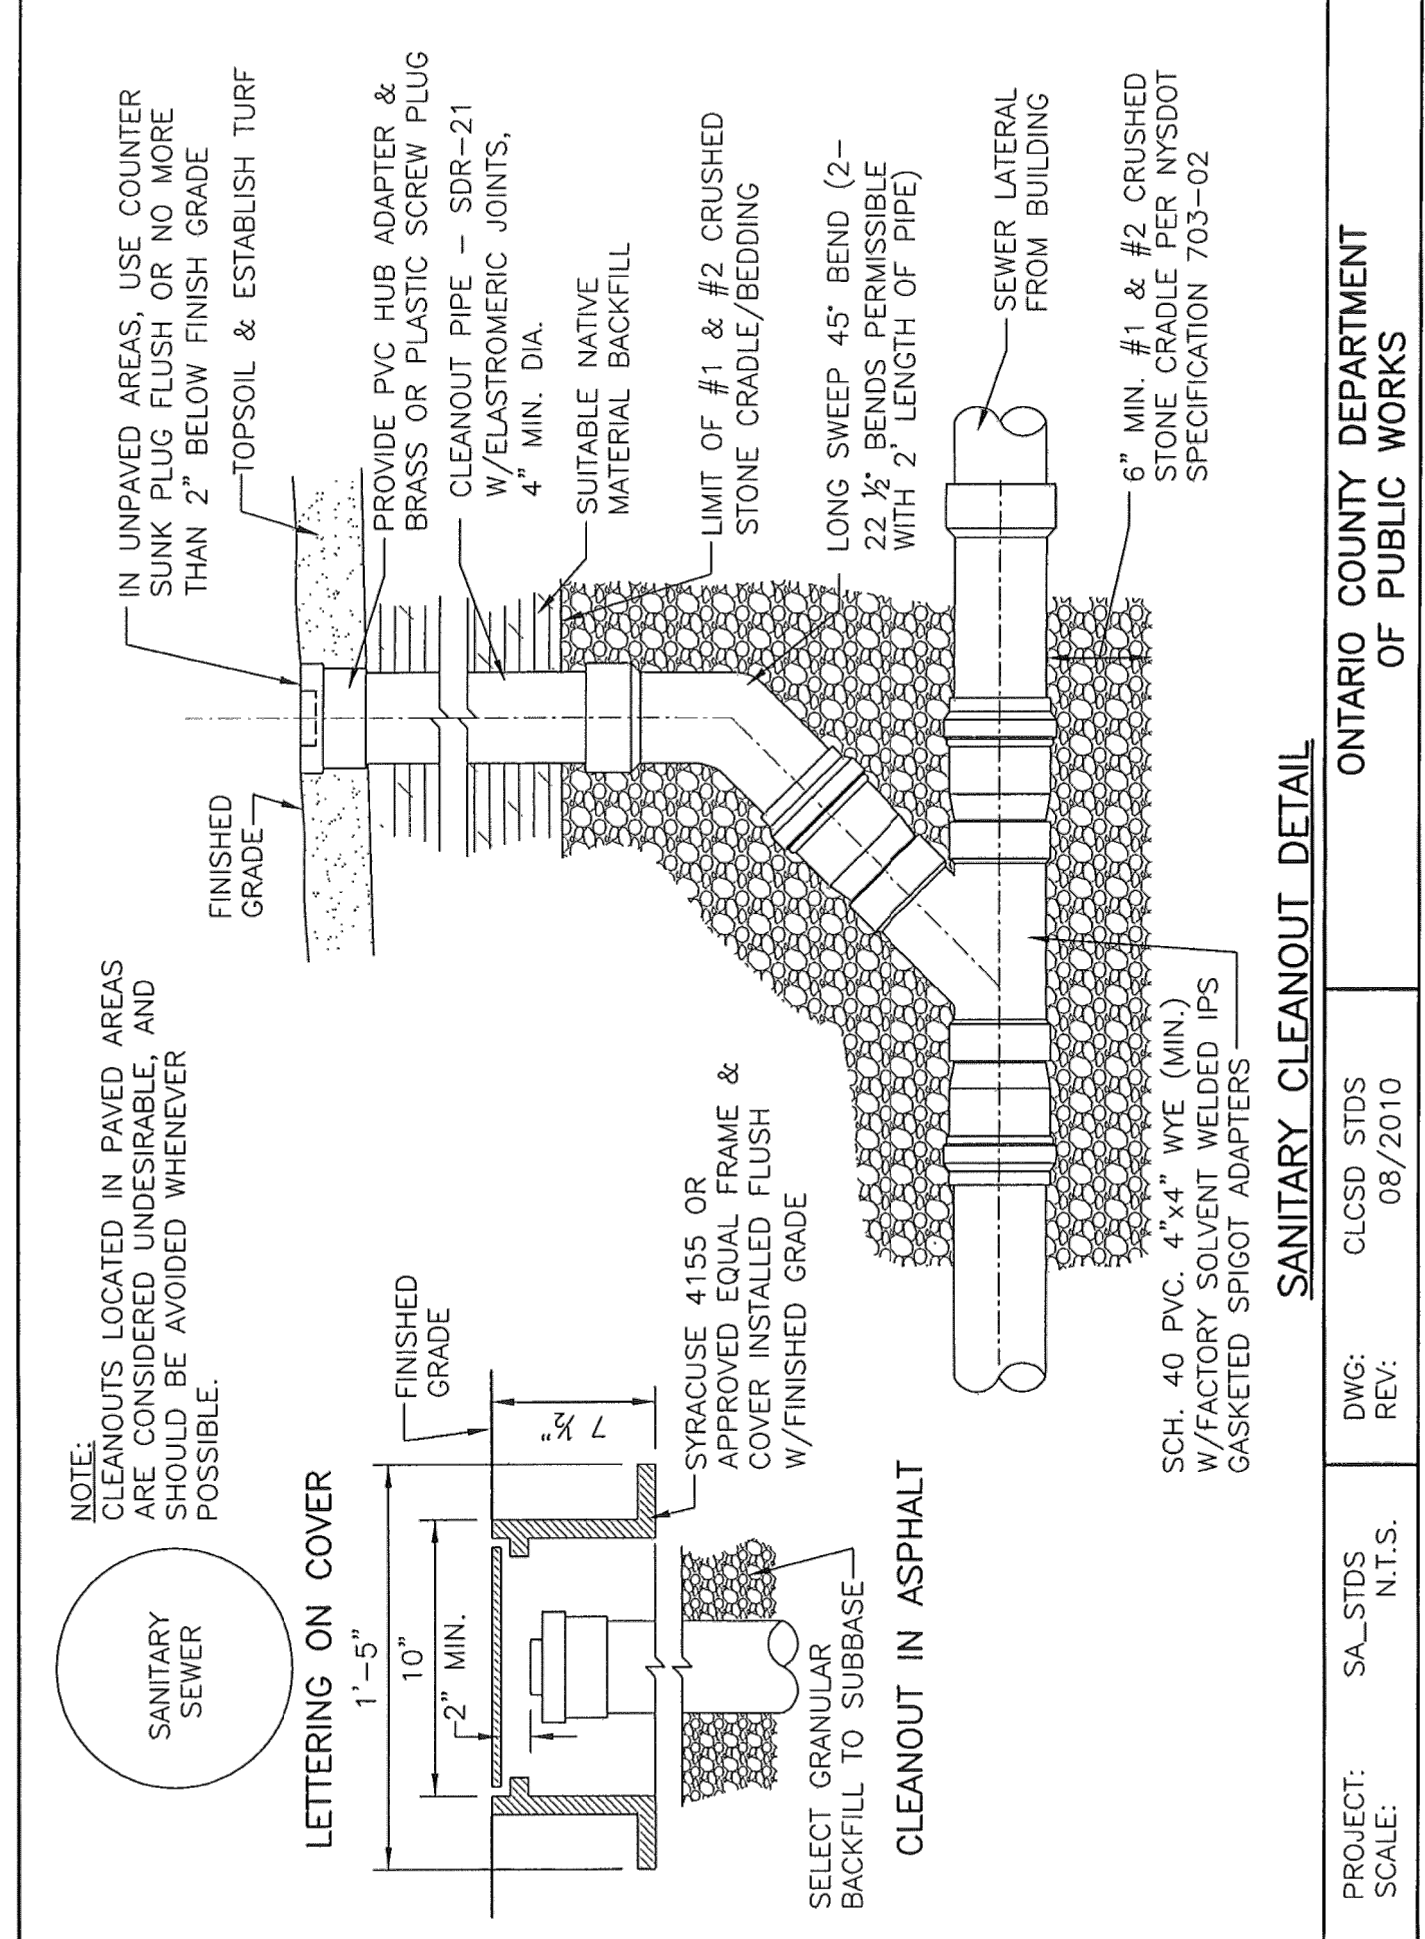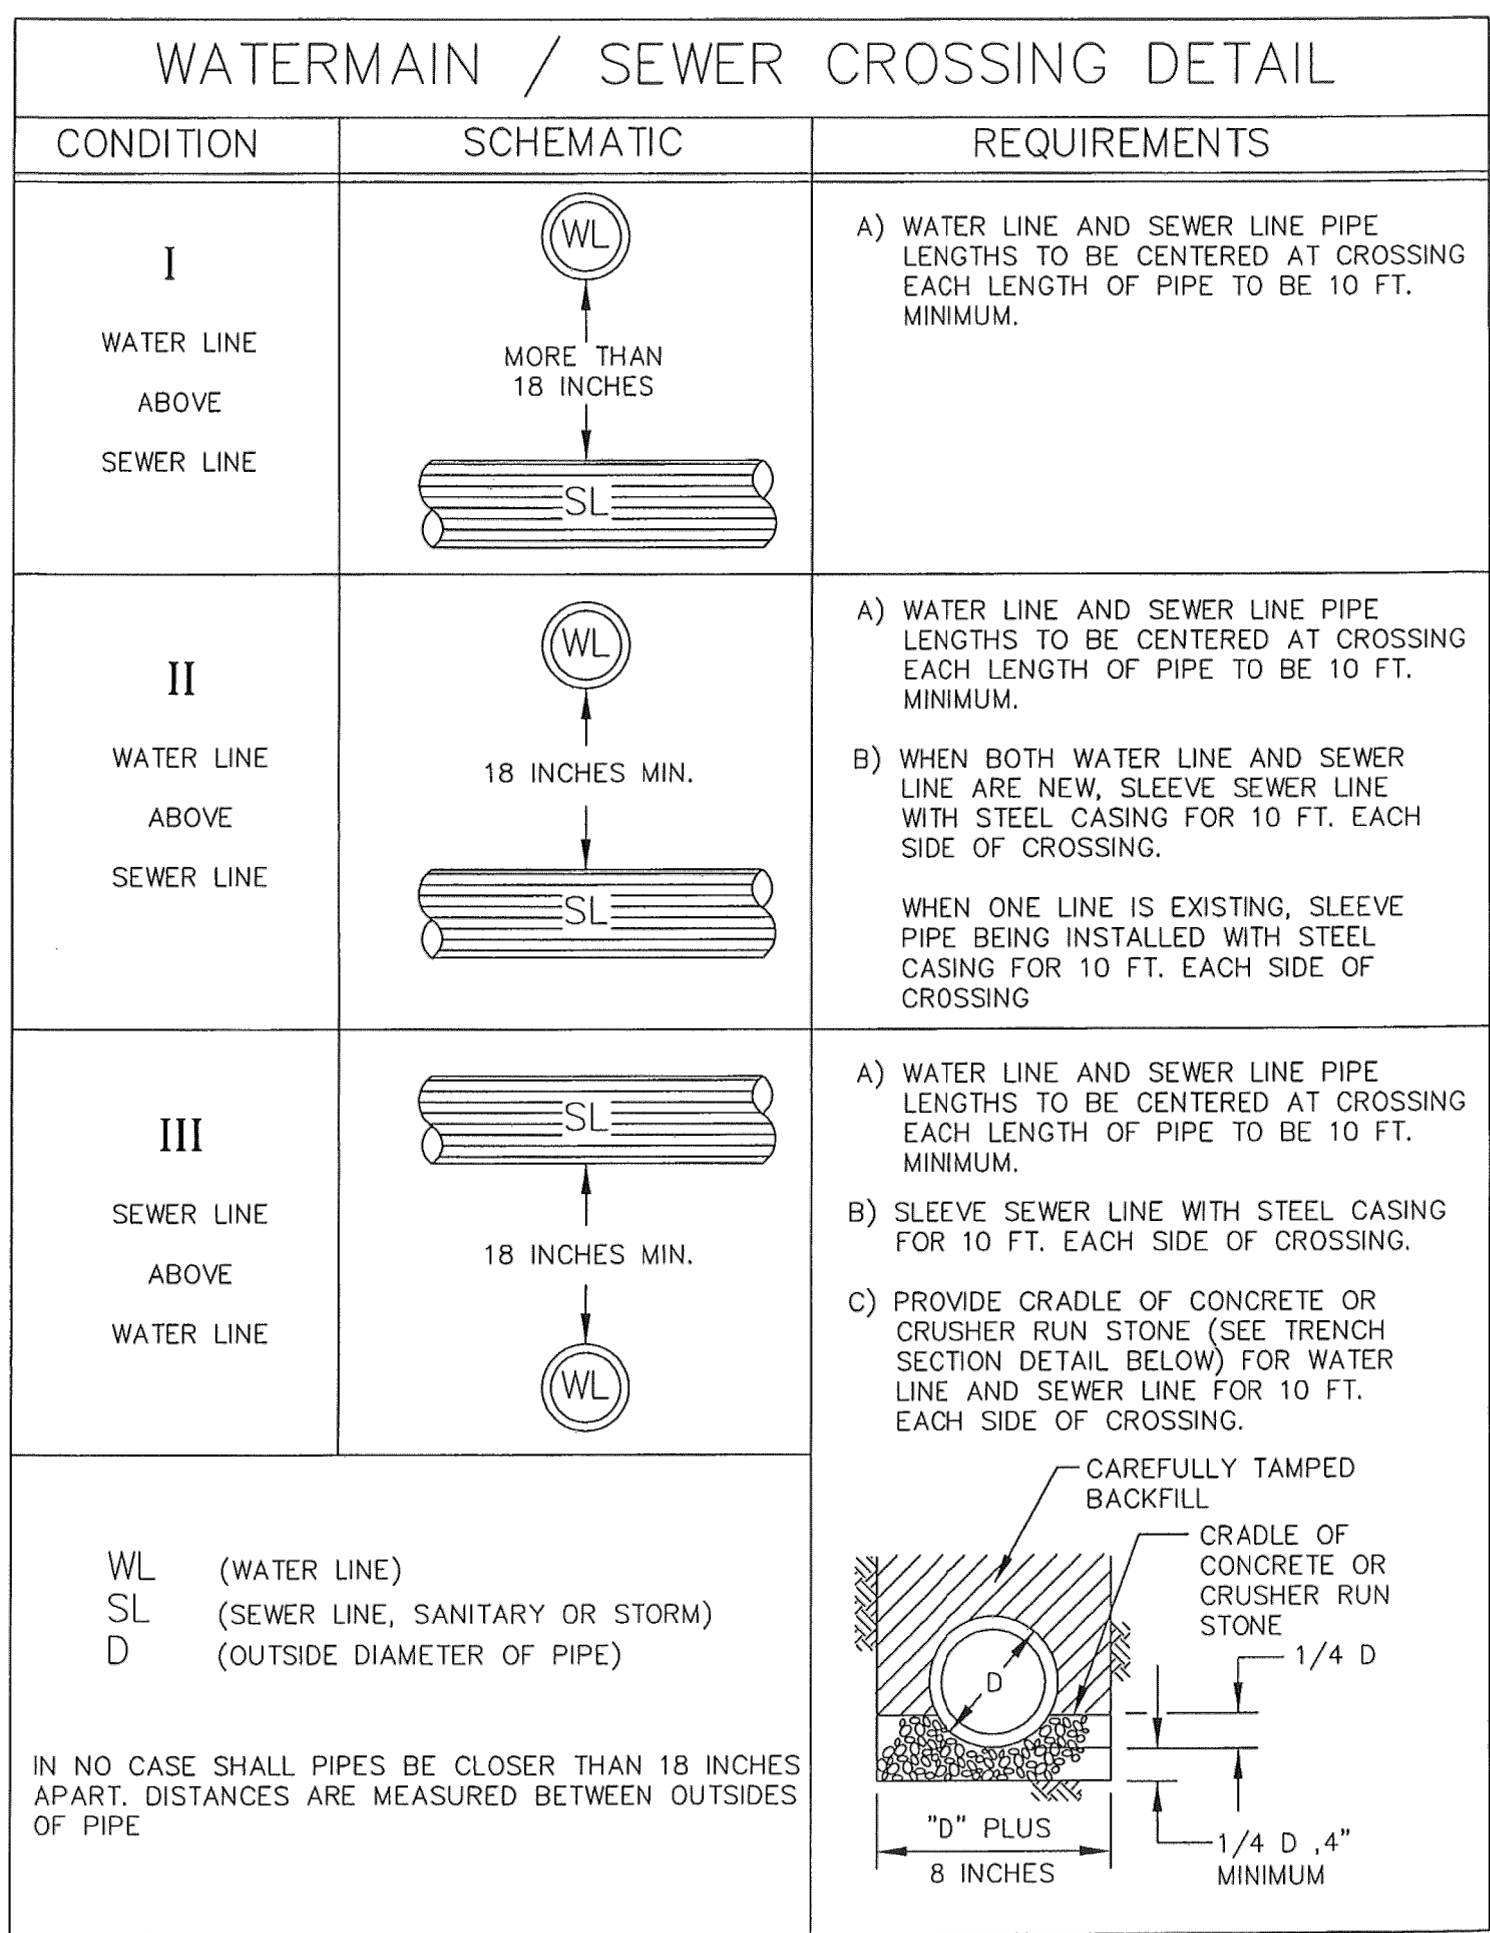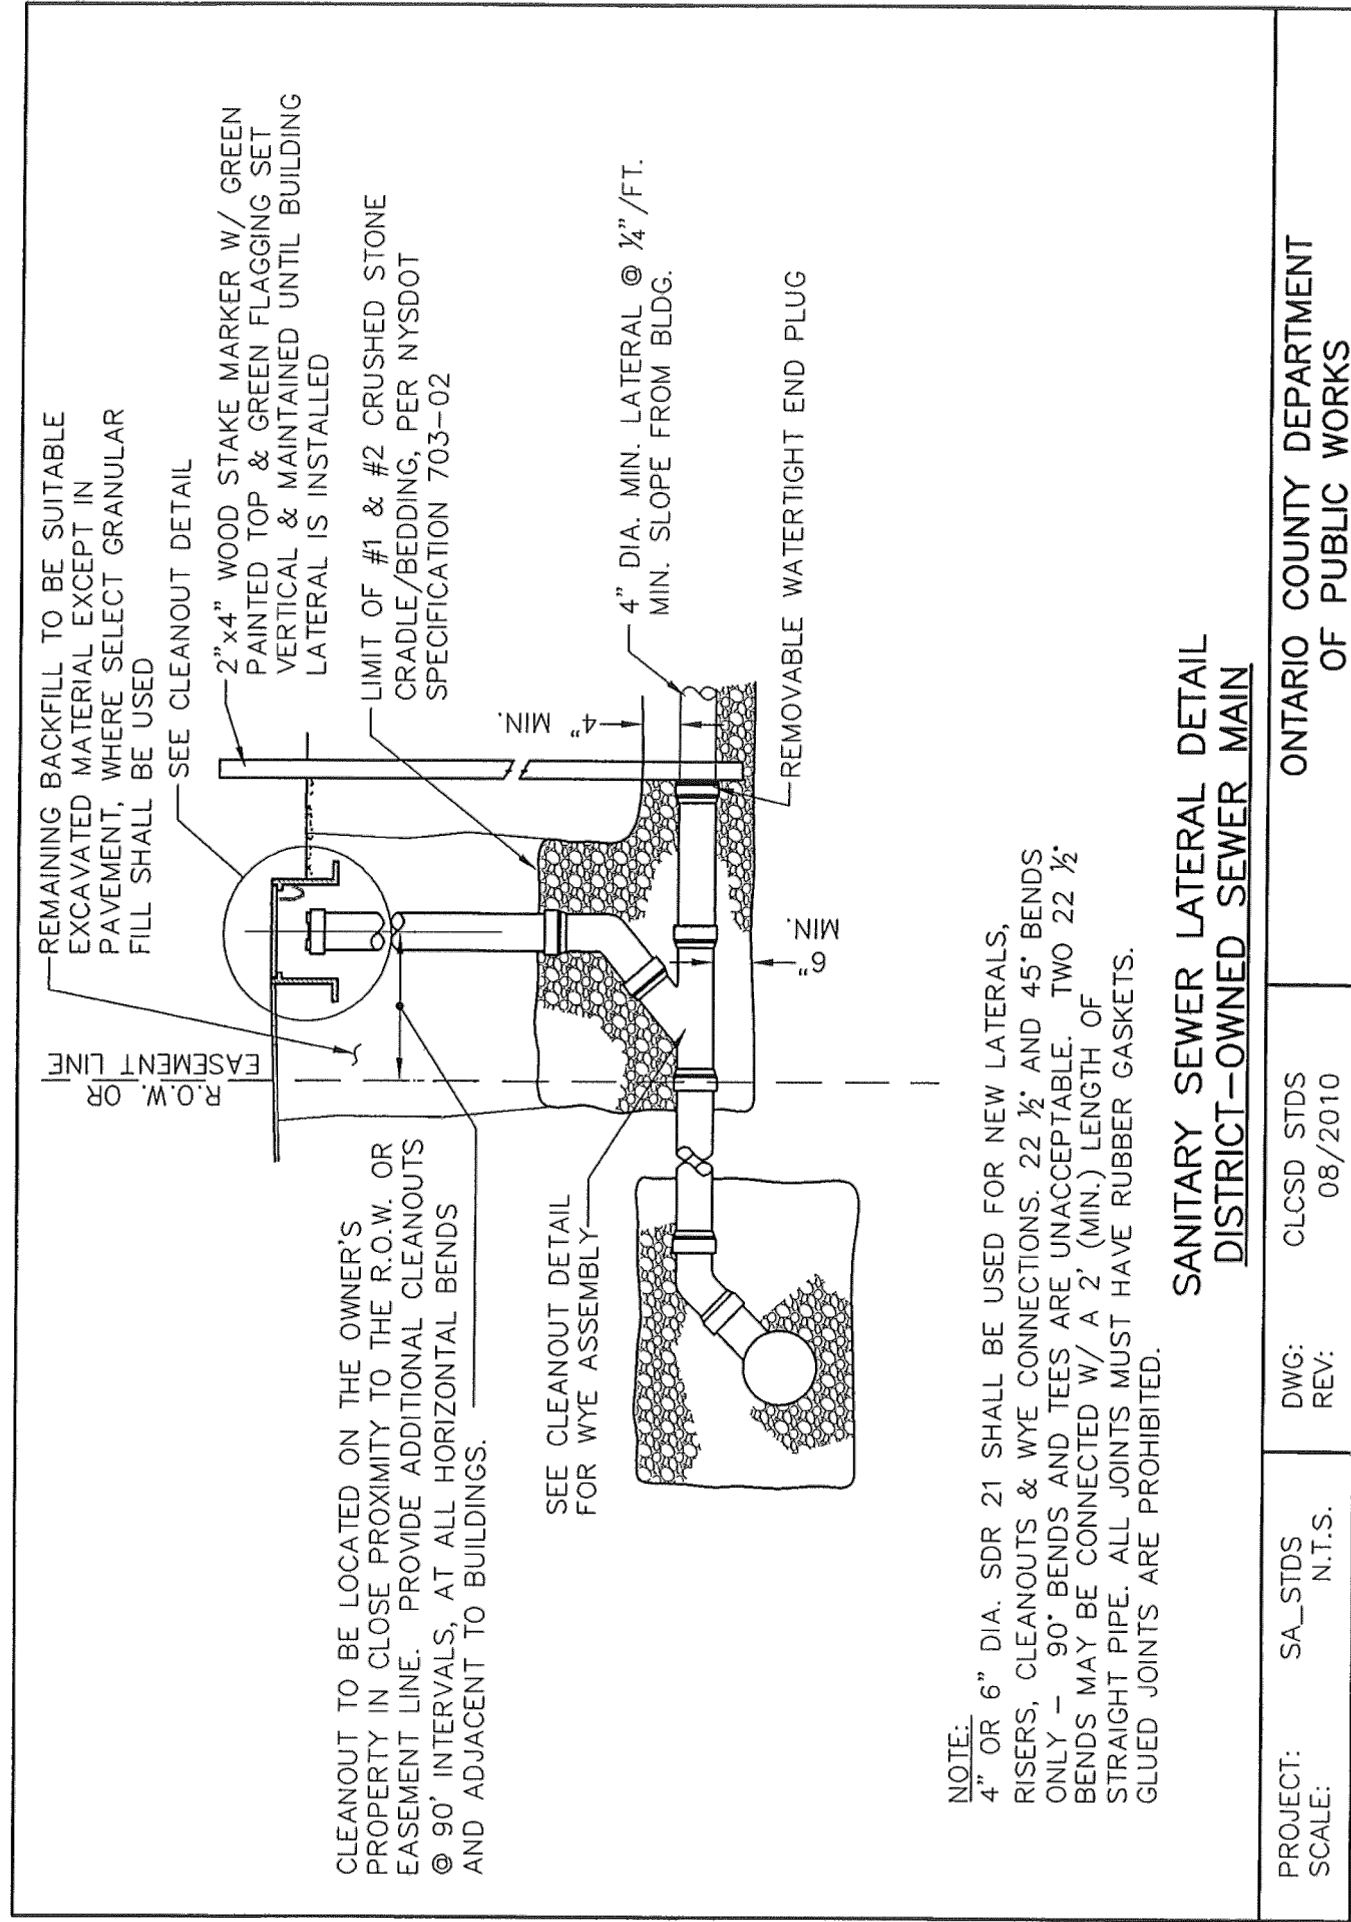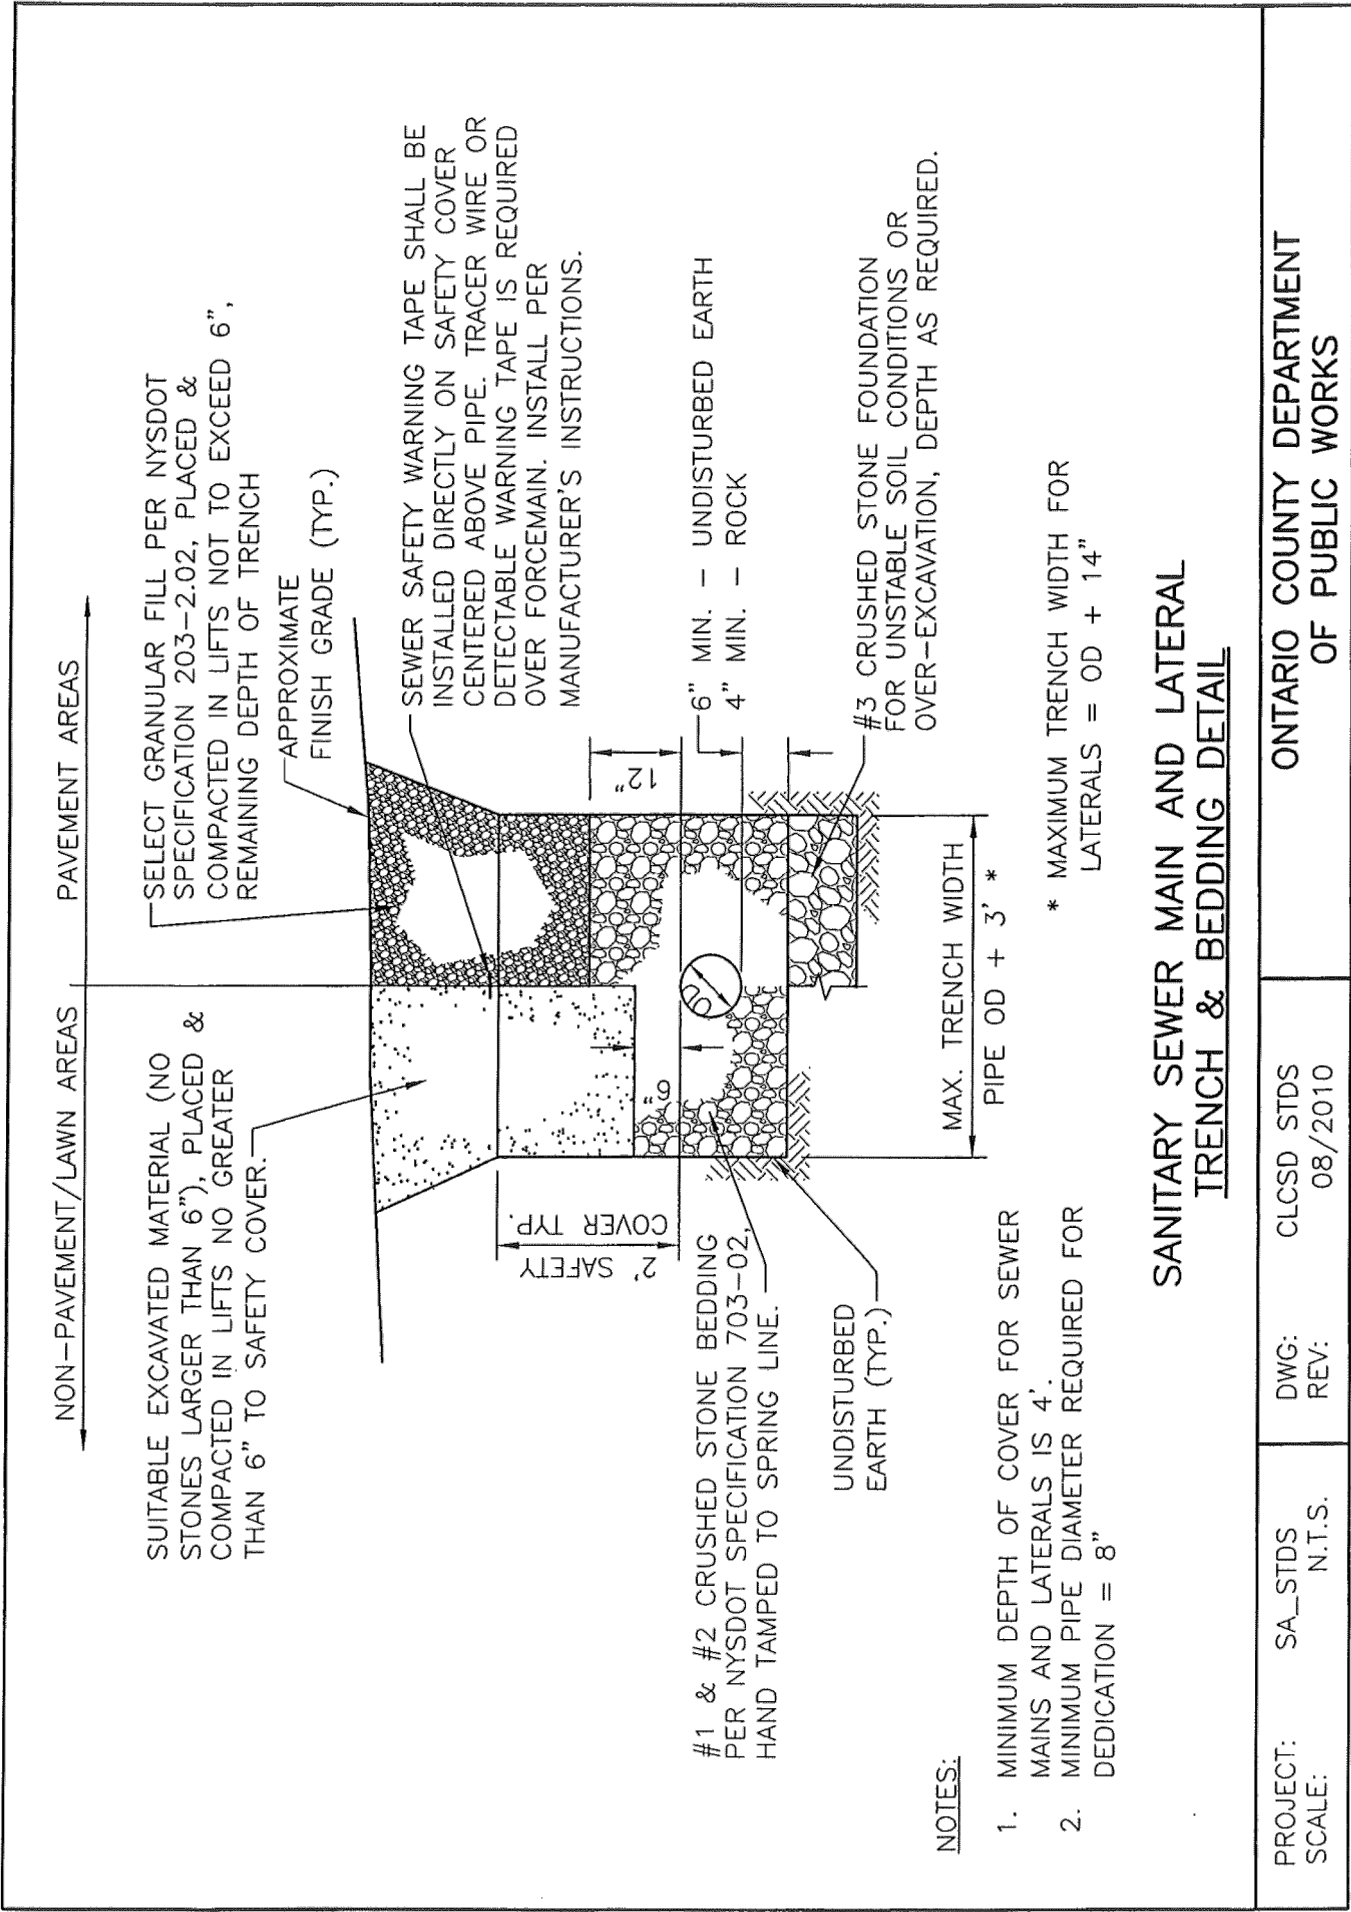


ALL PROJECTS

- All sanitary sewer construction and/or improvements shall be in accordance with the most recent standards and specifications of the Canandaigua Lake County Sewer District, N.Y.S. Department of Environmental Conservation, N.Y.S. Department of Health, the latest edition of Recommended Standards For Wastewater Facilities and any other agencies having jurisdiction.
- No sanitary sewer-related work may be performed without first obtaining a written permit from the Canandaigua Lake County Sewer District.
- District personnel shall be notified a minimum of 48 hours prior to beginning any sanitary sewer-related work.
- The contractor shall locate, mark and preserve any right of way monuments or survey control in the area of construction.
- Utility locations shown are approximate only. The contractor shall determine exact location of utilities, excavating to expose the utility, if necessary in the area of construction, before commencing construction. Contact U.F.P.O. at 1-800-962-7962 at least 72 hours prior to beginning work.
- Laterals shall be min. 4" dia. SDR-21 with elastomeric joints; for commercial establishments, laterals are to be 6" dia. SDR-21. Minimum depth of burial is four feet. Cleanouts shall be installed within 30 inches of the outside face of buildings, at all changes in horizontal alignment, at the right of way or easement line, and at spacing not to exceed 90 feet.
- Sewer mains and laterals shall be located a minimum horizontal distance of ten feet from any existing or proposed watermain (as measured from the outside of the sewer/lateral to the outside of the watermain). In cases where the main or lateral crosses a watermain, the minimum vertical separation shall be eighteen inches (measured out-to-out). The crossing shall be arranged so that the sewer joints will be equidistant and as far as possible from the watermain joints.
- The contractor shall provide the District with shop drawings and material specifications that have been pre-approved by the design engineer before a permit will be issued.
- The contractor is responsible for compliance with OSHA requirements in all aspects of construction.
- The contractor shall be responsible for maintaining sanitary flows at all times by methods acceptable to the District.
- Floor drains in basements or garages are to be connected to the sanitary sewer. Floor drains do not include foundation or footer drains installed to intercept uncontaminated groundwater. All discharges to the sanitary sewer must comply with effluent limits of the Ontario County Sewer Use Law. Foundation and footer drains shall be constructed in a manner that prohibits groundwater from draining into the sanitary sewer pipe cradle.
- Lateral connections requiring openings in asbestos cement pipe will be designed, inspected and certified by the design engineer or representative thereof.
- Any excavation not backfilled by the end of the workday shall be fenced, barricaded and lighted for safety and protection of the public.
- The contractor shall be responsible for the removal of existing sanitary mains, structures and appurtenances, if any, needed to complete the work.


RENOVATION PROJECTS ONLY

- Existing laterals to be disconnected must be permanently plugged or capped at the easement or right of way line under the direction of Canandaigua Lake County Sewer District personnel. The location of the plug or cap shall be recorded for as-built drawing purposes.
- Prior to demolishing an existing building, the contractor shall excavate, disconnect and abandon the lateral from the building to the point of disconnection (approximately 30' from the existing building) per District standards. A temporary plug shall be installed in the remaining portion of the existing sanitary lateral until it is tested and televised.
- In order to determine whether an existing sanitary lateral is acceptable for connection to a new building, the lateral shall be televised in the presence of District personnel at the owner's expense.
- If an existing lateral is found to be acceptable and meet the minimum District requirements, it shall be temporarily re-plugged and backfilled with a witness stake in place, until connection to the new building can take place.
- If a new sanitary sewer lateral is required, the existing lateral must be excavated, removed and capped at the easement or right of way line in accordance with District requirements.
- If a new sanitary sewer lateral is required, the connection to the existing sanitary main shall be made per District standards.


SANITARY LATERAL NOTES

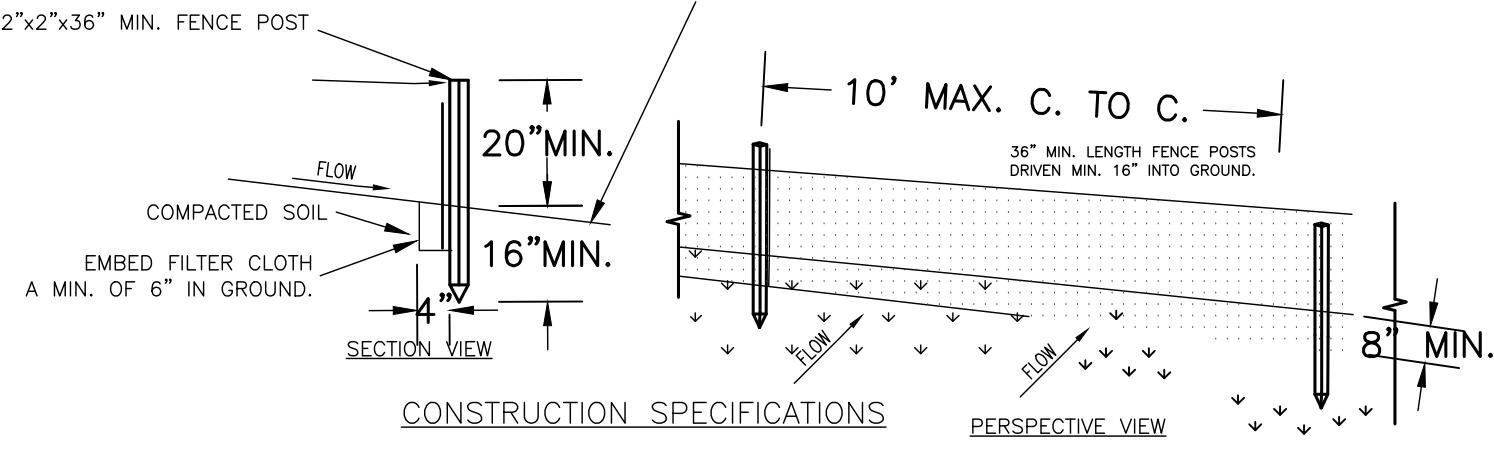

1 TYPICAL SILT FENCE DETAIL

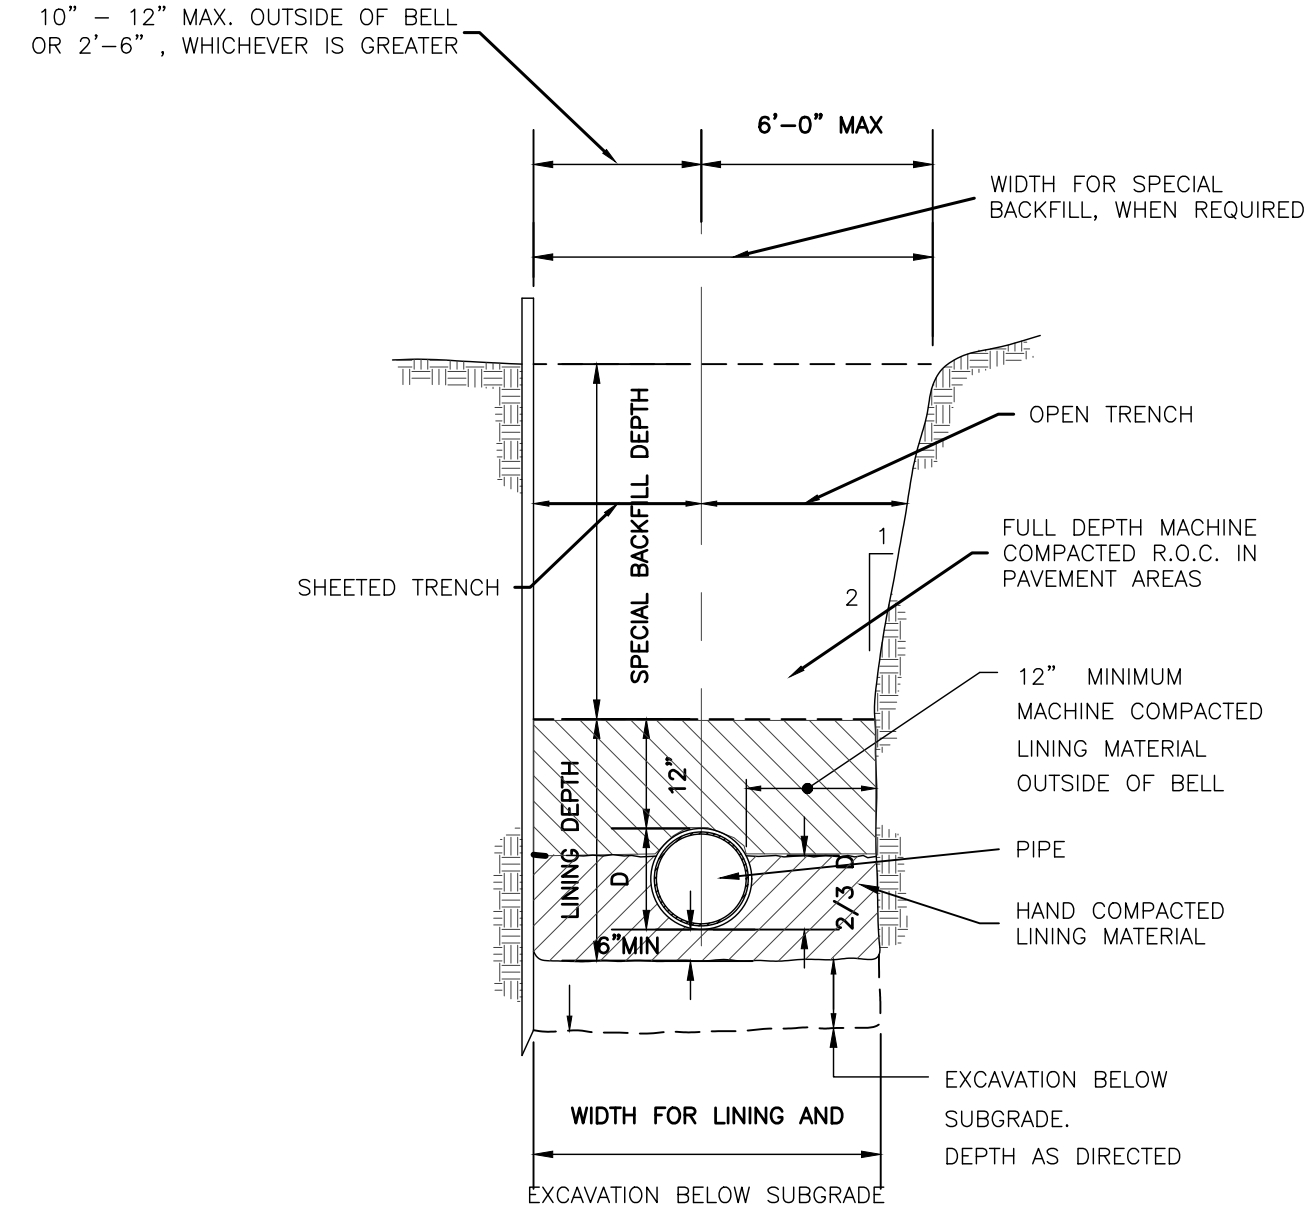

2 UTILITY TRENCH DETAIL

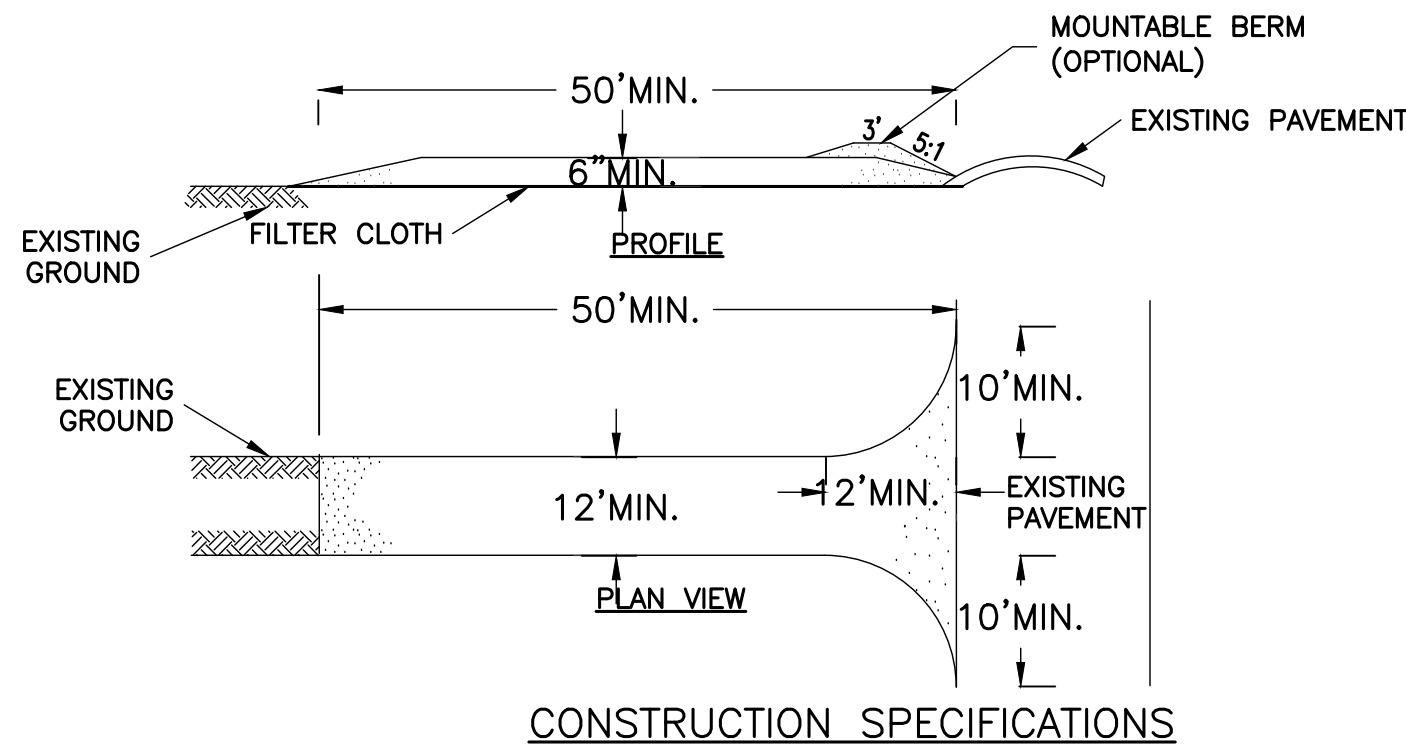

3 STABILIZED CONSTRUCTION ENTRANCE

MarksEngineering

47 BEAMAN ST
CANANDAIGUA, NY 14424
Phone: 585-905-9360
Fax: 585-485-6205
www.marksengineering.com marksengineering.com

PRELIMINARY

STAMP

STAMP

REVIEWS AND APPROVALS

NO.	DATE	DESCRIPTION OF REVISION OR APPROVAL	BY
1	10/21/21	TOWN OF CANANDAIGUA	JPS

PLAN OF LAND OF
JUNE G. & ROGER M. HERMAN
SHOWING LAND IN:
3588 COUNTY ROAD 16
TOWN OF CANANDAIGUA

COUNTY OF ONTARIO

STATE OF NEW YORK

DRAWING TITLE:
DETAILS

DRAWN BY:	JPS
DESIGNED BY:	JPS
CHECKED BY:	BAM
SCALE:	AS NOTED
JOB NO.:	21-143
DATE:	10/06/2021
TAX MAP#:	98.17-1-23.0

C500

COPYRIGHTS RESERVED. THIS SHALL NOT BE COPIED OR ALTERED IN ANY MANNER WITHOUT PERMISSION. MARK MARKS ENGINEERING P.C. ALL RIGHTS ARE PART OF AN AGREEMENT THAT IS SUBJECT TO TERMS AND CONDITIONS FURNISHED BY WWW.MARKSENGINEERING.COM