




- GENERAL & UTILITY NOTES
1. DEVELOPER SHALL PROVIDE FOR EROSION CONTROL BARRIERS WHERE NEEDED DURING CONSTRUCTION. EROSION CONTROL SHALL NOT BE REMOVED UNTIL APPROVAL HAS BEEN GRANTED BY THE TOWN OF CANANDAIGUA.
 2. ROADWAY DRAINAGE ALONG COUNTY ROAD 16 TO BE MAINTAINED AS NECESSARY.
 3. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PRESERVE AND PROTECT ALL SURVEY MONUMENTATION.
 4. FILL AREAS TO BE IMMEDIATELY SEED TO PREVENT EROSION.
 5. SAFE AND CONTINUOUS TRAFFIC AND INGRESS AND EGRESS FOR ADJACENT OWNER DRIVEWAYS, SERVICE AND PUBLIC ROADS SHALL BE MAINTAINED THROUGHOUT THE PERIOD OF CONSTRUCTION.
 6. ALL CONSTRUCTION STAGING WILL OCCUR OUTSIDE OF THE RIGHT-OF-WAY.
 7. MATERIAL BROUGHT TO THE SITE SHALL BE CLEAN RILL, FREE OF ORGANICS, WASTES, AND FROZEN MATERIAL.
 8. THE CONTRACTOR SHALL INSTALL ALL EROSION CONTROL DEVICES PRIOR TO COMMENCING EARTHWORK OPERATIONS.
 9. ALL CONSTRUCTION SHALL CONFORM WITH ALL FEDERAL, STATE, AND LOCAL CONSTRUCTION STANDARDS.

CONSTRUCTION SEQUENCE:

1. INSTALL PERIMETER SEDIMENT CONTROLS, (I.E. TURBIDITY CURTAIN).
2. PROTECT VEGETATION TO REMAIN.
3. CLEAR AND REMOVE VEGETATION FROM SITE WHERE NECESSARY.
4. INSTALL JUTE MESH IN ALL DISTURBED AREAS WITH A SLOPE GREATER THAN 3:1.
5. INSTALL EROSION CONTROL MEASURES AROUND STOCKPILE LOCATIONS.
6. INSPECT ALL EROSION CONTROL DEVICES DAILY AND REPAIR AS NECESSARY.
7. RESTORE AREAS AS DEFINED BY CONTRACT DOCUMENTS.
8. REMOVE EROSION CONTROL MEASURES AS AREAS REESTABLISH WITH GROUND COVER.
9. IF SITE PREPARATIONS OCCUR BETWEEN SEPTEMBER 1 AND MARCH 31, ADDITIONAL EROSION CONTROLS MUST BE TAKEN INCLUDING REDUCING THE SIZE OF DISTURBED AREAS AND PLACING HEAVY STRAW MULCH WHERE PRACTICAL.

CONCRETE & FOUNDATION NOTES

1. CONCRETE WORK, CONSTRUCTION AND REINFORCING DETAILS SHALL CONFORM TO "THE SPECIFICATIONS OF THE AMERICAN CONCRETE INSTITUTE BUILDING CODE REQUIREMENTS" (ACI 318).
2. FOUNDATION CONCRETE SHALL ATTAIN A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI (AIR ENTRAINMENT) AT 28 DAYS.
3. REINFORCING STEEL SHALL CONFORM TO ASTM A615 GRADE 60. LAP SPLICES AND EMBEDMENT LENGTHS SHALL CONFORM TO ACI 318, CHAPTER 12. PROVIDE CORNER BARS TO MATCH HORIZONTAL REINFORCING WHERE WALLS OR BEAMS MEET AT CORNERS OR INTERSECT. THIS ALSO INCLUDES INTERSECTIONS OF CONCRETE WITH MASONRY WORK.
4. PROVIDE SHOP DRAWINGS FOR REINFORCING INCLUDING ALL NECESSARY ACCESSORIES.
5. SPREAD FOOTINGS SHALL REST ON UNDISTURBED SOIL COMPACTED. ENGINEERED FILL OR SOLID ROCK HAVING A MINIMUM BEARING CAPACITY OF 3,000 PSF. BEARING CAPACITY OF SUBGRADE SHALL BE VERIFIED BY A QUALIFIED GEOTECHNICAL ENGINEER.
6. IN GENERAL, EXTERIOR CONSTRUCTION SHALL BE CARRIED DOWN A MINIMUM OF 4'-0" BELOW FINISHED EXTERIOR GRADE UNLESS NOTED OTHERWISE. (2'-0" MINIMUM AT ROCK BEARING WITHOUT POSSIBILITY OF FROST HEAVE).
7. ALL FOOTINGS SHALL BE CENTERED UNDER SUPPORTED MEMBERS, UNLESS NOTED OTHERWISE.





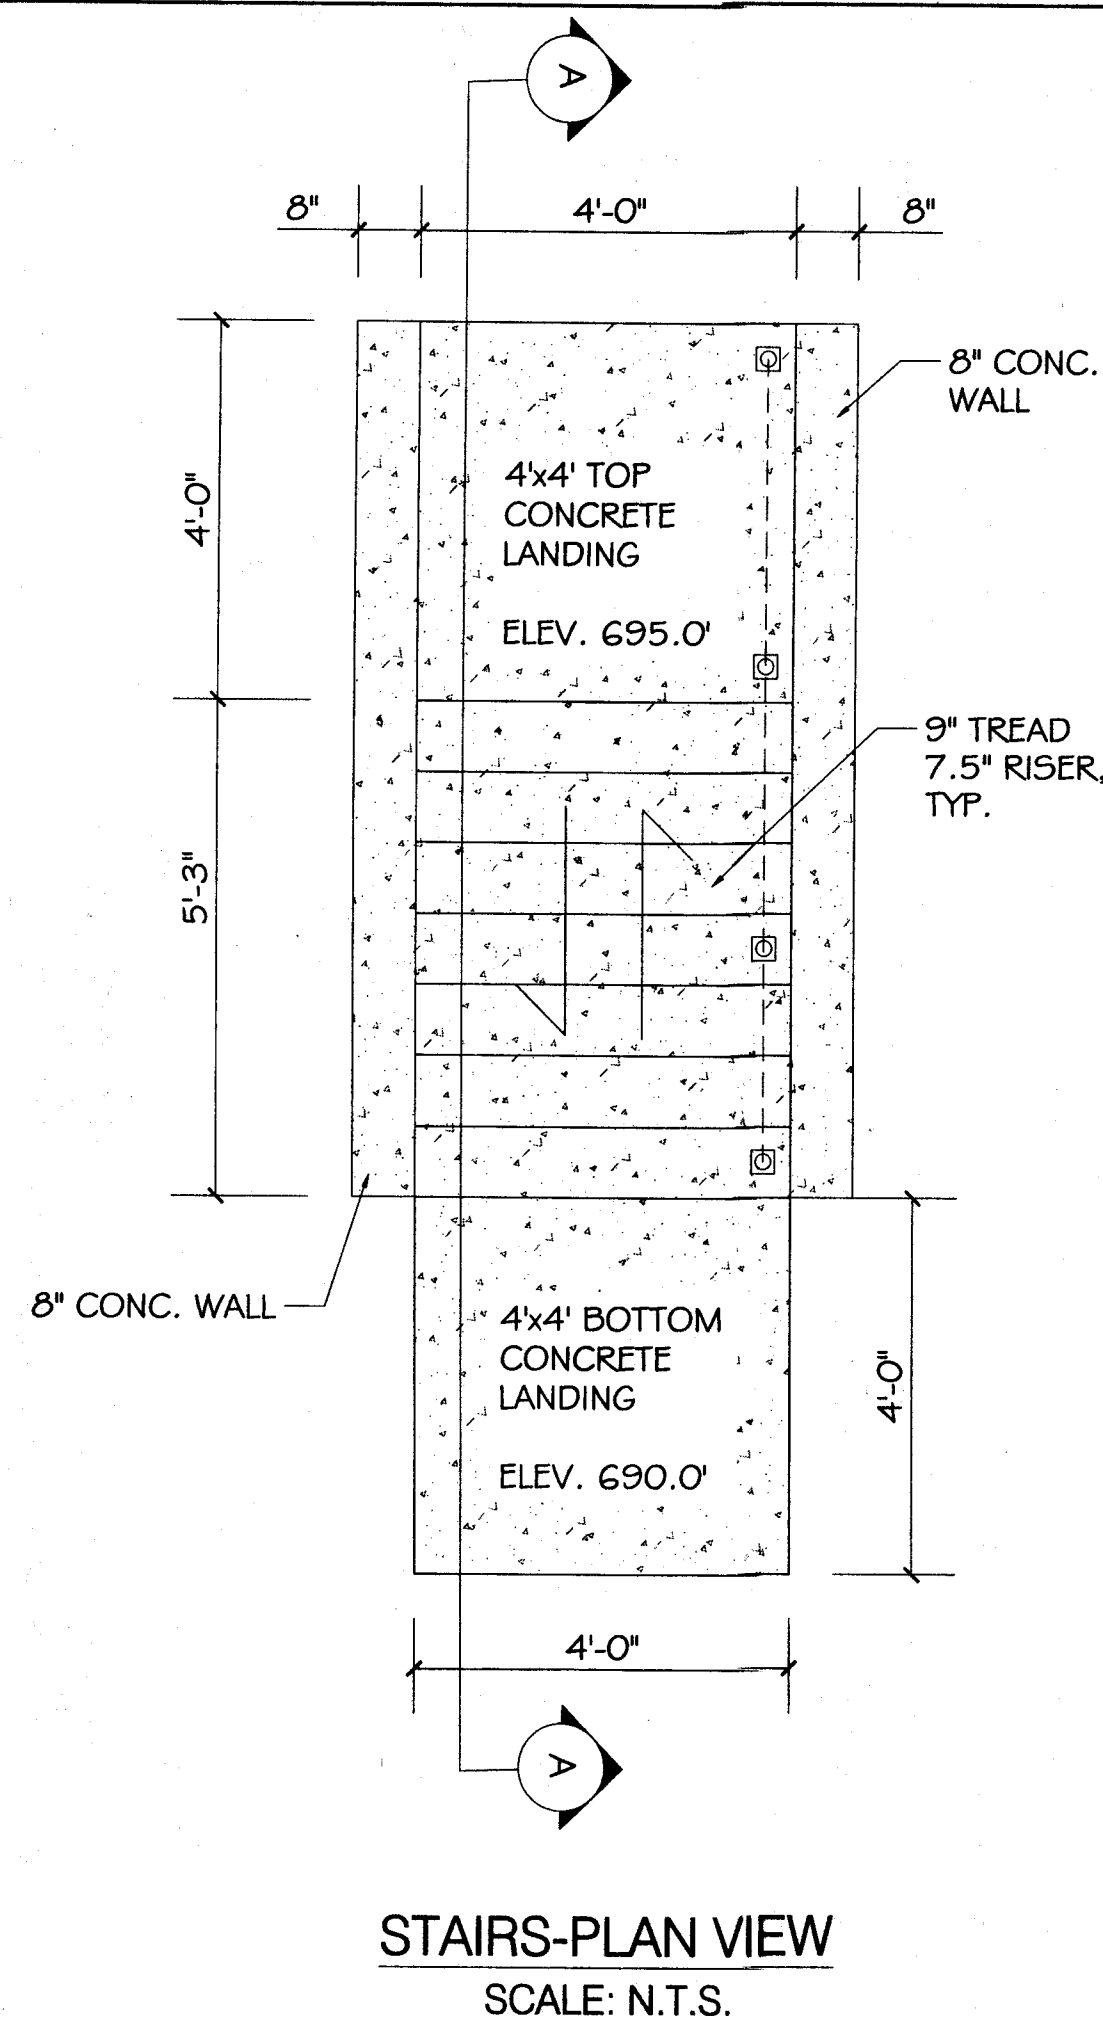
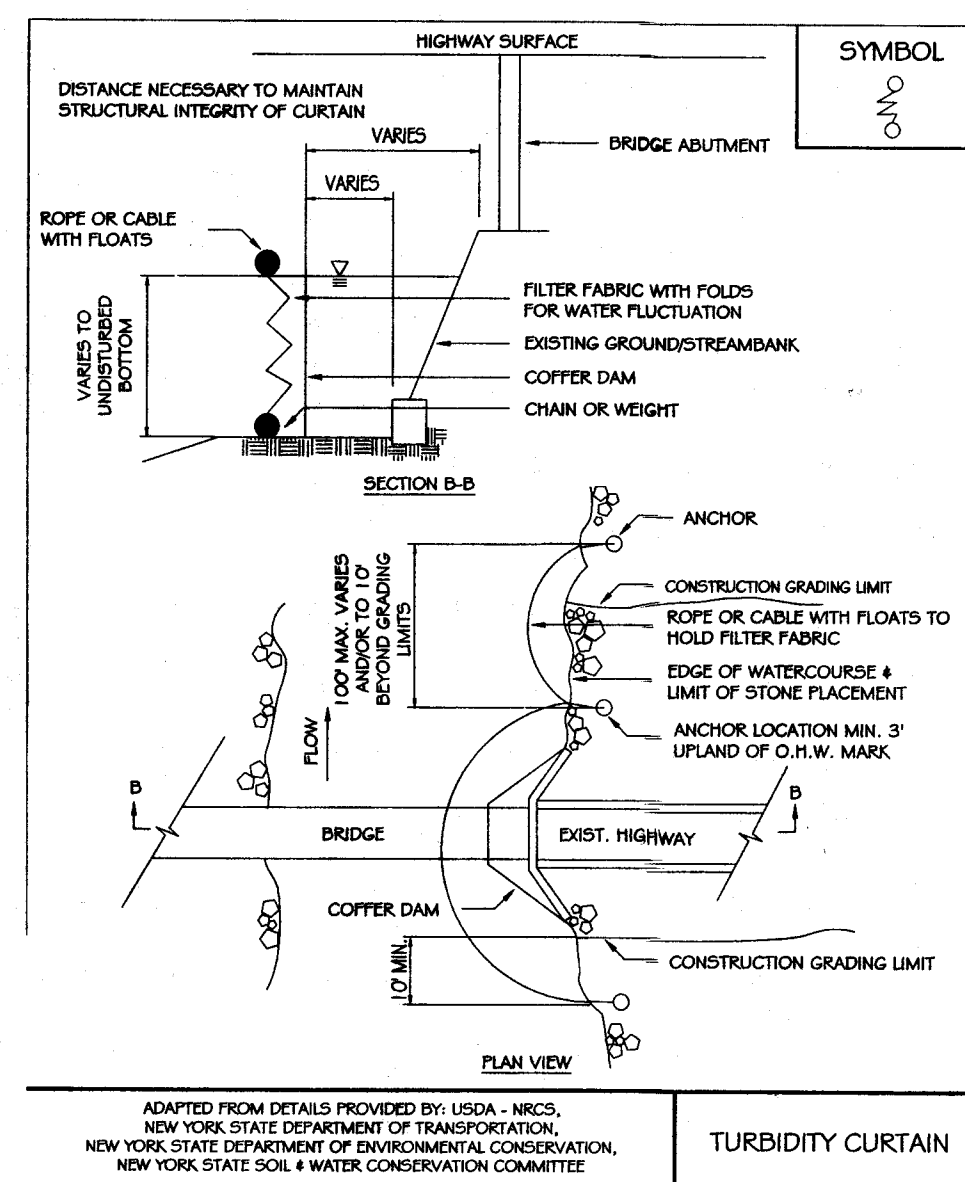
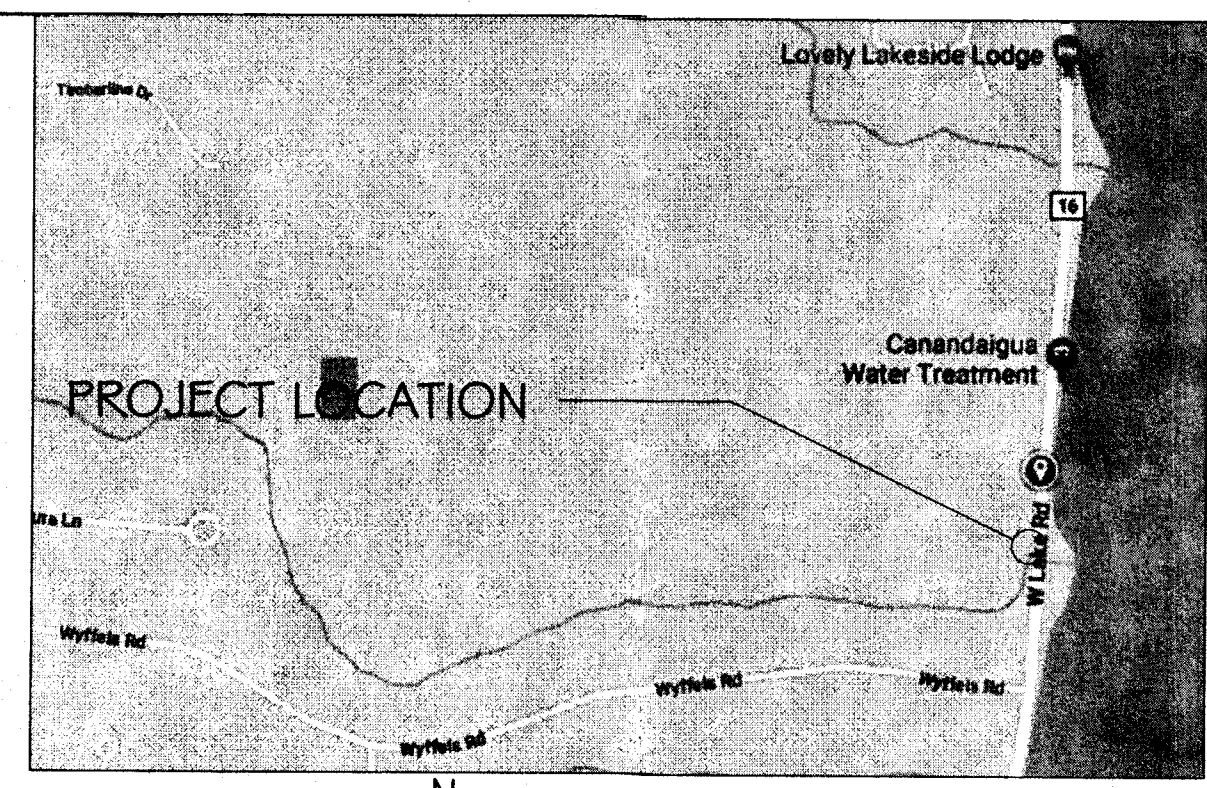


COPYRIGHT PROTECTION
UNLESS OTHERWISE NOTED, ALL INFORMATION SHOWN HEREON IS STRICTLY PROHIBITED. ANY SUCH REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF MEAGHER ENGINEERING, PLLC, 2019.


REVISIONS:	NO.	DESCRIPTION	DATE
E	REVISED PER MRB GROUP	9.24.19	
D	STAIR RELOCATION	8.15.19	
C	REVISED PER NYSDEC	6.10.19	
B	REVISED PER NYSDEC	4.29.19	
A	AS NOTED		

JOB NO. 18989
DRAWN: BLH
DATE: 6/11/2019
CHECKED: WLM
DATE: 9/24/2019
SCALE: AS NOTED

UNAUTHORIZED ALTERATIONS OR ADDITIONS TO THIS DRAWING ARE PROHIBITED. ANY SUCH VIOLATIONS OF THE NYS EDUC. LAW, ARTICLE 147 SECTION 7205, NO REVISIONS ARE PERMITTED UNLESS AUTHORIZED BY THE ENGINEER OF RECORD.

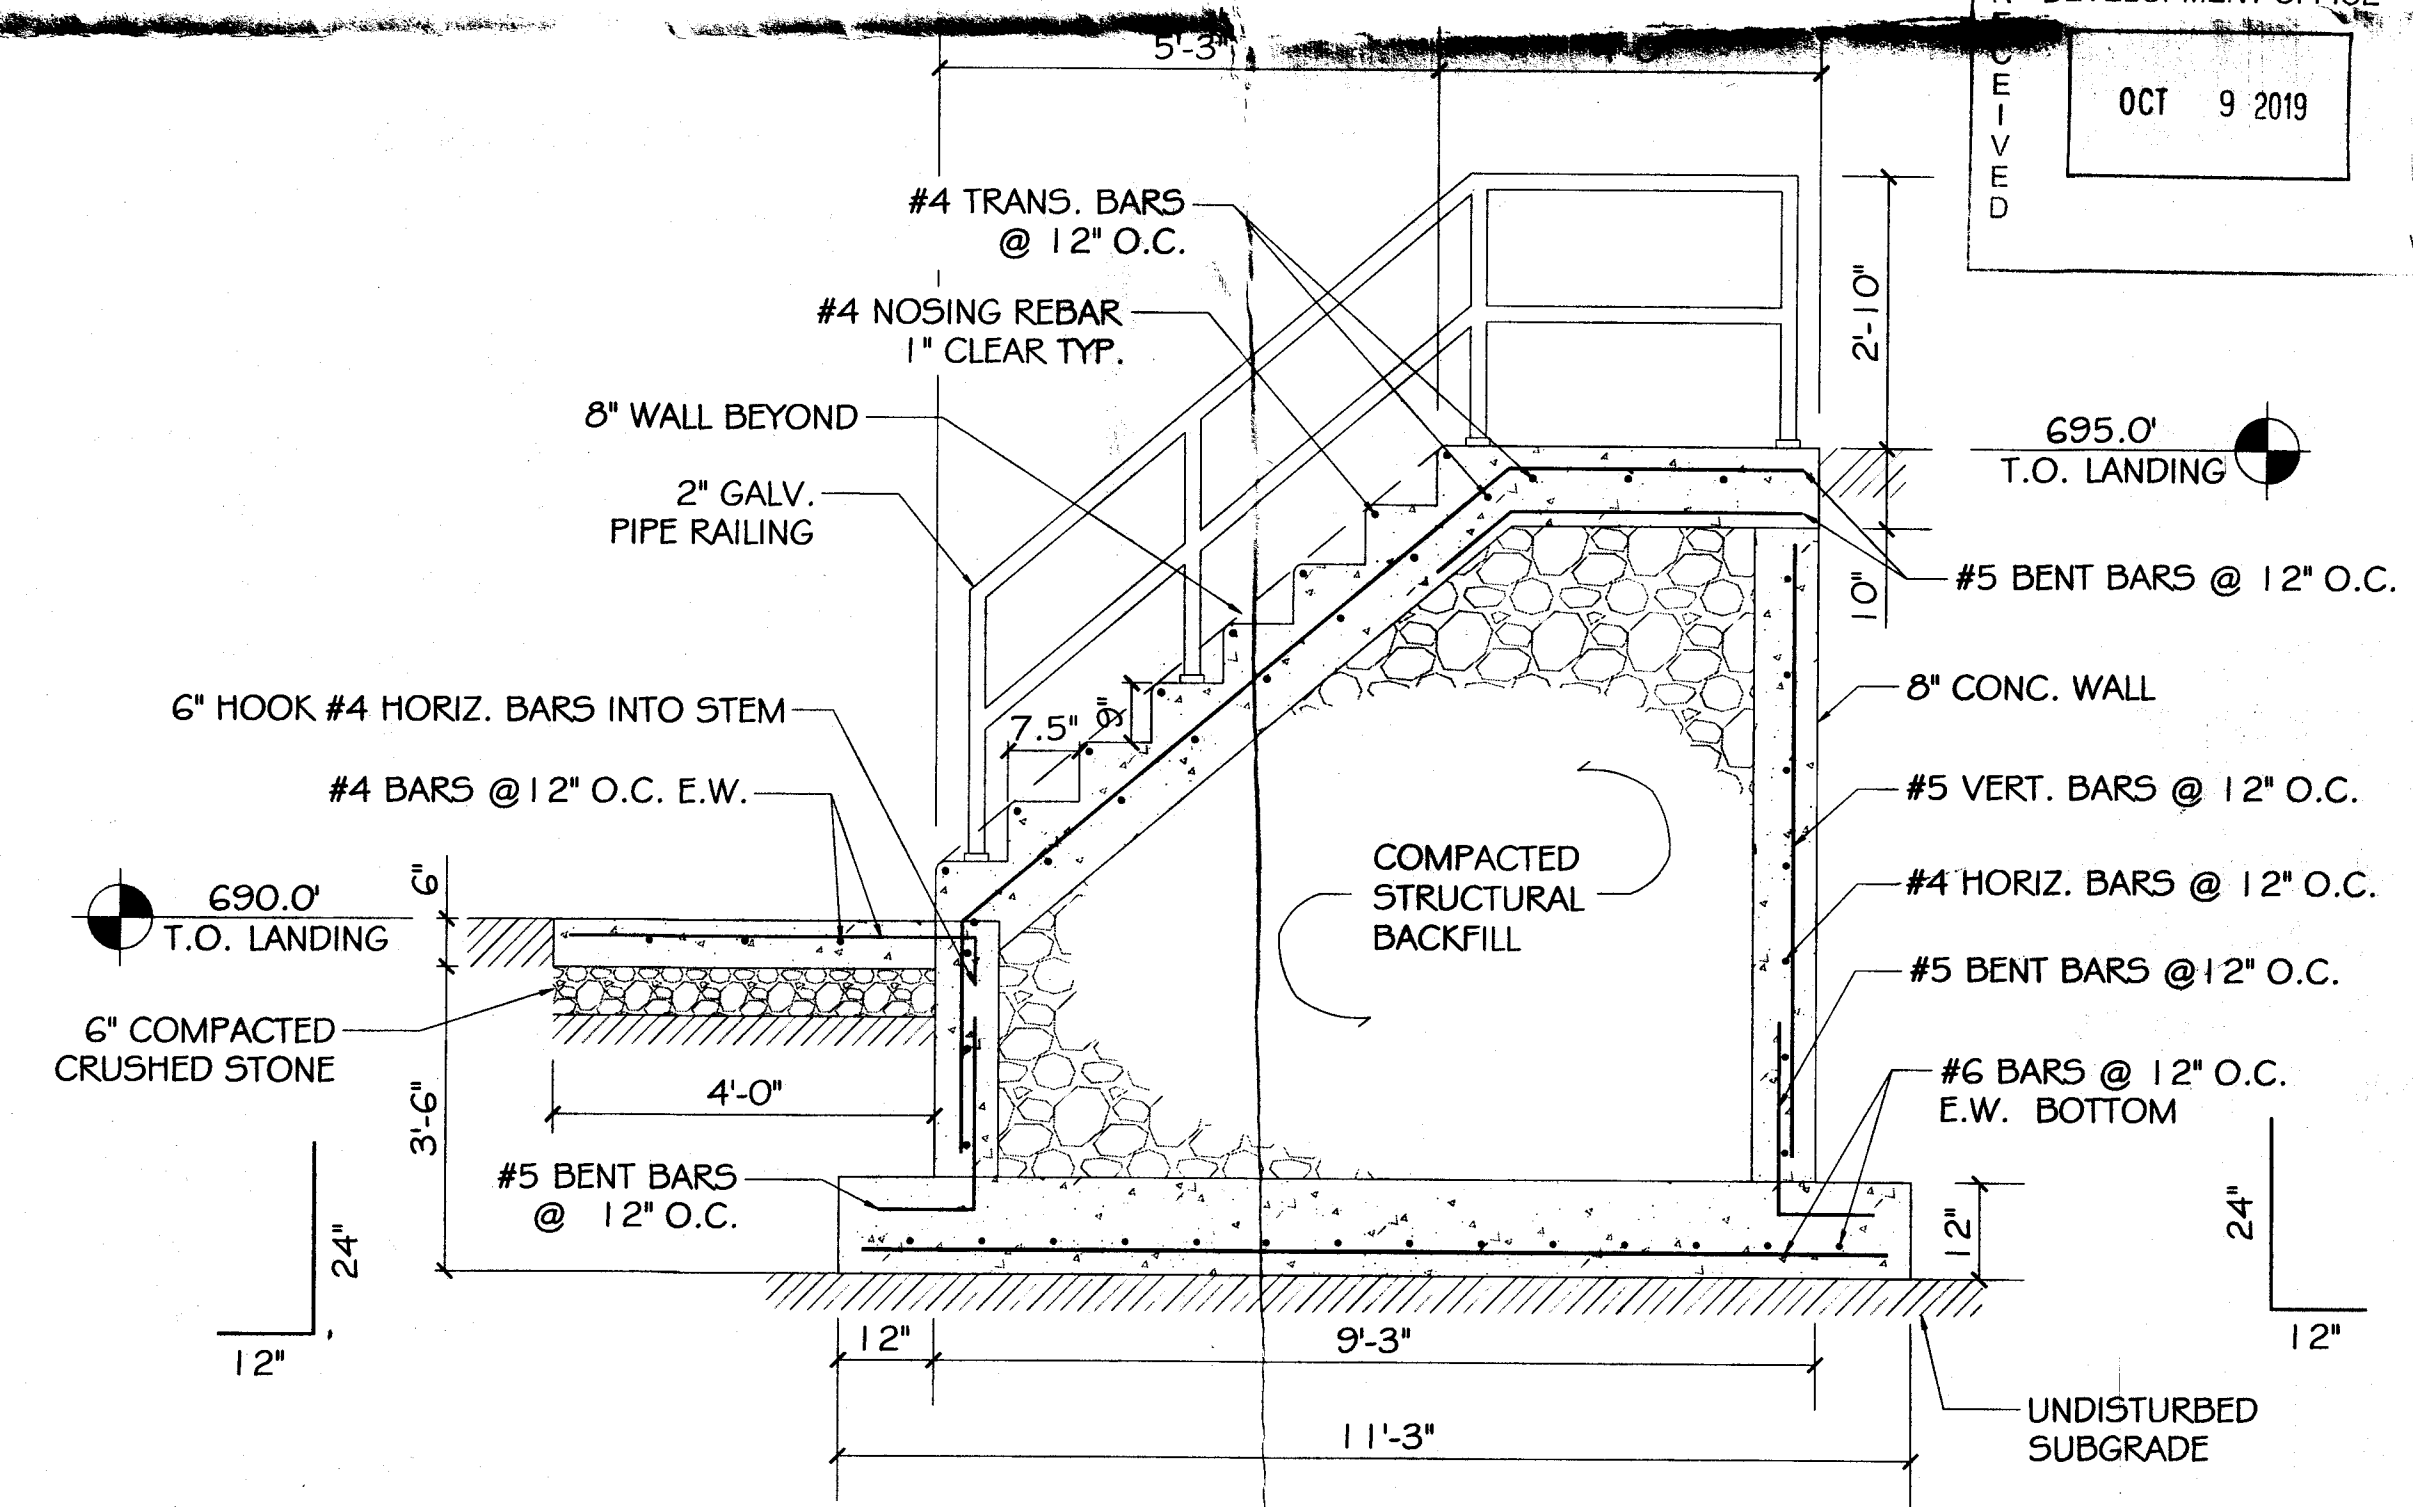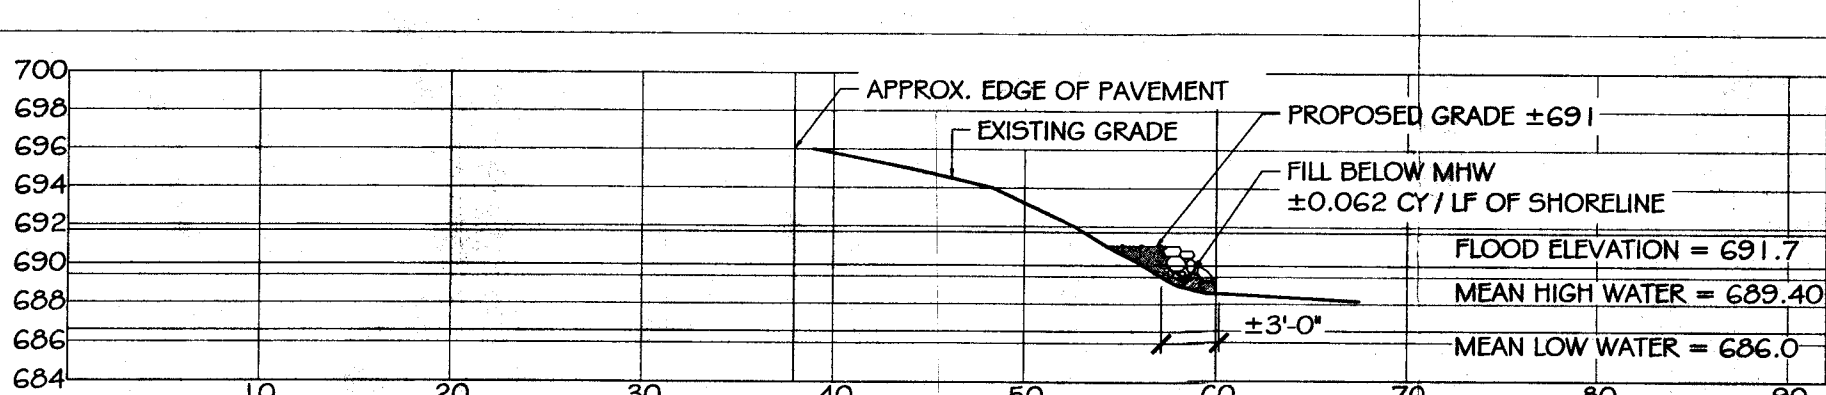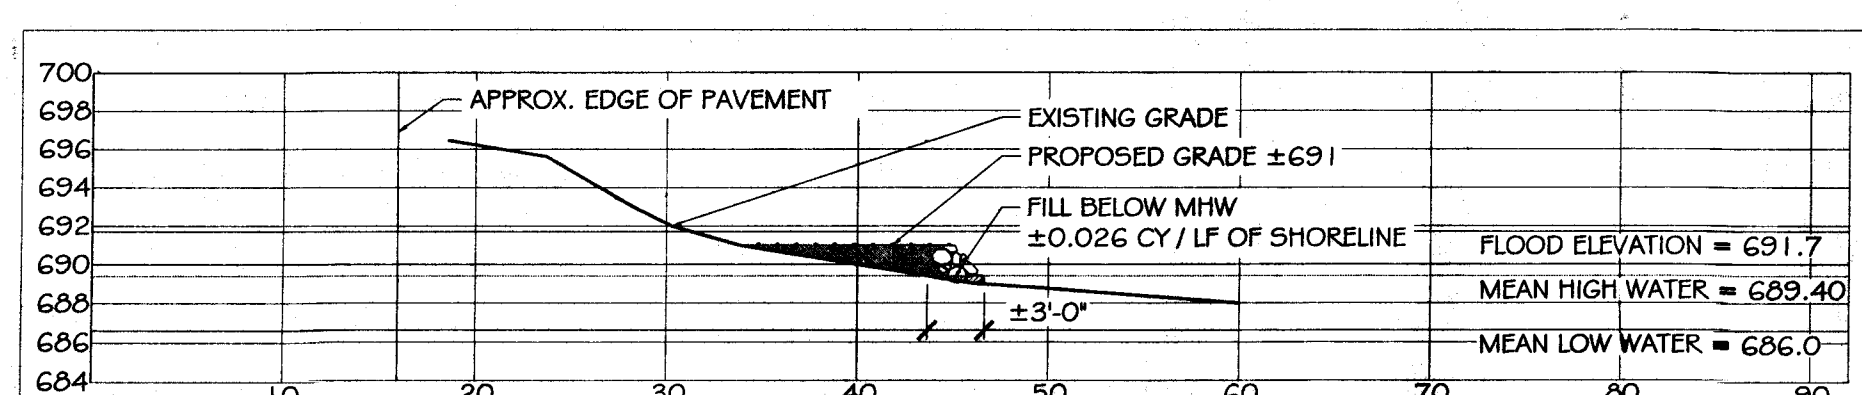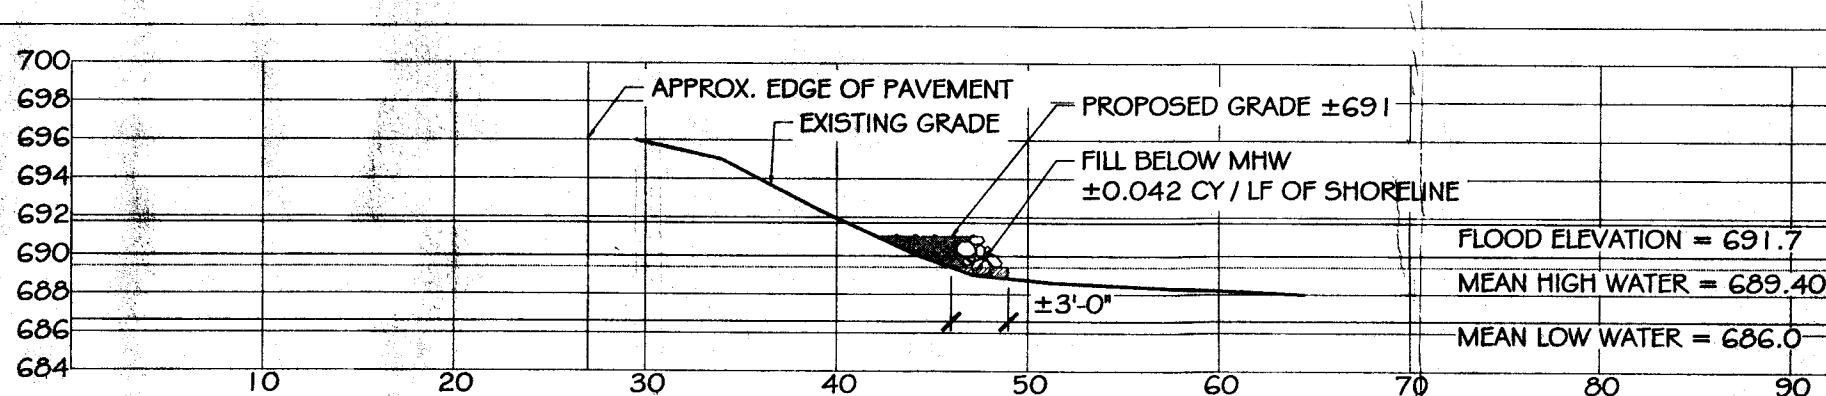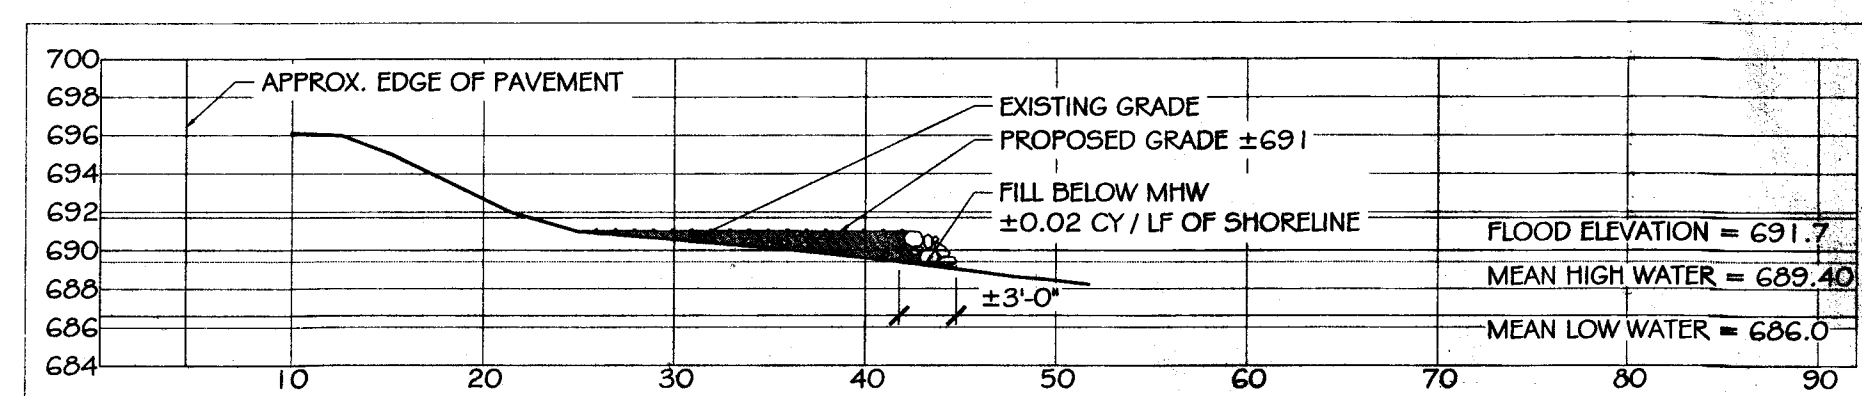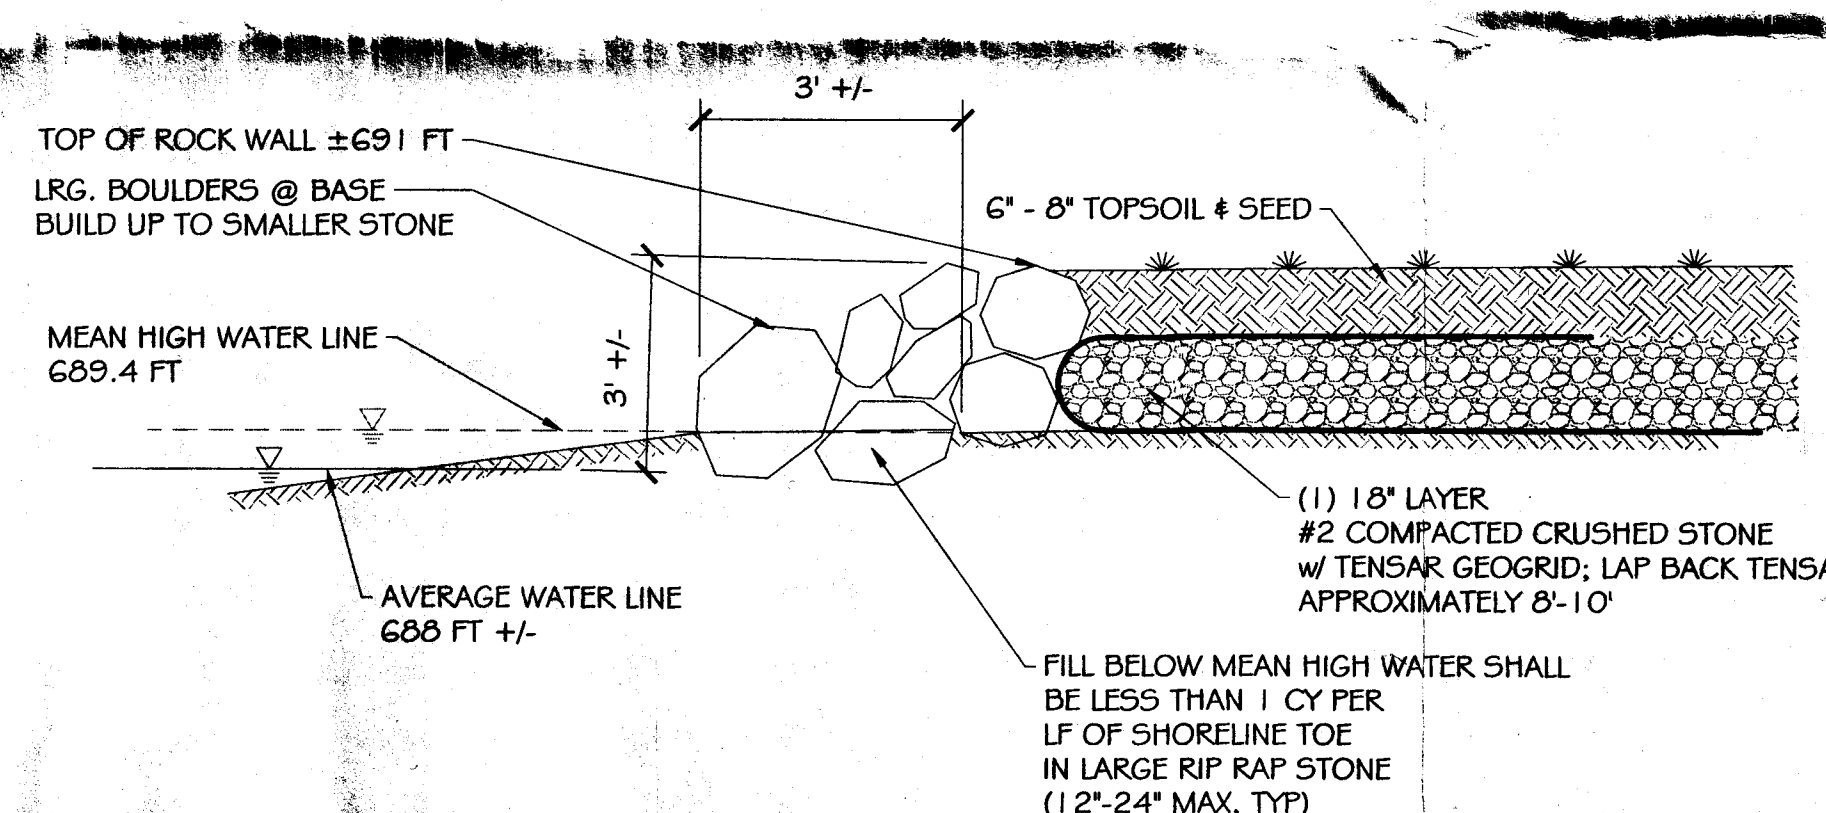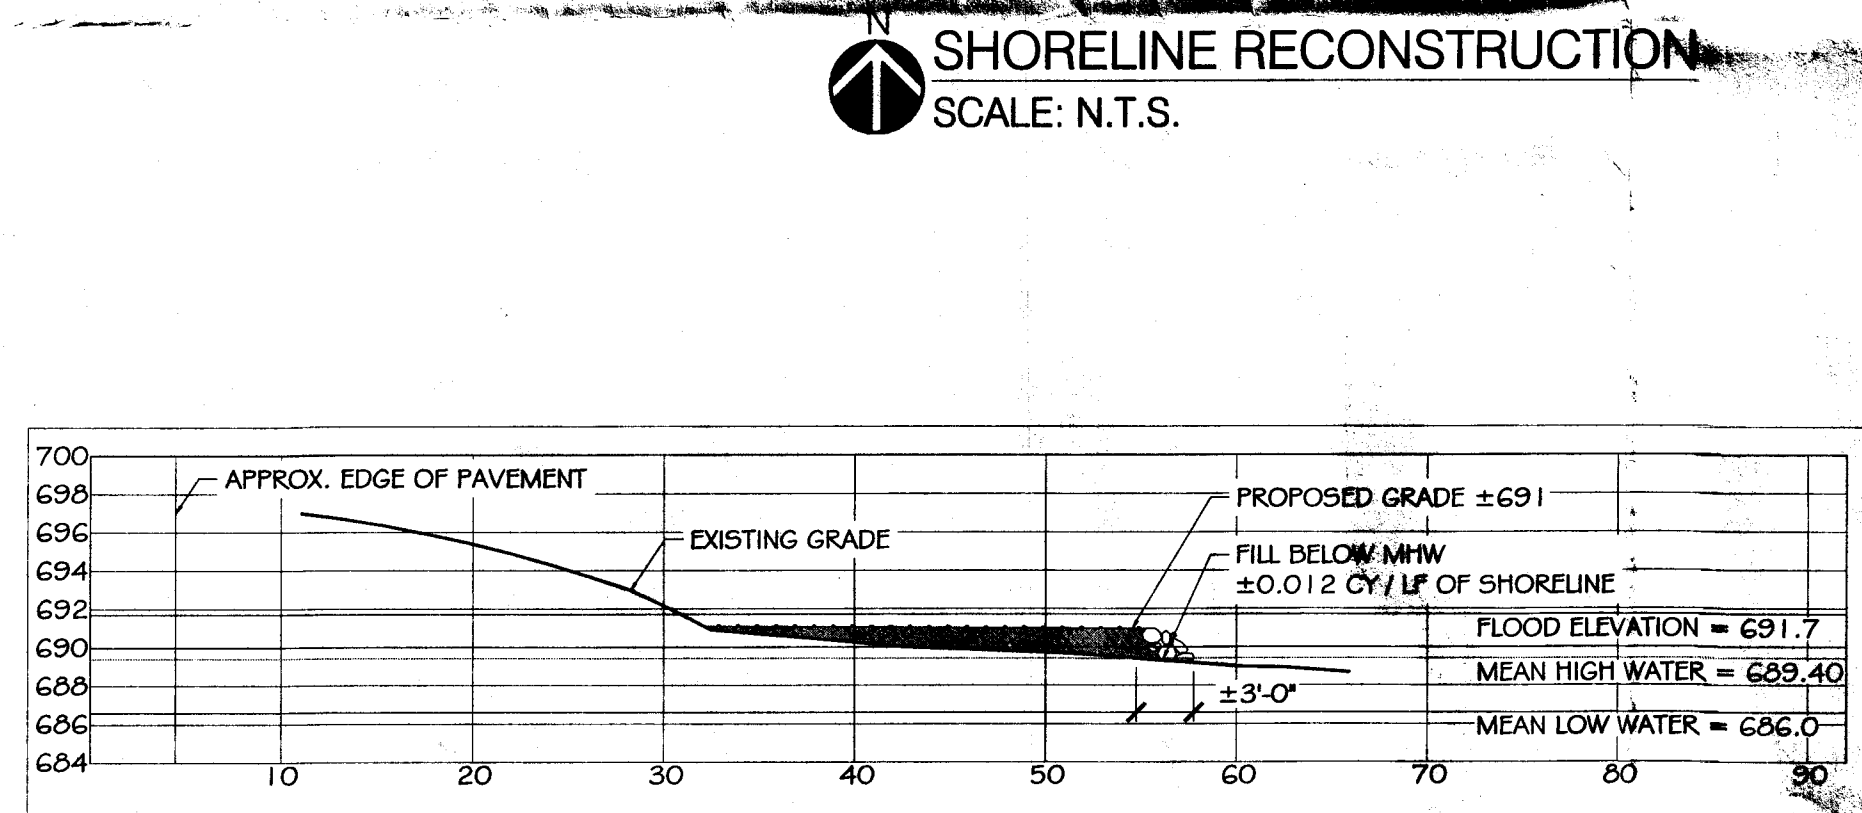

PLANNING BOARD CHAIRPERSON
TOWN ENGINEER
DATE 10-10-19
DATE 10/5/19

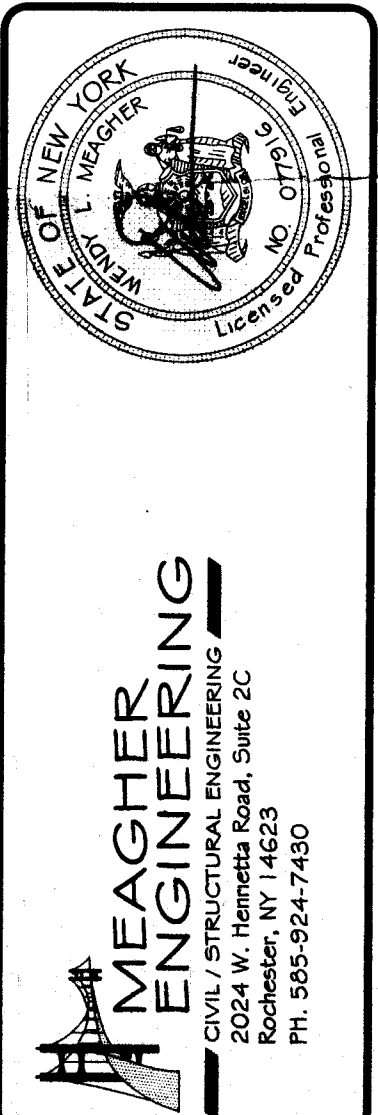

CLIENT: JOHN CASEY
3814 WEST LAKE ROAD
CANANDAIGUA, NY 14624

PROJECT: SHORELINE RECONSTRUCTION

DRAWING: SITE PLAN

DRAWING NO. C-1
1 of 1