


PLAN VIEW
SCALE 1:30



EXISTING CONDITIONS

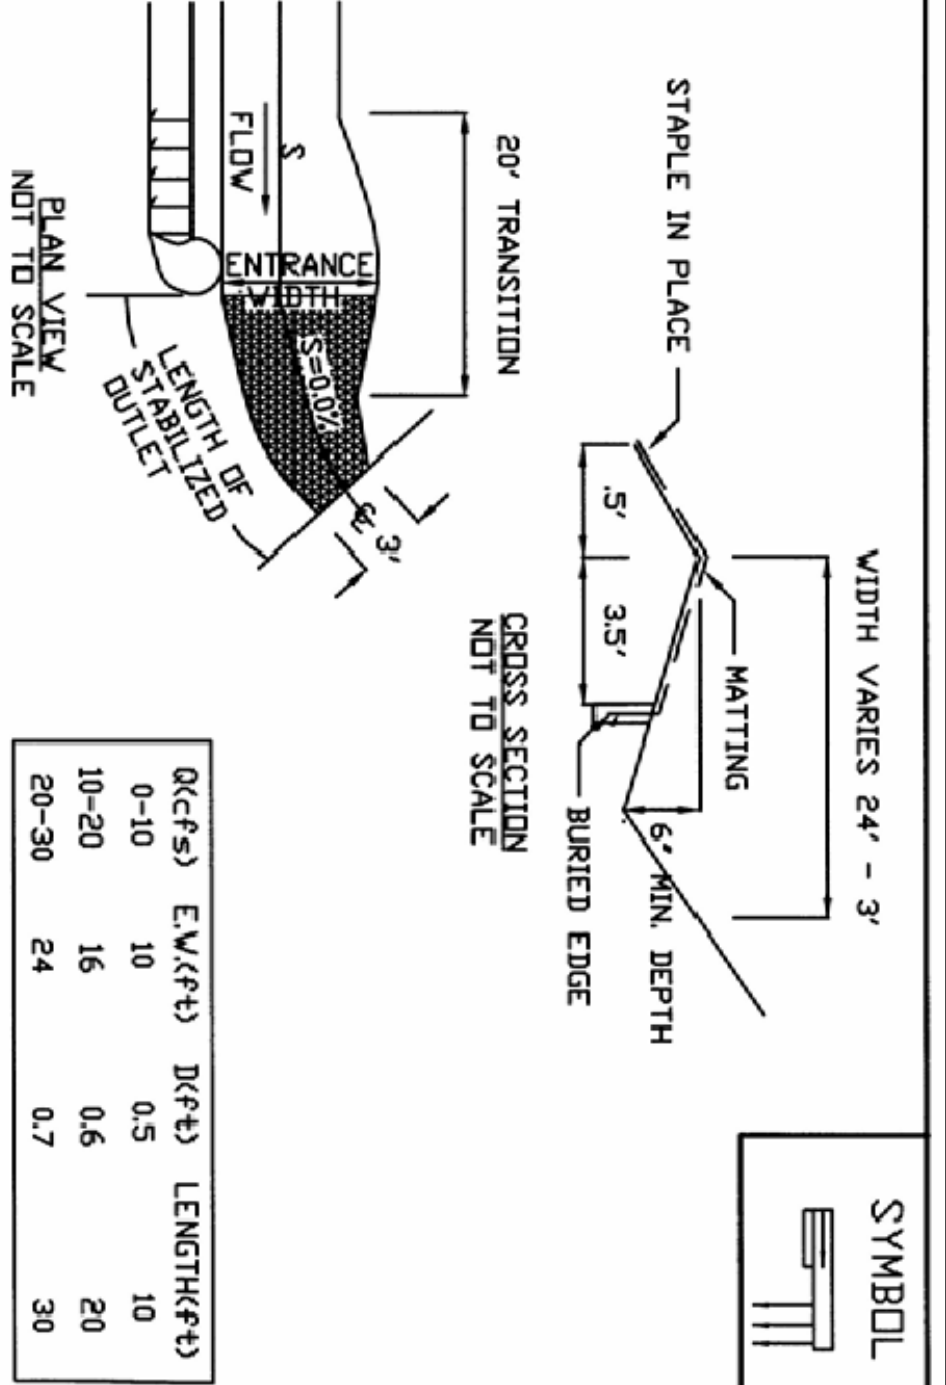

CONSTRUCTION SPECIFICATIONS			
1. THE MATTING SHOULD BE A MINIMUM OF 4 FT. WIDE EXTENDING 6 INCHES OVER THE LIP AND BURIED 6 INCHES DEEP IN A VERTICAL TRENCH ON THE LOWER EDGE. THE UPPER EDGE SHOULD BUTT AGAINST SMOOTHLY CUT SOD AND BE SECURELY HELD IN PLACE WITH CLOSELY SPACED HEAVY DUTY WIRE STAPLES AT LEAST 12 INCHES IN LENGTH.			
2. ENSURE THAT THE LIP IS LEVEL TO UNIFORMLY SPREAD DISCHARGE.			
3. THE LIP SHALL BE CONSTRUCTED ON UNDISTURBED SOIL NOT FILL.			
4. A 20 FOOT TRANSITION SECTION WILL BE CONSTRUCTED FROM THE DIVERSION CHANNEL TO THE SPREADER TO SMOOTHLY BLEND THE DIFFERENT DIMENSION AND GRADES.			
5. THE RUNOFF DISCHARGE WILL BE DUTLETED ONTO A STABILIZED VEGETATED SLOPE NOT EXCEEDING 10%.			
6. SEED AND MULCH THE DISTURBED AREA IMMEDIATELY AFTER CONSTRUCTION.			
ADAPTED FROM DETAILS PROVIDED BY USDA - NRCS, NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION, NEW YORK STATE SOIL & WATER CONSERVATION COMMITTEE		LEVEL SPREADER	



8677 STATE ROUTE 53
NABLES, NEW YORK 14512
585-531-4084 FAX
grove.engineering@yahoo.com

SITE PLAN FOR
PROPOSED
HOUSE

MINK
PROPERTY
(LOT 2)

4788 COUNTY RD 16
(WEST LAKE ROAD)
TM# 140.14-1-14.217

TOWN OF
CANANDAIGUA
COUNTY
MAY 10, 2018
SHEET 2 OF 3

REVISIONS		
NO.	DATE	DESCRIPTION
1	5/7/18	PER PRC MEETING

WILLIAM J GROVE, PE
NYS LICENSE #084111

