

RENCE: SURVEY OF PARSONS PROPERTY, BY KYLE MOTT, LS, DATED 21, 2021

DATE PLANNING BOARD CHAIRPERSON

B677 STATE ROUTE 53
NAPLES, NEW YORK 14512
585-797-3989 PHONE
585-531-4084 FAX
grove.engineering@ydhoo.com ENGINEERING CANANDAIGUA HIGHWAY & WATER SUPERINTENDENT

EXISTING SLOPE OVER 15%
LIMIT OF DISTURBANCE
PROPOSED ELECTRIC SERVICE
- PROPOSED WATER SERVICE

APPROVAL

PLAN

SITE

VISION DESCRIPT RE



SITE PLAN & CONVENTIONAL SEPTIC SYSTEM DESIGN PROPOSED PARSONS RESIDENCE NOTT ROAD

SHEET 112.01-1-6.200 OF CANANDAIGUA ARIO COUNTY, NY . #WL ZMOL

OCTOBER

ONTARIO 5, 2021

# GENERAL SITE PLAN NOTES:

- 1. THE PROPOSED USE OF THE PROPERTY IS A SINGLE FAMILY RESIDENCE.
- 2. THIS PROPERTY ZONED: AR-2 AGRICULTURAL/RURAL RESIDENTIAL DISTRICT.
- 3. TOTAL AREA DISTURBED BY THE PROJECT IS APPROXIMATELY 26,000 SQUARE FEET (0.59 ACRES), RELATED TO INSTALLING A DRIVEWAY, CONSTRUCTING THE PROPOSED RESIDENCE, SEPTIC SYSTEM, AND RELATED UTILITIES.
- 4. CONSTRUCTION IS ANTICIPATED TO COMMENCE IN DECEMBER 2021.
- 5. THE VEGETATION ON THE LOT CURRENTLY CONSISTS OF OPEN LAWN AREA. THERE ARE NO MATURE TREES THAT WILL BE DISTURBED BY THE PROJECT.
- 6. DRAINAGE RUNOFF PRODUCED BY THE PROPOSED SITE IMPROVEMENTS SHALL NOT BE DIRECTED TOWARDS NEIGHBORING PROPERTIES AND/OR BUILDING FOUNDATIONS.
- 7. IF REQUIRED, THE CONTRACTOR SHALL PROVIDE TEMPORARY EROSION CONTROL MEASURES, AT THE EXPENSE OF THE CONTRACTOR OR OWNER, TO PREVENT SILTATION OF DOWNSTREAM PROPERTIES.
- 8. IN THE EVENT THERE IS A FAILURE OF AN EROSION CONTROL DEVICE, THE CONTRACTOR AND OWNER ARE RESPONSIBLE TO RESTORE DOWNSTREAM AREAS AT THEIR EXPENSE.
- 9. THE PROPOSED BUILDING PLANS HAVE BEEN DEVELOPED BY MATT GULLACE.
- 10. THE PROPOSED DRIVEWAY TO THE HOUSE WILL BE 12' WIDE AND WILL FACILITATE EMERGENCY VEHICLE ACCESS TO THE HOUSE.
- 11. PEDESTRIAN ACCESS IS NOT REQUIRED.
- 12. THERE IS NO OUTDOOR STORAGE PROPOSED ON THE LOT.
- 13. THERE IS NO PROPOSED FENCING.
- 14. THERE ARE NO OTHER PROPOSED SITE IMPROVEMENTS (RETAINING WALLS, CULVERTS, STORAGE TANKS, ETC.)
- 15. SEWAGE DISPOSAL WILL BE ACHIEVED BY A CONVENTIONAL SEPTIC SYSTÉM, TO BE APPROVED BY THÉ CANÁNDAIGUA LAKE WATERSHED INSPECTOR.
- 16. STORMWATER WILL SHEET FLOW AROUND THE PROPOSED HOUSE. GUTTERS AND DOWNSPOUTS WILL BE DIRECTED TO SPLASH BLOCKS OR PIPED TO DAYLIGHT AT THE LOCATION SPECIFIED ON THE PLAN.
- 17. THE PROPOSED WATER SERVICE TO THE HOUSE WILL BE ACHIEVED BY THE TOWN OF CANANDAIGUA WATER CONNECTION, AND THE FOLLOWING SHALL BE REQUIRED:
- 17.1. PROPERTY OWNER WILL NEED TO SUBMIT A PAID APPLICATION FOR WATER SERVICE TO THE TOWN
- 17.2. PROPERTY OWNER TO FOLLOW THE STANDARDS OF WATER SERVICE MATERIALS PER THE TOWN OF CANANDAIGUA SPECIFICATION
- 17.3. A PRESSURE REDUCING VALVE IS MANDATORY AFTER THE WATER METER AND MAINTAINED BY THE PROPERTY OWNER
- 17.4. WATER SERVICE MATERIALS:
- 17.4.1. CORPORATION STOP SHALL BE CAST BRASS WITH "O" RING SEALS, MUELLER H-15008 (3/4", 2").
- 17.4.2. CURB STOPS SHALL HAVE CAST BRASS BODIES WITH "O" RING SEALS, COMPRESSION TYPE, MUELLER H—15209 (3/4", 2").
- 17.4.3. CURB BOXES SHALL BE TWO (2) PIECE BOXES WITH A SLIDE TYPE EXTENSION, A CAST IRON ARCH PATTERN LOWER SECTION, A ONE (1) PIECE CAST IRON LID AND A STAINLESS STEEL STATIONARY SHUT—OFF ROD, MUELLER H—10314 (3/4"), H—10310 (2").
- 17.4.4. WATER SERVICE PIPE SHALL BE TYPE "K" COPPER, MINIMUM 200 PSI WORKING PRESSURE, ALL ACCORDING TO ASTM B-88
- 17.4.5. PLASTIC PIPE SHALL BE COPPER TUBE SIZE (CTS) POLYETHYLENE ASTM D-2737, PE4710 HDPE PER AWWA C-901 ON A MINIMUM BASIS OF 200 PSI (ONLY USED FROM CURB BOX TO UNIT AND A #10 GAUGE COPPER TRACER WIRE SHALL BE INCLUDED FROM THE CURB BOX TO THE STRUCTURE)
- 18. THE DRIVEWAY WILL BE WIDE ENOUGH TO ACCOMMODATE EMERGENCY VEHICLES. THERE IS A FIRE HYDRANT DIRECTLY ACROSS THE STREET FROM THE PROPERTY ON NOTT ROAD.
- 19. THE PROPOSED ELECTRIC SERVICE LINES WILL COME FROM THE EXISTING UTILITY POLE LOCATED SOUTH OF THE PROPOSED HOUSE. FINAL ELECTRIC SERVICE LOCATION TBD BY UTILITY COMPANY.
- 20. THERE ARE NO PROPOSED SIGNS ON THE PROJECT.
- 21. THERE ARE NO EXISTING OR PROPOSED BUFFERS ON THE PROJECT.
- 22. THE LANDSCAPING PLAN CONSISTS OF RESTORING ALL DISTURBED AREAS TO MOWABLE LAWN AND INSTALLING A LANDSCAPED FLOWER BEDS.
- 23. THE DRIVEWAY IS TO BE GRAVEL.
- 24. THE PROJECT AREA LIES WITHIN ZONE X, AS IDENTIFIED ON FLOOD INSURANCE RATE MAP #360598, PANEL #0005.
- 25. ALL SITE LIGHTING IS TO COMPLY WITH THE LIGHTING STANDARDS CONTAINED IN SECTION 220-77 OF THE TOWN CODE. ALL EXTERIOR LIGHTING IS TO BE DARK SKY COMPLIANT.
- 26. ALL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE DESIGNED, INSTALLED AND MAINTAINED PER THE REQUIREMENTS SET FORTH IN THE LATEST EDITION (2016) OF THE NEW YORK STATE STANDARDS AND SPECIFICATIONS FOR EROSION AND SEDIMENT CONTROL.
- 27. NO PHOSPHOROUS SHALL BE USED AT PLANTING TIME UNLESS SOIL TESTING HAS BEEN COMPLETED AND TESTED BY A HORTICULTURAL TESTING LAB AND THE SOIL TESTS SPECIFICALLY INDICATE A PHOSPHOROUS DEFICIENCY THAT IS HARMFUL, OR WILL PREVENT NEW LAWNS AND PLANTINGS FROM ESTABLISHING PROPERLY.
- 28. IF SOIL TESTS INDICATE A PHOSPHOROUS DEFICIENCY THAT WILL IMPACT PLANT AND LAWN ESTABLISHMENT, PHOSPHOROUS SHALL BE APPLIED AT THE MINIMUM RECOMMENDED LEVEL PRESCRIBED IN THE SOIL TEST FOLLOWING ALL NYS DEC GUIDELINES.
- 29. MAILBOX (IF INSTALLED) SHOULD BE 16 FEET FROM THE CENTER OF THE ROAD AND A MINIMUM HEIGHT OF 46" FROM THE BOTTOM OF THE BOX.
- 30. CONCRETE TRUCK CLEANOUT SHALL FOLLOW THE EPA'S GUIDELINES FOR STORMWATER BEST MANAGEMENT PRACTICE FOR CONCRETE WASHOUT. NO WET CONCRETE SHALL BE WASHED OUT WITHIN 50' OF ANY WATERCOURSE OR WATER BODY.
- 31. THIS PROPERTY MAY BE NEAR A FARM, AS DEFINED IN THE NEW YORK STATE AGRICULTURE AND MARKETS LAW, § 301, SUBSECTION 11. SOUND FARMING PRACTICES MAY GENERATE DUST, ODOR, SMOKE, NOISE, AND VIBRATION


Warning and Disclaimer of Liability.

This Onsite Wastewater Treatment System design has been performed in compliance with all Town and State design requirements. A prudent design, however, does not necessarily imply that the system will be free from malfunction. The required soil percolation and soil depth tests may not reveal all the soil characteristics affecting operation. Further, unusual precipitation, disposal of some household and other chemicals and failure to pump out septic tanks as often as required are beyond the control and the responsibility of the designer. Therefore, in no event will this design create liability for the designer or design company.

It is a violation of the NYS Education Law for any person, unless he is acting under the direction of a licensed professional engineer or land surveyor, to after an item in any way. If an item bearing the seal of an engineer or land surveyor is altered, the altering engineer or land surveyor shall affix to the item his seal and the notation "altered by" followed by his signature and the date of such alteration, and a specific description of the alteration.

# PROPOSED CONSTRUCTION SEQUENCE:

- 1. OBTAIN PLAN APPROVAL AND OTHER APPLICABLE PERMITS
- 2. FLAG THE WORK LIMITS
- 3. INSTALL SILT FENCE BELOW ALL AREAS OF DISTURBANCE
- 4. FENCE OFF ANY AREAS THAT ARE NOT TO BE DISTURBED (SEPTIC SYSTEM)
- 5. INSTALL STABILIZED CONSTRUCTION ENTRANCE
- 6. INSTALL UTILITIES
- 7. CONSTRUCT HOUSE AND GARAGE
- 8. INSTALL PERMANENT DRIVEWAY
- 9. ROUGH GRADE LAWN AREA
- 10. FINAL GRADE
- 11. RESTORE ALL DISTURBED AREAS AS INDICATED ON THE PLAN
- 12. TOPSOIL AND SEED ALL DISTURBED AREAS IMMEDIATELY
- 13. AFTER STABILIZATION OF THE SITE AND APPROVAL FROM TOWN AND ENGINEER, REMOVE TEMPORARY MEASURES (SILT FENCE) AND INSTALL PERMANENT VEGETATION ON ALL DISTURBED AREAS



# SITE LOCATION

NOTT ROAD CANANDAIGUA, NY 14424

REVISIONS						
NO.	DATE	DESCRIPTION	BY			



GROVE

ENGINEERING

8677 STATE ROUTE 53

Naples, New York 14512 585-797-3989 Phone

585-531-4084 FAX

grove.engineering@yahoo.com

SITE PLAN & CONVENTIONAL SEPTIC SYSTEM DESIGN

PROPOSED PARSONS RESIDENCE

NOTT ROAD T.M.#112.01-1-6.200

TOWN OF
CANANDAIGUA
ONTARIO COUNTY
NEW YORK


OCTOBER 5, 2021

SHEET 2 OF 6

COPYRIGHT 2021
GROVE ENGINEERING, PLLC
ALL RIGHTS RESERVED.
UNAUTHORIZED DUPLICATION IS A
VIOLATION OF ALL APPLICABLE LAWS



WILLIAM J. GROVE, PE NYS LICENSE #084111

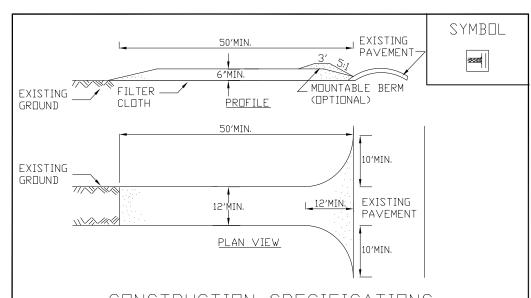


# CONSTRUCTION SPECIFICATIONS

- 1. STONE SIZE USE 2" STONE, OR RECLAIMED OR RECYCLED CONCRETE EQUIVALENT.
- 2. LENGTH NOT LESS THAN 50 FEET (EXCEPT ON A SINGLE RESIDENCE LOT WHERE A 30 FOOT MINIMUM LENGTH WOULD APPLY).
- 3. THICKNESS NOT LESS THAN SIX (6) INCHES.
- 4. WIDTH TWELVE (12) FOOT MINIMUM, BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INGRESS OR EGRESS OCCURS, TWENTY-FOUR (24) FOOT IF SINGLE ENTRANCE TO SITE.
- 5. FILTER CLOTH WILL BE PLACED OVER THE ENTIRE AREA PRIOR TO PLACING OF STONE.
- 6. SURFACE WATER ALL SURFACE WATER FLOWING OR DIVERTED TOWARD CON-STRUCTION ENTRANCES SHALL BE PIPED ACROSS THE ENTRANCE. IF PIPING IS IMPRACTICAL, A MOUNTABLE BERM WITH 5:1 SLOPES WILL BE PERMITTED.
- 7. MAINTENANCE THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY, ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACTED ONTO PUBLIC RIGHTS-OF-WAY MUST BE REMOVED IMMEDIATELY.
- 8. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON A AREA STABILIZED WITH STONE AND WHICH DRAINS INTO AN APPROVED SEDIMENT TRAPPING DEVICE.
- 9. PERIODIC INSPECTION AND NEEDED MAINTENANCE SHALL BE PROVIDED AFTER EACH

U.S. DEPARTMENT OF AGRICULTURE NATURAL RESDURCES CONSERVATION SERVICE NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION NEW YORK STATE SOIL & WATER CONSERVATION COMMITTEE

STABILIZED CONSTRUCTION **FNTRANCE** 

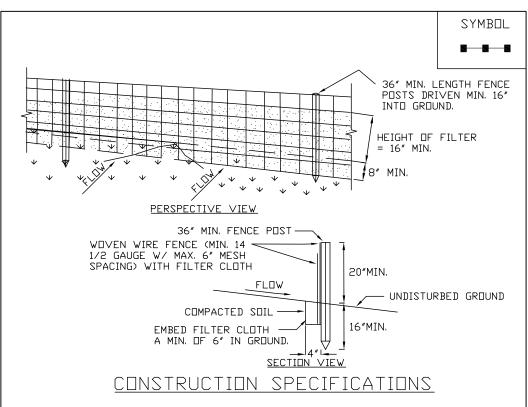

- 1. WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES, POSTS SHALL BE STEEL EITHER "T" OR "U" TYPE OR HARDWOOD.
- 2. FILTER CLOTH TO BE TO BE FASTENED SECURELY TO WOVEN WIRE FENCE WITH TIES SPACED EVERY 24" AT TOP AND MID SECTION. FENCE SHALL BE WOVEN WIRE, 12 1/2 GAUGE, 6" MAXIMUM MESH OPENING.
- 3. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVER-LAPPED BY SIX INCHES AND FOLDED. FILTER CLOTH SHALL BE EITHER FILTER X, MIRAFI 100X, STABILINKA T140N, OR APPROVED EQUIVALENT.
- 4. PREFABRICATED UNITS SHALL BE GEOFAB, ENVIROFENCE, OR APPROVED EQUIVALENT.
- 5. MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.

TYPICAL SILT FENCE DETAIL

NOT TO SCALE

## SITE DATA:

**APPLICANT**:

SITE ADDRESS: NOTT ROAD

TOWN OF CANANDAIGUA.

ONTARIO COUNTY

TAX MAP NUMBER: 112.01-1-6.200 OWNER:

DAVID PARSONS DAVID PARSONS

MAILING ADDRESS: 5446 NOTT ROAD

CANANDAIGUA. NY 14424

EXISTING ZONING: MINIMUM SETBACKS:

**MAXIMUM HEIGHT:** 

AR-2 AGRICULTURAL RURAL RESIDENTIAL

60' FRONT (99.0' PROPOSED)

40' REAR (102.7' PROPOSED) 25' SIDES (32.0' & 54.1 PROPOSED)

35' ABOVE AVERAGE GRADE (25.0' PROP.)

MAXIMUM COVERAGE: 20% (15.9% PROPOSED)

REVISIONS						
NO.	DATE	DESCRIPTION	BY			

Warning and Disclaimer of Liability. This Onsite Wastewater Treatment System design has been performed in compliance with all Town and State design requirements. A prudent design, however, does not necessarily imply that the system will be free from malfunction. The required soil percolation and soil depth tests may not reveal all the soil characteristics affecting operation. Further, unusual precipitation, disposal of some household and other chemicals and failure to pump out septic tanks as often as required are beyond the control and the responsibility of the designer. Therefore, in no event will this design create liability for the designer or design company.

GROVE

ENGINEERING

8677 STATE ROUTE 53

SITE PLAN & CONVENTIONAL SEPTIC SYSTEM DESIGN

PROPOSED PARSONS RESIDENCE

NOTT ROAD T.M.#112.01-1-6.200

TOWN OF CANANDAIGUA ONTARIO COUNTY NEW YORK

OCTOBER 5, 2021

SHEET 3 OF 6

80° 9 0000 00 0 200000/ 6-8" COMPACTED AGGREGATE <del>--</del>0 00 00 SUBBASE MATERIAL, NYSDOT 0 0\_0 0 000 0 000 00 TYPE 2, ITEM 304.03 OR SIMILAR STABILIZATION GEOTEXTILE MIRAFI 500X or approved equal

TYPICAL DRIVEWAY SECTION

NOT TO SCALE

COMPACTED SUBGRADE

# SITE PLAN APPROVAL

PLANNING BOARD CHAIRPERSON

DATE DATE

CANANDAIGUA HIGHWAY & WATER SUPERINTENDENT

It is a violation of the NYS Education Law for any person, unless he is acting under the direction of a licensed professional engineer or land surveyor, to alter an item in any way. If an item bearing the seal of an engineer or land surveyor is altered, the altering engineer or land surveyor shall affix to the item his seal and the notation "altered by" followed by his signature and the date of such alteration, and a specific description of the alteration



WILLIAM J. GROVE, PE NYS LICENSE #084111

NAPLES, NEW YORK 14512 585-797-3989 PHONE 585-531-4084 FAX grove.engineering@yahoo.com

#### GENERAL SEPTIC NOTES:

- SITE INVESTIGATION CONSISTING OF ONE (1) DEEP TEST PIT AND TWO (2) PERCOLATION (PERC) TESTS, WAS PERFORMED ON OCTOBER 6, 2020 BY WILLIAM J. GROVE, PE. SEE "SOILS INFORMATION" FOR SUMMARIZED SITE INVESTIGATION RESULTS. BASED ON THE RESULTS OF THE SITE INVESTIGATION. A CONVENTIONAL SEPTIC SYSTEM IS PROPOSED.
- LOCATIONS OF THE SYSTEM COMPONENTS ARE SHOWN IN THE PLAN VIEW AND COMPONENT DETAILS ARE SHOWN SEPARATELY.
- THE SEPTIC SYSTEM IS DESIGNED TO TREAT AND DISPERSE 520 GALLONS PER DAY BASED ON THE PROPOSED 4 BEDROOM RESIDENCE, THE PROPOSED USE AND THE DOH REGULATIONS.
- WATER SUPPLY IS SERVICED BY THE TOWN OF CANANDAIGUA WATER SERVICE. LOCATED AS SHOWN ON PLAN.
- THE BACKFILL IS TO BE GRADED TO ROUTE SURFACE WATER AWAY FROM THE ABSORPTION FIELD.
- WATER TREATMENT SYSTEM WASTES (SUCH AS FROM A WATER SOFTENER) ARE TO BE EXCLUDED FROM THE SYSTEM.
- NO "CLEAN" WATER IS TO ENTER THE SYSTEM VIA ROOF DRAINS, SUMP PUMPS, FOOTING DRAINS, ETC. THE SYSTEM IS A DISPOSAL UNIT FOR COMMON BATHROOM, LAUNDRY AND KITCHEN WASTES ONLY. GARBAGE GRINDERS ARE NOT TO BE USED ON THIS SYSTEM.
- IF THE HOUSE USES A WATER SOFTENER, THE WATER SOFTENER DISCHARGE SHALL NOT BE ROUTED TO THE WASTEWATER SYSTEM. THE WATER SOFTENER DISCHARGE SHOULD BE DIRECTED TO ITS OWN SUBSURFACE DISPOSAL SYSTEM LOCATED AWAY FROM THE PROPOSED LEACH AREA.
- THE CONTRACTOR IS TO CONTACT DIG SAFELY NEW YORK AT 800-962-7962 TO VERIFY THE LOCATIONS OF ALL UNDERGROUND UTILITIES PRIOR TO DOING ANY EXCAVATION WORK.
- NO PART OF THE SYSTEM IS TO BE LOCATED UNDER DRIVEWAYS, BUILDINGS, SWIMMING POOLS OR OTHER AREAS SUBJECT TO HEAVY LOADING.
- 11. TRENCH DEPTH SHALL BE ±14". TRENCHES SHALL BE EXCAVATED TO DESIGN DEPTH WITH BOTTOMS PRACTICALLY LEVEL
- 12. FOLLOWING EXCAVATION, THE TRENCH BOTTOMS SHOULD BE GRADED BY HAND.
- TRENCH BOTTOMS AND SIDES SHALL BE IMMEDIATELY RAKED AFTER FINAL GRADING.
- INFILTRATOR QUICK 4 PLUS EQ-36 LOW PROFILE GRAVELLESS DISTRIBUTOR CHAMBERS SHALL BE INSTALLED IN THE TRENCHES AT A SLOPE OF 1/32" PER FOOT.
- 15. TRENCHES SHALL BE BACKFILLED WITH THE NATIVE SOIL EXCAVATED FROM THE TRENCHES.
- TRENCHES SHALL BE COVERED WITH 6" TOPSOIL, SEEDED AND MULCHED AND MAINTAINED AS LAWN.
- THE EARTH BACKFILL IS TO BE MOUNDED SLIGHTLY ABOVE THE ORIGINAL GROUND LEVEL (i.e., NOT COMPACTED) TO ALLOW FOR SETTLING. FOLLOWING SETTLEMENT, THE ENTIRE AREA SHOULD BE GRADED WITHOUT THE USE OF HEAVY EQUIPMENT AND SEEDED WITH GRASS. HEAVY EQUIPMENT SHALL NOT ENTER THE ABSORPTION FACILITY AREA OR THE PROPOSED EXPANSION AREA AFTER THE SUBSURFACE SEWAGE TREATMENT SYSTEM HAS BEEN CONSTRUCTED.
- 18. HEAVY CONSTRUCTION EQUIPMENT MUST NOT BE ALLOWED WITHIN THE AREA OF THE SYSTEM PRIOR TO CONSTRUCTION
- 19. THE TOPSOIL SURFACE SHALL BE GRADED TO ENHANCE RUNOFF OF PRECIPITATION.
- ON SLOPED SITES, A DIVERSION DITCH OR CURTAIN DRAIN SHALL BE CONSTRUCTED UPHILL FROM THE FILL TO PREVENT SURFACE RUNOFF FROM ENTERING THE FILL.
- 21. DISTANCE BETWEEN TRENCHES TO BE 4 FEET MINIMUM EDGE-TO-EDGE (TYPICALLY 6' CENTER-TO-CENTER)
- THE CONTRACTOR SHALL PROVIDE AN ACCURATE AS-BUILT MAP TO THE OWNER REFERENCING ALL SYSTEM COMPONENTS TO PERMANENT SITE FEATURES FOR LATER RECOVERY.
- AFTER AN ENVIRONMENTAL ASSESSMENT. THE ENGINEER HAS DETERMINED THAT THE DEVELOPMENT OF THE SITE WITH THE PROPOSED SYSTEM IS CONSISTENT WITH THE OVERALL DEVELOPMENT OF THE AREA AND WILL CAUSE NO ADVERSE ENVIRONMENTAL IMPACTS.
- 24. THE PROPOSED ONSITE WASTEWATER TREATMENT SYSTEM MUST BE DESIGNED AND THE INSTALLATION SUPERVISED AND CERTIFIED BY A DESIGN PROFESSIONAL.
- 25. IT IS THE RESPONSIBILITY OF THE OWNER AND/OR CONTRACTOR TO CONTACT THE LOCAL CODE ENFORCEMENT OFFICER ABOUT ANY REQUIRED PERMITS OR FEES BEFORE STARTING WORK ON THE SYSTEM INSTALLATION.

ROVE ENGINEERING, PI ALL RIGHTS RESERVED JTHORIZED DUPLICATIO

Warning and Disclaimer of Liability.

This Onsite Wastewater Treatment System design has been performed in compliance with all Town and State design requirements. A prudent design, however, does not necessarily imply that the system will be free from malfunction. The required soil percolation and soil depth tests may not reveal all the soil characteristics affecting operation. Further, unusual precipitation, disposal of some household and other chemicals and failure to pump out septic tanks as often as required are beyond the control and the responsibility of the designer. Therefore, in no event will this design create liability for the designer or design company.

It is a violation of the NYS Education Law for any person, unless he is acting under the direction of a licensed professional engineer or land surveyor, to after an item in any way. If an item bearing the seal of an engineer or land surveyor is altered, the altering engineer or land surveyor shall affix to the item his seal and the notation "altered by" followed by his signature and the date of such alteration, and a specific description of the alteration.

## **DESIGN CALCULATIONS:**

DESIGN FLOW

SEPTIC TANK:

PROPOSED 4 BEDROOM HOME @ 130 GALLONS PER DAY (GPD)/BEDROOM = 520 GPD TOTAL

1250 GALLON DUAL COMPARTMENT WITH

EFFLUENT FILTER

DESIGN PERC. RATE:

1-5 MINUTES/INCH

REQUIRED LENGTH OF ABSORPTION TRENCH

216 FEET REQUIRED 240 FEET PROPOSED

FOUR (4) 60 FOOT LONG TRENCHES ARE PROPOSED TOTAL 240 FEET.

TRENCHES TO BE SPACED AT 6 FT ON CENTER

CALCULATION REFERENCE BASED ON N.Y.S.D.O.H., "INDIVIDUAL RESIDENTIAL WASTEWATER TREATMENT SYSTEMS - DESIGN HANDBOOK", 2012, AND APPENDIX 75-A

### PERCOLATION TEST RESULTS:

TESTS PERFORMED ON OCTOBER 6, 2020

TEST NUMBER **DEPTH** 24" 24" PT -2

PERC RATES (MIN/INCH) 2, 2, 2, 2 2, 2.5, 2.5, 2.5

STABILIZED PERC RATE 2 MIN/INCH 2.5 MIN/INCH

### SOILS INFORMATION:

DH - 1

0" - 8" DARK BROWN LOAMY TOPSOIL

8" - 32" LIGHT BROWN SANDY LOAM WITH

LIGHT BROWN SILTY LOAM

ROOTS TO 46'

### KEY:

PERC TEST LOCATION

DEEP HOLE LOCATION DH-1

CLEAN-OUT

REVISIONS						
NO.	DATE	DESCRIPTION	BY			


## SITE PLAN APPROVAL

PLANNING BOARD CHAIRPERSON

DATE

DATE

CANANDAIGUA HICHWAY & WATER SUPERINTENDENT



WILLIAM J. GROVE, PE NYS LICENSE #084111



8677 STATE ROUTE 53 NAPLES, NEW YORK 14512 585-797-3989 PHONE 585-531-4084 FAX grove.engineering@yahoo.com

SITE PLAN & CONVENTIONAL SEPTIC SYSTEM DESIGN


PROPOSED PARSONS RESIDENCE

NOTT ROAD T.M.#112.01-1-6.200

TOWN OF CANANDAIGUA ONTARIO COUNTY NEW YORK


OCTOBER 5, 2021

SHEET 4 OF 6




#### TOP VIEW

SECTION VIEW

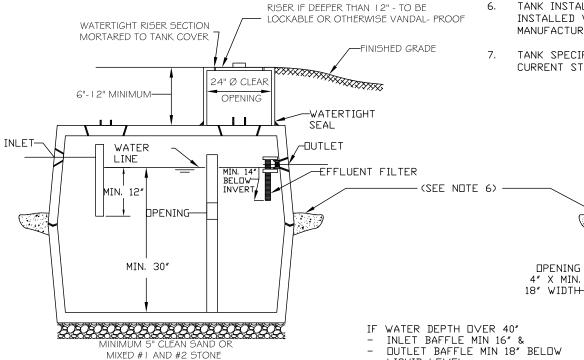

#### SEPTIC TANK NOTES:

- . ALL PIPE CONNECTION SHALL BE WATERTIGHT.
- PAFFLES SHALL BE PROVIDED AT INLET AND DUTLET OF SEPTIC TANK (WITH DUTLET FILTER)
- 3. A 2" MINIMUM DROP FROM INLET TO DUTLET
- 4. SEPTIC TANK SHALL BE PRECAST CONCRETE WITH WIRE MESH REINFORCING, OR POLYETHYLENE MINIMUM AS SHOWN ON THE SITE PLAN, DUAL-CHAMBER REQUIRED.
- 5. INSPECTION PORTS TO BE OF ADEQUATE DIAMETER, ONE TO BE LOCATED OVER BAFFLE TO ACCESS FILTER/BAFFLE.
- 6. TANK INSTALLATION IN AREA OF HIGH GROUNDWATER SHALL BE INSTALLED WITH ANTI-FLOATING DEVICE AS PER TANK MANUFACTURER.
- 7. TANK SPECIFICATIONS SHALL CONFORM TO NYS APPENDIX 75- A OR CURRENT STANDARDS.




END VIEW


SEPTIC TANK

LIQUID LEVEL

NOT TO SCALE




It is a violation of the NYS Education Law for any person, unless he is acting under the direction of a licensed professional engineer or land surveyor, to alter an item in any way. If an item bearing the seal of an engineer or land surveyor is altered, the altering engineer or land surveyor shall affix to the item his seal and the notation "altered by" followed by his signature and the date of such alteration, and a specific description of the alteration.

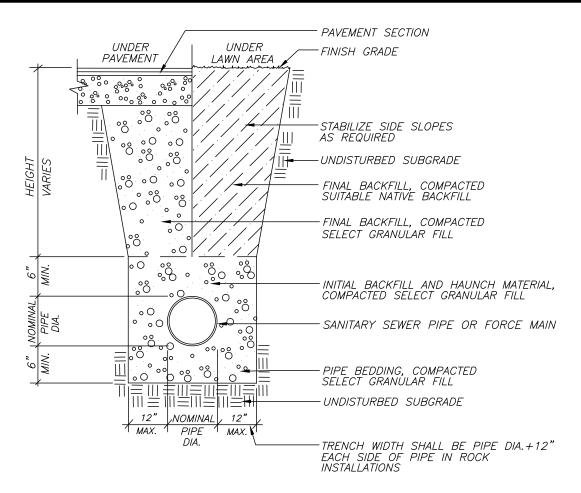


# SANITARY SEWER PIPE TRENCH

NOT TO SCALE



COPYRIGHT 2021 GROVE ENGINEERING, PLLC ALL RIGHTS RESERVED. UNAUTHORIZED DUPLICATION IS A VIOLATION OF ALL APPLICABLE LAWS



WILLIAM J. GROVE, PE
NYS LICENSE #084111

B677 STATE ROUTE 53
NAPLES, NEW YORK 14512
585-797-3989 PHONE
585-531-4084 FAX
grove.engineering@yahoo.com

GROVE

ENGINEERING

SITE PLAN & CONVENTIONAL SEPTIC SYSTEM DESIGN

PROPOSED PARSONS RESIDENCE

NOTT ROAD T.M.#112.01-1-6.200


TOWN OF
CANANDAIGUA
ONTARIO COUNTY
NEW YORK

OCTOBER 5, 2021

SHEET 5 OF 6

Warning and Disclaimer of Liability.


This Onsite Wastewater Treatment System design has been performed in compliance with all Town and State design requirements. A prudent design, however, does not necessarily imply that the system will be free from malfunction. The required soil percolation and soil depth tests may not reveal all the soil characteristics affecting operation. Further, unusual precipitation, disposal of some household and other chemicals and failure to pump out septic tanks as often as required are beyond the control and the responsibility of the designer. Therefore, in no event will this design create liability for the designer or design company.

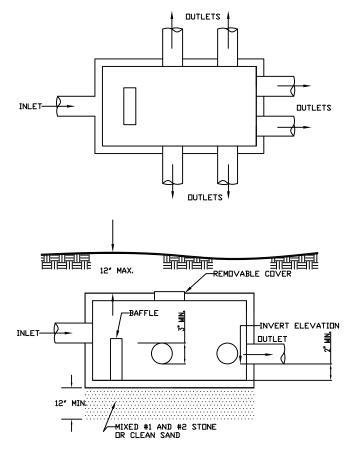



DISTRIBUTION BOX DETAILS


#### DISTRIBUTION & DROP BOX NOTES:

- 1. DISTRIBUTION BOX OR DROP BOXES USED MUST BE ACCEPTABLE TO THE WATERSHED INSPECTOR. (SEE 'SYSTEM PLAN SKETCH ' ON SHEET 1 OF 2 FOR LOCATION AND NUMBER OF LINES, DISTRIBUTION BOX OR DROP BOX TO HAVE AT LEAST DNE EXTRA PLUGGED DUTLET).
- 2. PIPE JOINTS TO BE WATERTIGHT
- 3. INVERT ELEVATIONS OF ALL OUTLET PIPES FROM THE DISTRIBUTION BOX MUST BE EQUAL USE OF FLOW ADJUSTABLE LEVELING DEVICES IS REQUIRED ON EACH OUTLET.
- INVERT ELEVATIONS OF ALL OUTLET TRENCHLINE PIPES FROM DROP BOXES MUST BE EQUAL, USE OF FLOW ADJUSTABLE LEVELING DEVICES IS REQUIRED ON EACH TRENCHLINE DUTLET.
- THE SLOPE OF OUTLET PIPES BETWEEN THE DISTRIBUTION BOX OR DROP BOX AND DISTRIBUTOR LATERALS TO BE AT LEAST 12 PER FOOT.
- 6. BAFFLES ARE REQUIRED. INLET PIPE SLOPE SHALL BE AT LEAST &
- A MINIMUM OF 2 FEET OF <u>SOLID</u> PIPE SHALL EXTEND LEVEL OUT OF DISTRIBUTION BOX OR DROP BOX FROM ALL OUTLETS.



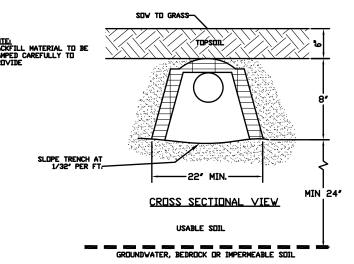




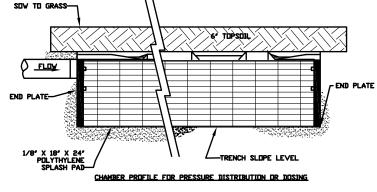

STANDARD ABSORPTION TRENCH 4" PERFORATED PIPE IN STONE TRENCH

-DR-

GRAVELLESS CHAMBER ABSORPTION TRENCH INFILTRATOR QUICK4 EQ-36 LOW PROFILE CHAMBER OR **EQUAL** 



SITE PLAN & CONVENTIONAL SEPTIC SYSTEM DESIGN

PROPOSED PARSONS RESIDENCE

NOTT ROAD T.M.#112.01-1-6.200

TOWN OF CANANDAIGUA ONTARIO COUNTY NEW YORK


OCTOBER 5, 2021

SHEET 6 DF 6

SITE PLAN APPROVAL PLANNING BOARD CHAIRPERSON DATE

CANANDAIGUA HIGHWAY & WATER SUPERINTENDENT DATE

It is a violation of the NYS Education Law for any person, unless he is acting under the direction of a licensed professional engineer or land surveyor, to after an item in any way. If an item bearing the seal of an engineer or land surveyor is altered, the altering engineer or land surveyor shall affix to the item his seal and the notation "altered by" followed by his signature and the date of such alteration, and a specific description of the alteration.



GROVE ENGINEERING, PLLC ALL RIGHTS RESERVED. INAUTHORIZED DUPLICATION IS A DLATION OF ALL APPLICABLE LAW

8677 STATE ROUTE 53 NAPLES, NEW YORK 14512 585-797-3989 PHONE 585-531-4084 FAX grove.engineering@yahoo.com

GROVE

ENGINEERING

Warning and Disclaimer of Liability.
This Onsite Wastewater Treatment System design has been performed in compliance with all Town and State design requirements. A prudent design, however, does not necessarily imply that the system will be free from malfunction. The required soil perclation and soil depth tests may not reveal all the soil characteristics affecting operation. Further, unusual precipitation, disposal of some household and other chemicals and failure to pump out septic tanks as often as required are beyond the control and the responsibility of the designer. Therefore, in no event will this design create liability for the designer or design company.