

## Development Clerk

---

**From:** Director of Development <dod@townofcanandaigua.org>  
**Sent:** Thursday, October 06, 2016 12:31 PM  
**To:** john@law14424.com  
**Cc:** 'Eric Cooper'; 'Chris Jensen'; 'Development Clerk'; 'Tom Schwartz'  
**Subject:** FW: Genecco project Roof color  
**Attachments:** image2016-10-05-131247.pdf

John,

Thank you for your email in which your client wishes to use the "Ivy Green" color for the roof of the proposed Stella's project. The original submission to the Town of Canandaigua Development Office and Planning Board included a "green" color roof system. The Development Office nor the Planning Board will dictate the exact color of green, so please let your client know that the "Ivy Green" is acceptable for the purposes of the roof color system for the Town of Canandaigua.

We look forward to seeing you on October 11, 2016 at 6:30pm for the continuation of the site plan amendment for the new configuration.

Michelle – please place a copy of this email in the project file and webportal for Planning Board members.

Thank you!

**Doug Finch**, Director of Development  
Town of Canandaigua  
5440 Route 5 & 20 West  
Canandaigua, NY 14424  
P: (585)394-1120 x2234  
F: (585)394-9476

CC: PROJECT FILE

**From:** "John Polimeni" <john@law14424.com>  
**Subject:** Genecco project Roof color  
**Date:** October 5, 2016 at 1:41:55 PM EDT  
**To:** "Doug Finch" <dfinch88@yahoo.com>

**Doug**

**Just want to confirm on the color of the Genecco roofing material. The contractor needs to place the order by tomorrow end of day.**

**I have attached the color options. The selected color is the "Ivy Green"(only green option).**

**Can you check and confirm?**

**Empire Rib 26 ga.** Our most popular metal roofing and sidewall panel. Ideal for a wide variety of applications.

24" purlin spacing recommended, with a pitch of at least a 2 1/2 inches per ft. On low slopes butyl tape can be used on overlaps to ensure weather tightness.

- ▶ Cut to your length within 24 hours.
- ▶ Length up to 48 ft. to reduce or eliminate end laps.
- ▶ 36" panel coverage.
- ▶ 40 yr. Limited paint warranty on premium.

See facing page for available grades



## Protection

The Weather XL paint system from Valspar is recognized for its remarkable color and gloss retention as well as its superior chalk resistance. This exceptional level of silicone polyester performance is due to a unique formulation that combines the durability of ceramic and other select inorganic pigments with the strength of a breakthrough silicone polyester resin which is highly resistant to stains, abrasion, and metal marking. These features allow the panels to endure the physical abuses of fabrication, transit and construction, and provides excellent performance in any weather.

top coat  
Valspar Weather XL  
SMP paint

primer

bonderizing pre-treatment  
Galvalume® / zinc


base steel



**Touch up paint** is available in matching colors. It is recommended that a small brush be used to apply touch up paint to scratches and those areas in need of repair. Touch up paint does not have the superior chalk and fade resistance of the factory applied baked on paint finish and will normally discolor at an accelerated rate. Aerosol paint should not be used on panels because of the overspray that might occur.


TOHMO-Factory Weather DAIGUA  
R DEVELOPMENT OFFICE  
E  
C  
E  
D  
OCT 6 2016  
FOR REVIEW

## Additional panel profiles available



**PBR panel**

26 ga. available in 7 colors and galvalume. Performs well on roof pitches as low as 1:12 and on spans up to 4' for 26 gauge. For excellent strength and leak resistance, PBR panel has full 1 1/4" high ribs which are 1" wide at the top and over 3" wide at the base. Sealant tape and stitch screws are required for improved leak resistance. PBR panel is used mostly for steel frame buildings, but can also be used on wood frame buildings. Colors: Brite white, Ivy green, Brown, Charcoal, Gray, Light stone, Burnished slate. 2-3 day lead time, length up to 48'.



**Ameridrains**  
2 wk lead time

1 1/4" corrugated



2 1/2" corrugated




**24" wide panels**  
bare galvalume only  
lengths: 8' 10' 12'

5 V crimp



## Empire Rib color chart

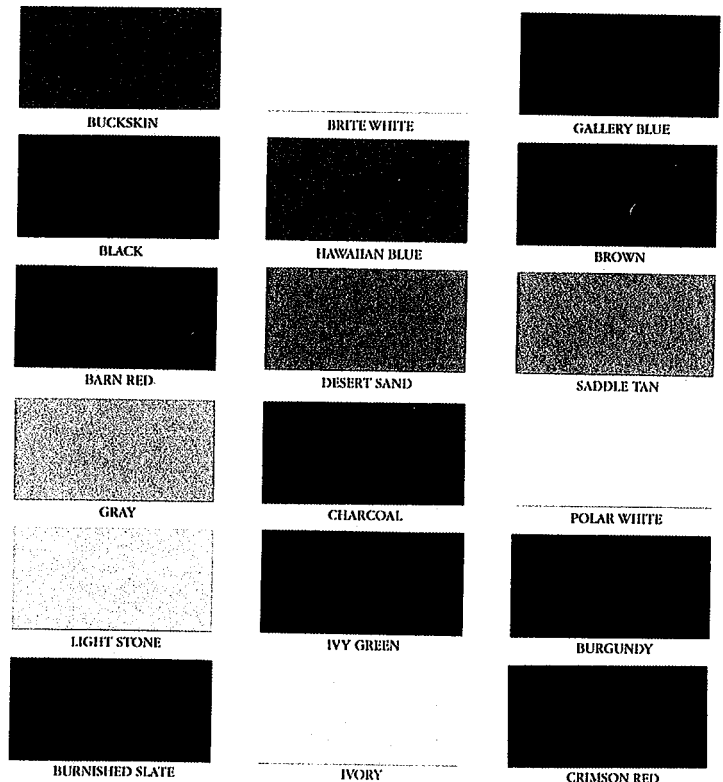

Color shown may vary from actual color  
final selection should be from actual color chip