


SITE PLANS
for
THE HESS RESIDENCE

4645 WEST LAKE ROAD
COUNTY ROAD 16

SITUATE IN:
TOWN OF CANANDAIGUA - ONTARIO COUNTY - STATE OF NEW YORK


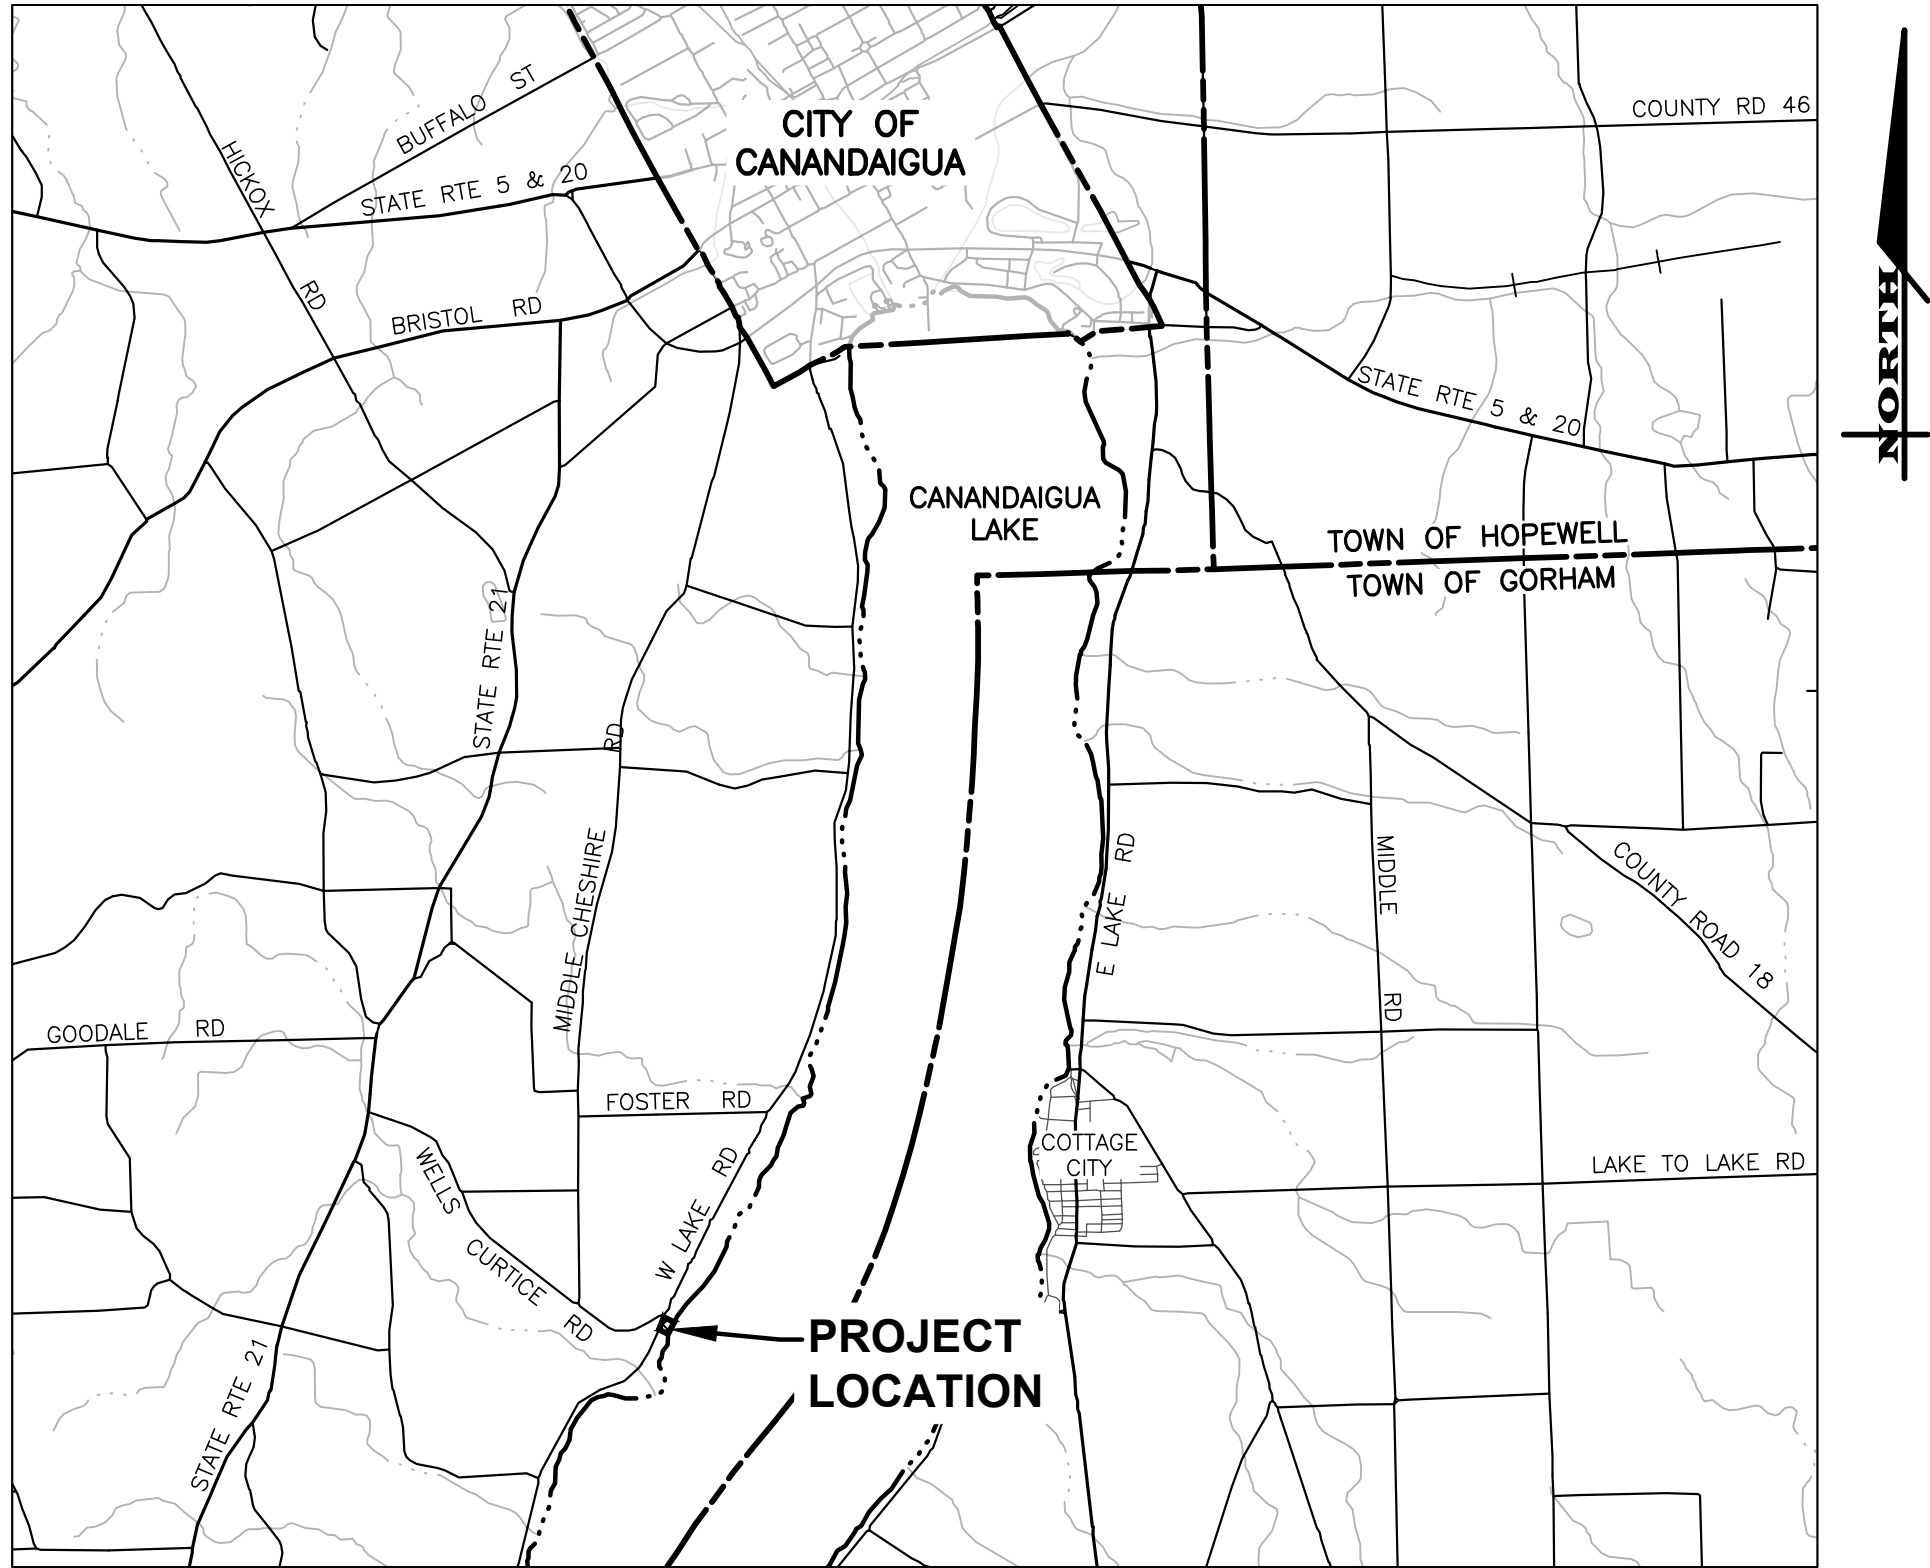


LOCATION MAP
NOT TO SCALE


MARATHON
ENGINEERING
ROCHESTER LOCATION
39 CASCADE DRIVE
ROCHESTER, NY 14614
585-458-7770
ITHACA LOCATION
840 HANSHAW RD, STE 12
ITHACA, NY 14850
607-241-2917
www.marathoneng.com

LIST OF DRAWINGS		
No.	DWG. No.	DESCRIPTION
1	COVER	COVER
2	V1.0	EXISTING CONDITIONS PLAN
3	C2.0	SITE PLAN
4	C3.0	GRADING & UTILITY PLAN
5	C4.0	EROSION CONTROL AND STABILIZATION PLAN
6	C5.0	LANDSCAPING & RESTORATION PLAN

File: Z:\Engineering\Job Files\1099-20\Drawings\1099-20 Topo.dwg, Last saved: 6/9/2020, Plot Date: 6/10/2020, By: LUCAS BUSHEN, Plot Style: MARATHON STANDARD.CTB

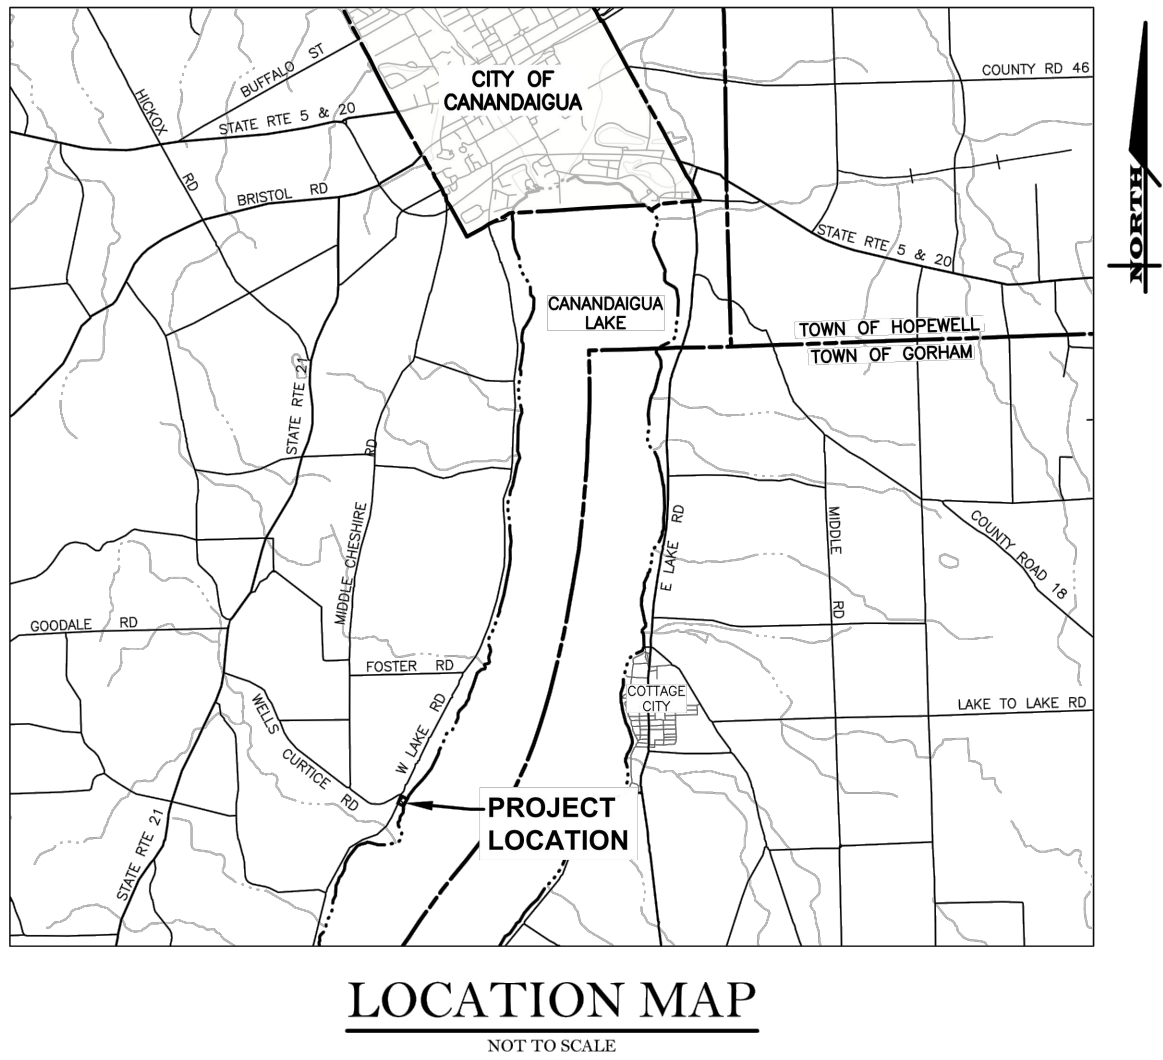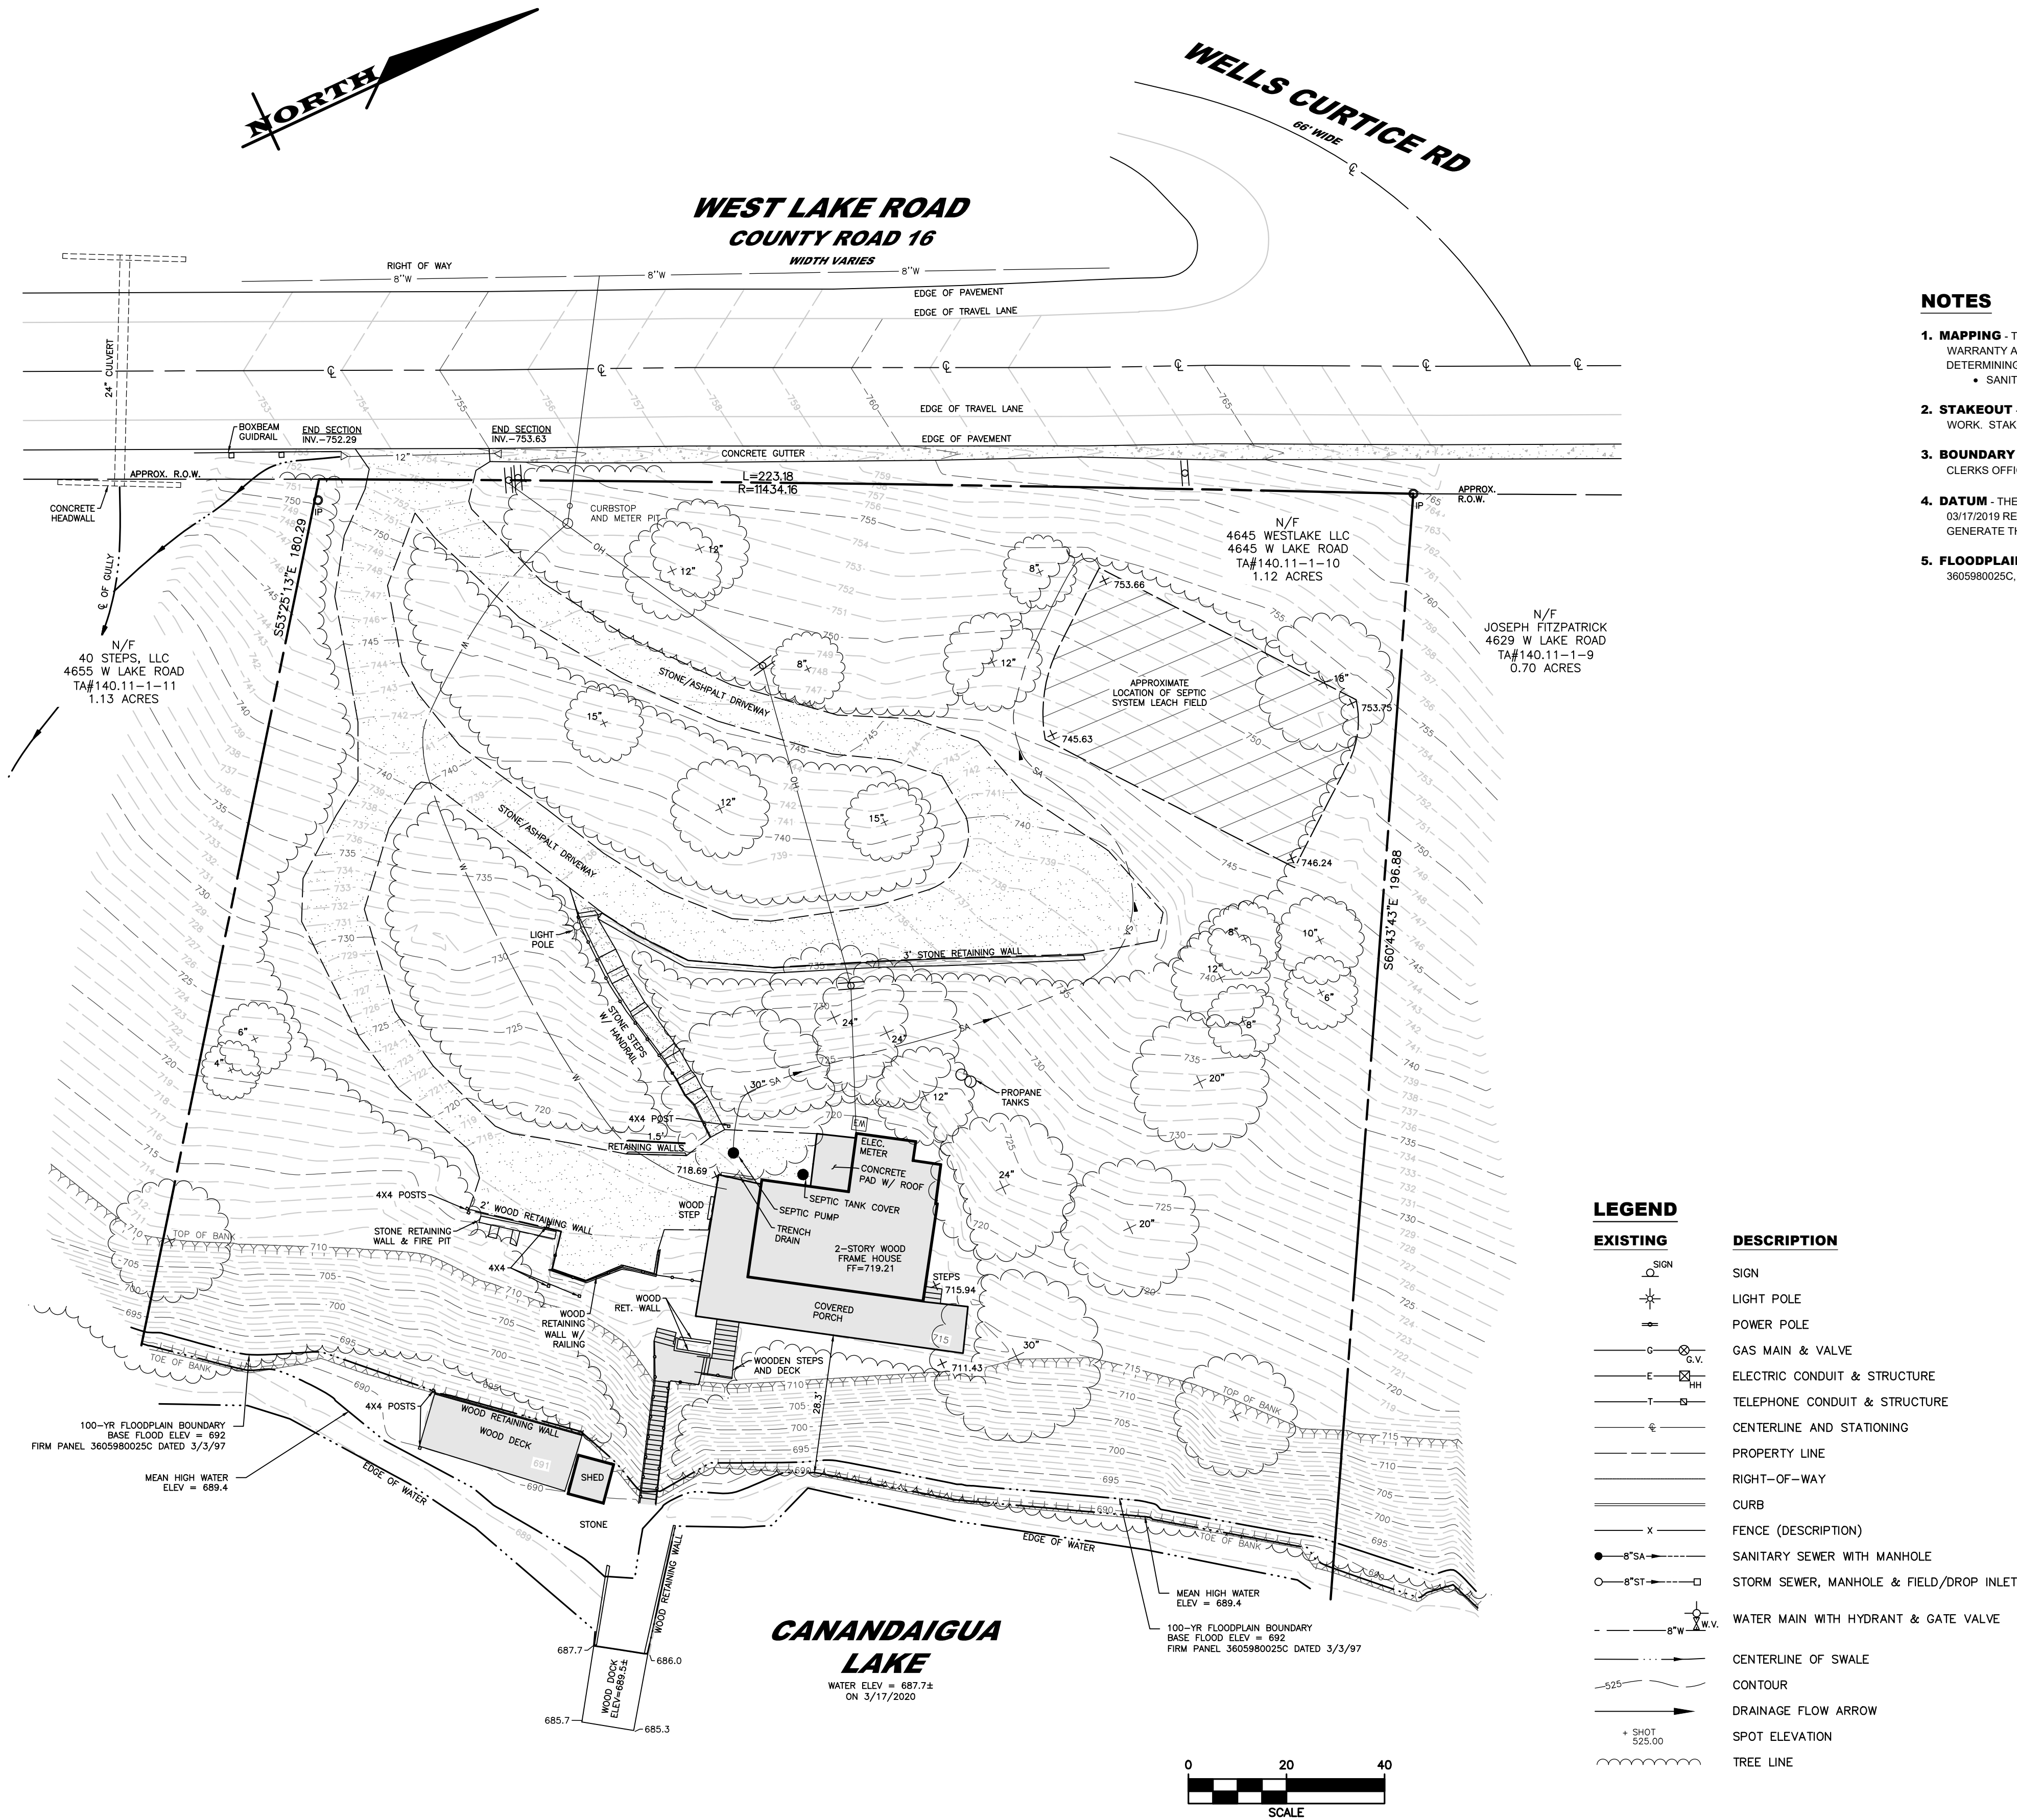

- NOTES**
- MAPPING** - THE EXISTING UNDERGROUND UTILITIES WERE PLOTTED BASED ON RECORD MAPPING SUPPLIED BY OTHERS. THE ENGINEER MAKES NO WARRANTY AS TO THE LOCATION, SIZE, TYPE, ELEVATION, AND/OR NUMBER OF EXISTING UTILITIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THE HORIZONTAL AND VERTICAL LOCATION OF UTILITIES IN THE VICINITY OF THE NEW INFRASTRUCTURE.
 - SANITARY SEWERS WERE PLOTTED FROM RECORD MAPS RECEIVED FROM CANANDAIGUA LAKE WATERSHED COMMISSION ON 3/17/2020
 - STAKEOUT** - THE CONTRACTOR SHALL NOTIFY DIG SAFELY NEW YORK (1-800-962-7962) FOR A UTILITY STAKEOUT 48 HOURS IN ADVANCE OF COMMENCING WORK. STAKEOUT OF PRIVATE UTILITIES SHALL BE COORDINATED WITH THE OWNER.
 - BOUNDARY** - BOUNDARY INFORMATION WAS TAKEN FROM "LANDS TO BE CONVEYED BY KARL M. & MILDREN B. WILSON" APPROVED BY ONTARIO COUNTY CLERKS OFFICE FILED 05/23/1962 AND IS SHOWN FOR GRAPHICAL REPRESENTATION ONLY.
 - DATUM** - THE VERTICAL DATUM WAS SET USING ELEVATION DATA TAKEN FROM THE WATER ELEVATION OF CANANDAIGUA LAKE ON THE DAY OF SURVEY 03/17/2019 RECORDED BY CANANDAIGUA WASTEWATER TREATMENT PLANT. VERTICAL DATUM IS THEREFORE ASSUMED. VERTICAL CONTROL USED TO GENERATE THE CONTOURS ON THIS PLAN WAS ESTABLISHED USING THE FINISHED FLOOR OF THE 4 BEDROOM HOUSE AS A BENCHMARK.
 - FLOODPLAIN** - THE PROPERTY IS LOCATED IN ZONE 'X' AND IS/IS NOT LOCATED GRAPHICALLY IN THE FLOODPLAIN AS SHOWN ON COMMUNITY PANEL No 3605980025C, DATED 03/03/1997

LEGEND	
EXISTING	DESCRIPTION
	SIGN
	LIGHT POLE
	POWER POLE
	GAS MAIN & VALVE
	ELECTRIC CONDUIT & STRUCTURE
	TELEPHONE CONDUIT & STRUCTURE
	CENTERLINE AND STATIONING
	PROPERTY LINE
	RIGHT-OF-WAY
	CURB
	FENCE (DESCRIPTION)
	SANITARY SEWER WITH MANHOLE
	STORM SEWER, MANHOLE & FIELD/DROP INLET
	WATER MAIN WITH HYDRANT & GATE VALVE
	CENTERLINE OF SWALE
	CONTOUR
	DRAINAGE FLOW ARROW
	SPOT ELEVATION
	TREE LINE

MARATHON ENGINEERING
ROCHESTER LOCATION
39 CASCADE DRIVE
ROCHESTER, NY 14614
585-458-7770
ITHACA LOCATION
840 HANSHAW RD, STE 12
ITHACA, NY 14850
607-241-2917
www.marathoneng.com

SITE PLANS
for
THE HESS RESIDENCE

STATE OF NEW YORK
4645 WEST LAKE ROAD
ONTARIO COUNTY
TOWN OF CANANDAIGUA

JOB NO: 1099-20
SCALE: AS SHOWN
DRAWN: LJB
DESIGNED: RPB
DATE: 06/10/2020

REVISIONS		
DATE	BY	REVISION

THIS IS A LOCATION OF NEW YORK STATE ENGINEERING MAPS. THE LOCATION OF A PROPERTY LINE OR A FENCE LINE IS NOT A GUARANTEE OF THE LOCATION OF A PROPERTY LINE OR A FENCE LINE. THE LOCATION OF A PROPERTY LINE OR A FENCE LINE IS NOT A GUARANTEE OF THE LOCATION OF A PROPERTY LINE OR A FENCE LINE.

COPYRIGHT © 2020 MARATHON ENG.





DRAWING TITLE:
**EXISTING
CONDITIONS PLAN**

2 of 6
SHEET No: **V1.0**
1099-20
JOB No: DRAWING No:

APPROVED BY:
PLANNING BOARD CHAIRPERSON
DATE:

File: Z:\Engineering\Job Files\1099-20\Drawings\Sheets\C2.0.dwg, Last saved: 6/10/2020, Plot Date: 6/10/2020, By: LUCAS BUSHEV, Plot Style: ---

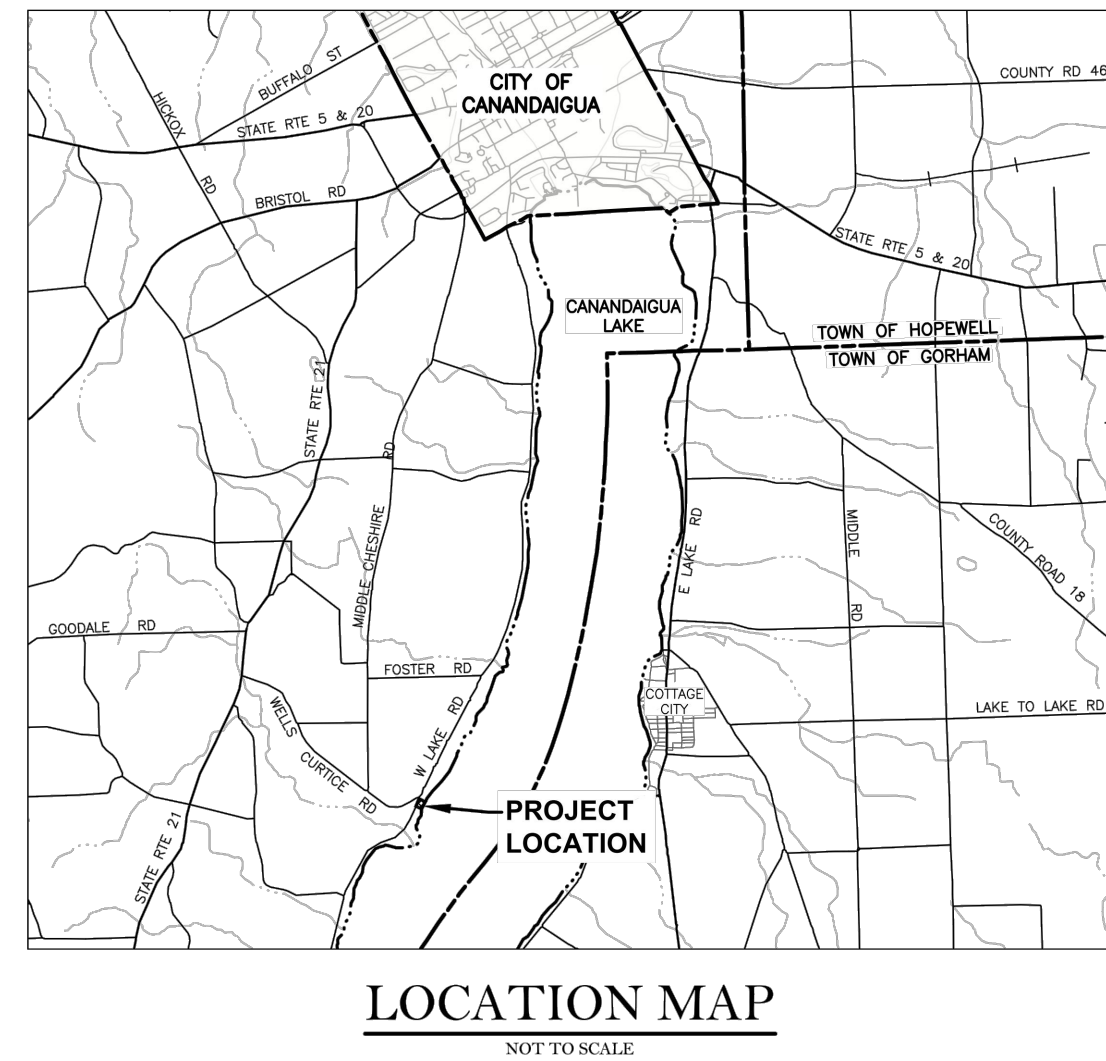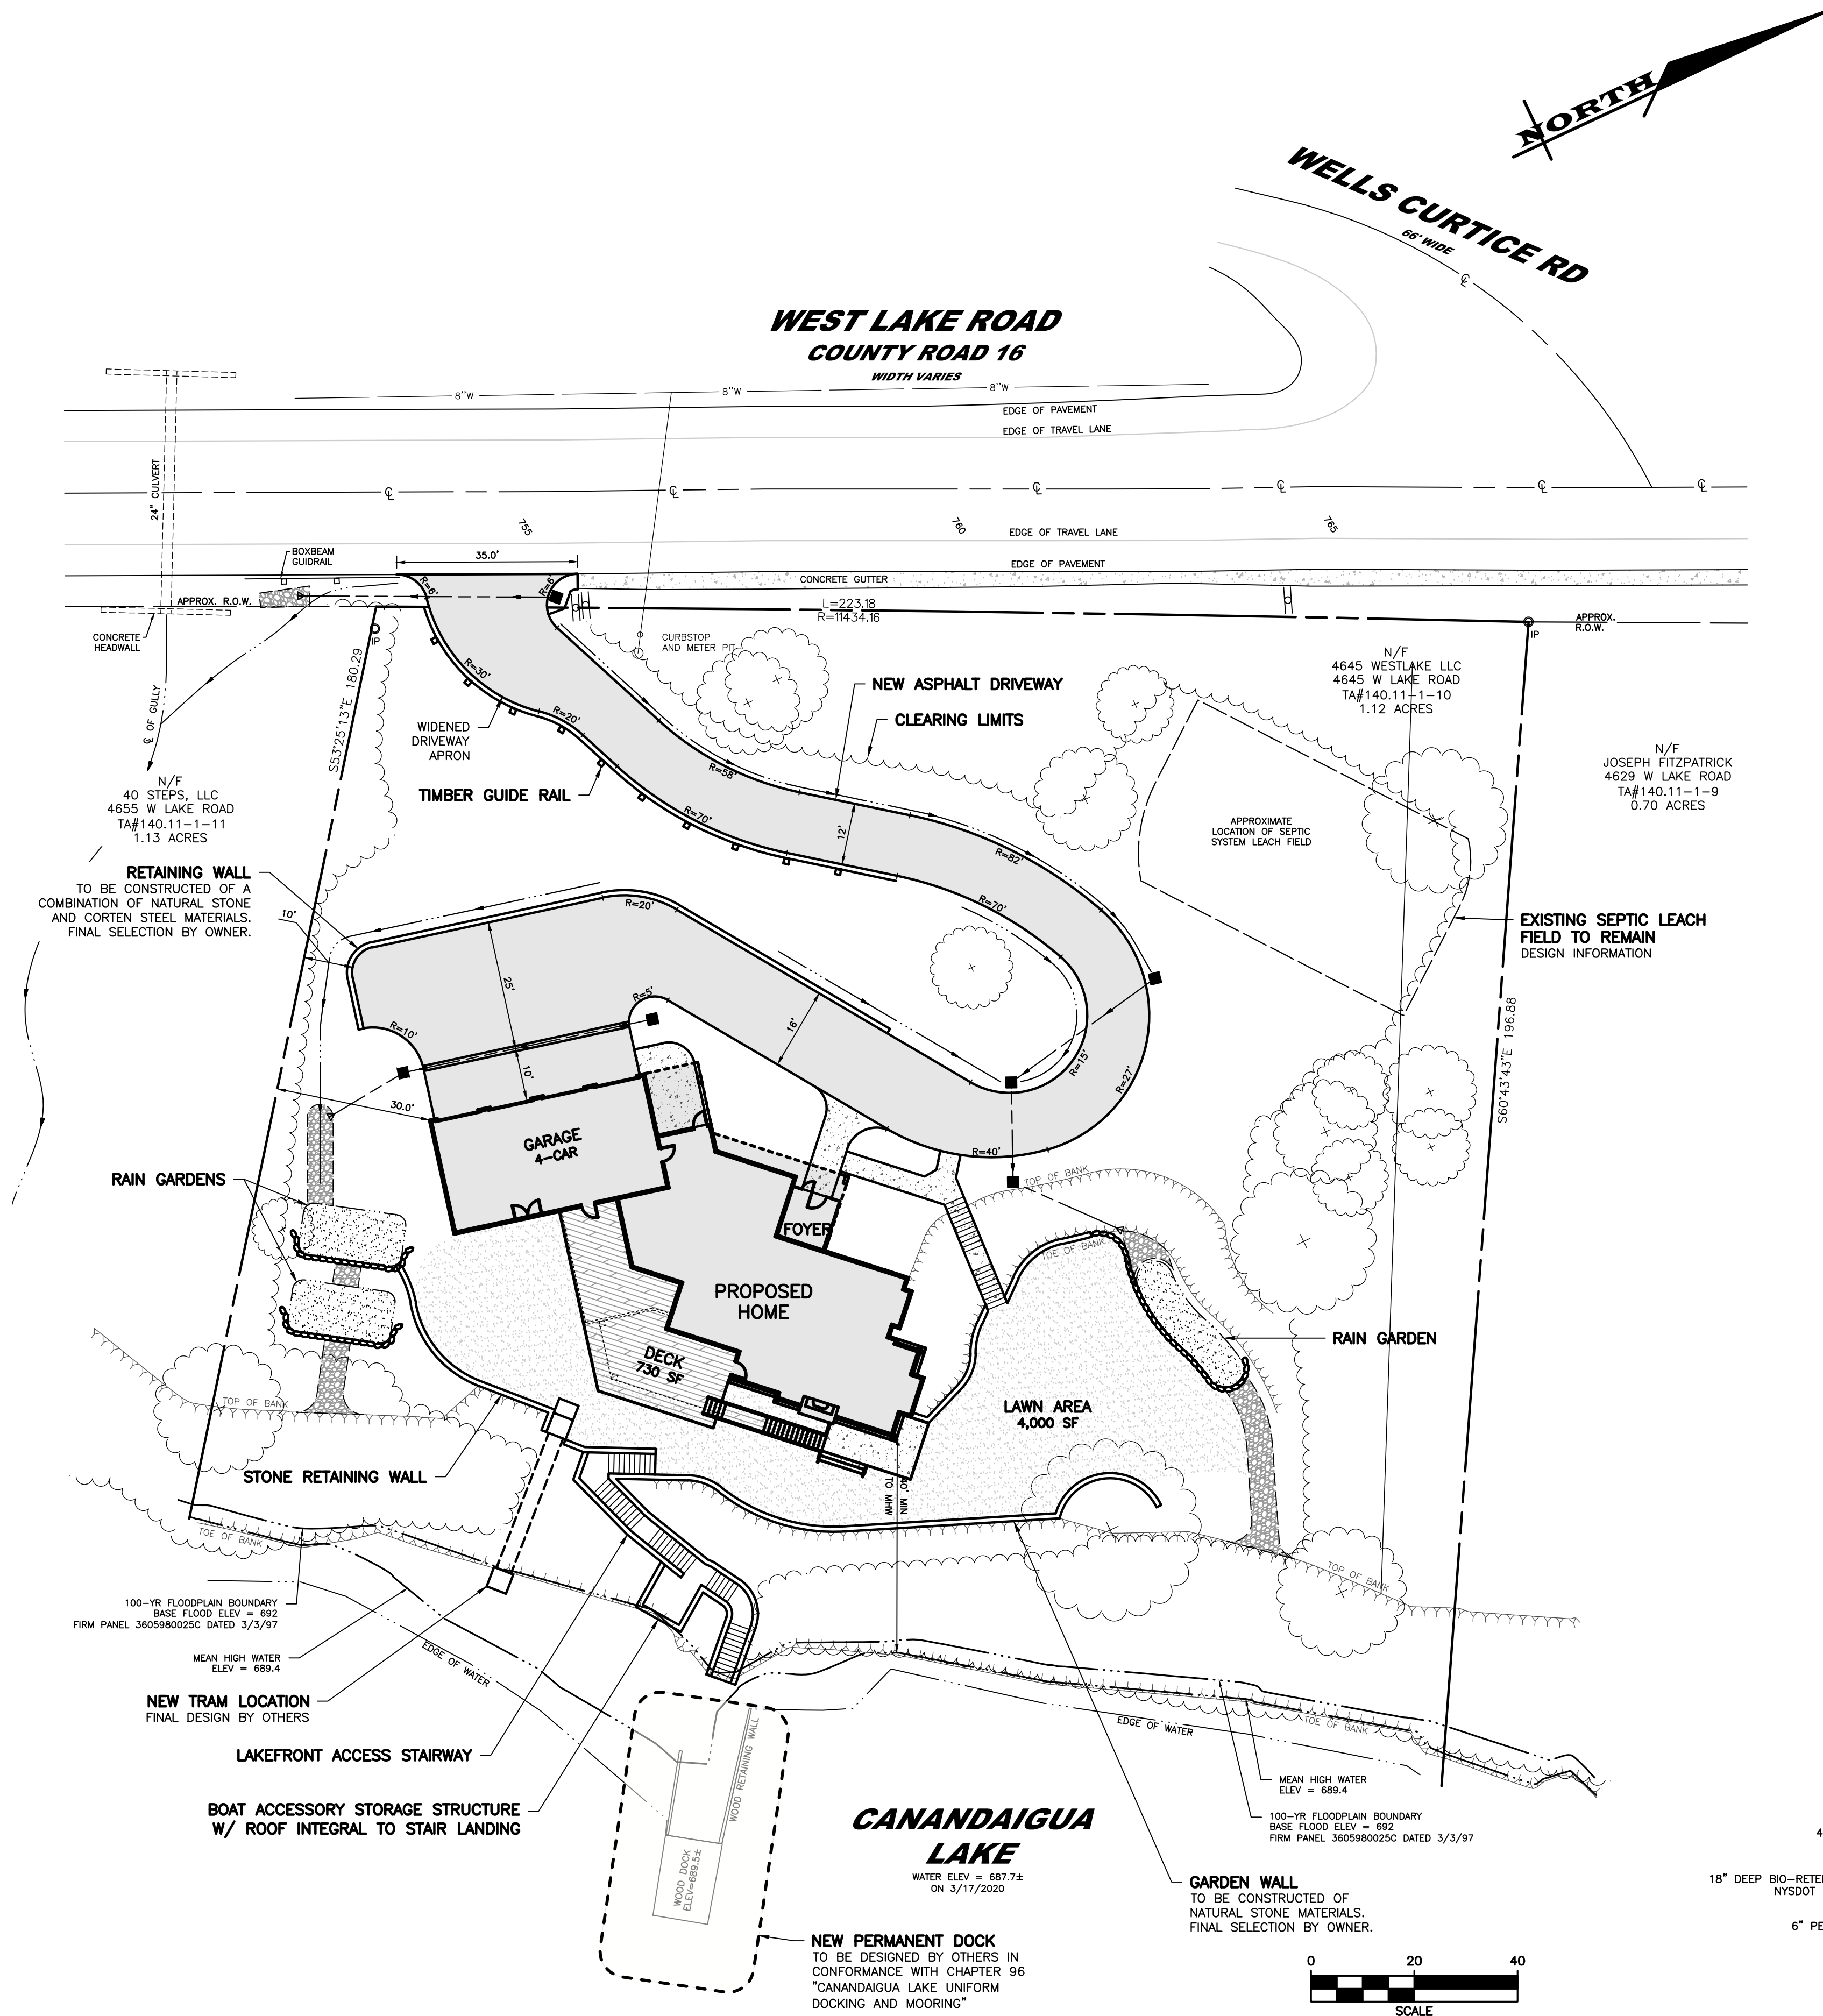

PROJECT STATISTICS

- GENERAL:
 - APPLICANT – MICHAEL HESS
3713 WEST LAKE ROAD (CR 16)
CANANDAIGUA, NY 14424
 - PROPERTY ADDRESS – 4645 WEST LAKE ROAD (CR 16)
TOWN OF CANANDAIGUA, NEW YORK
 - TAX ACCOUNT – 140.11–10.000
 - NEAREST INTERSECTION – JUST SOUTH OF THE WELLS CURTICE RD XION


2. ZONING REGULATIONS:

- ZONING DISTRICT – RESIDENTIAL LAKE DISTRICT (RLD)
- CODE REQUIREMENTS –

ITEM	REQUIRED	EXISTING	PROPOSED
MIN. LOT AREA	20,000 SF	48,787 SF	48,787 SF
MIN. LOT WIDTH	125 FT	223 FT	223 FT
MAX BLDG. COVERAGE	15%	4%	7%
MAX LOT COVERAGE	25%	19%	22%
BUILDING HEIGHT	25 FT	TBD	25 FT
PRINCIPAL BUILDING SETBACKS:			
FRONT SETBACK	60 FT	132.3 FT	87.8 FT
SIDE SETBACK	12 FT	78.2 FT	30.0 FT
REAR (LAKE) SETBACK	60 FT	28.3 FT	41.8 FT
ACCESSORY BUILDING SETBACKS:			
SIDE SETBACK	12 FT	91.2 FT	88.2 FT
REAR (LAKE) SETBACK	15 FT	9.5 FT	20.9 FT

3. PARCEL STATISTICS:

- AREA – 1.12 ACRES
- EXISTING CONDITIONS: RESIDENTIAL COTTAGE W/ 1 ACCESSORY STRUCTURE (SHED) AND PRIVATE SEPTIC SYSTEM
- PROPOSED CONDITIONS: NEW RESIDENTIAL COTTAGE WITH NEW ACCESSORY STORAGE SHED AND IMPROVED DRIVEWAY. EXISTING SEPTIC SYSTEM TO BE UTILIZED.

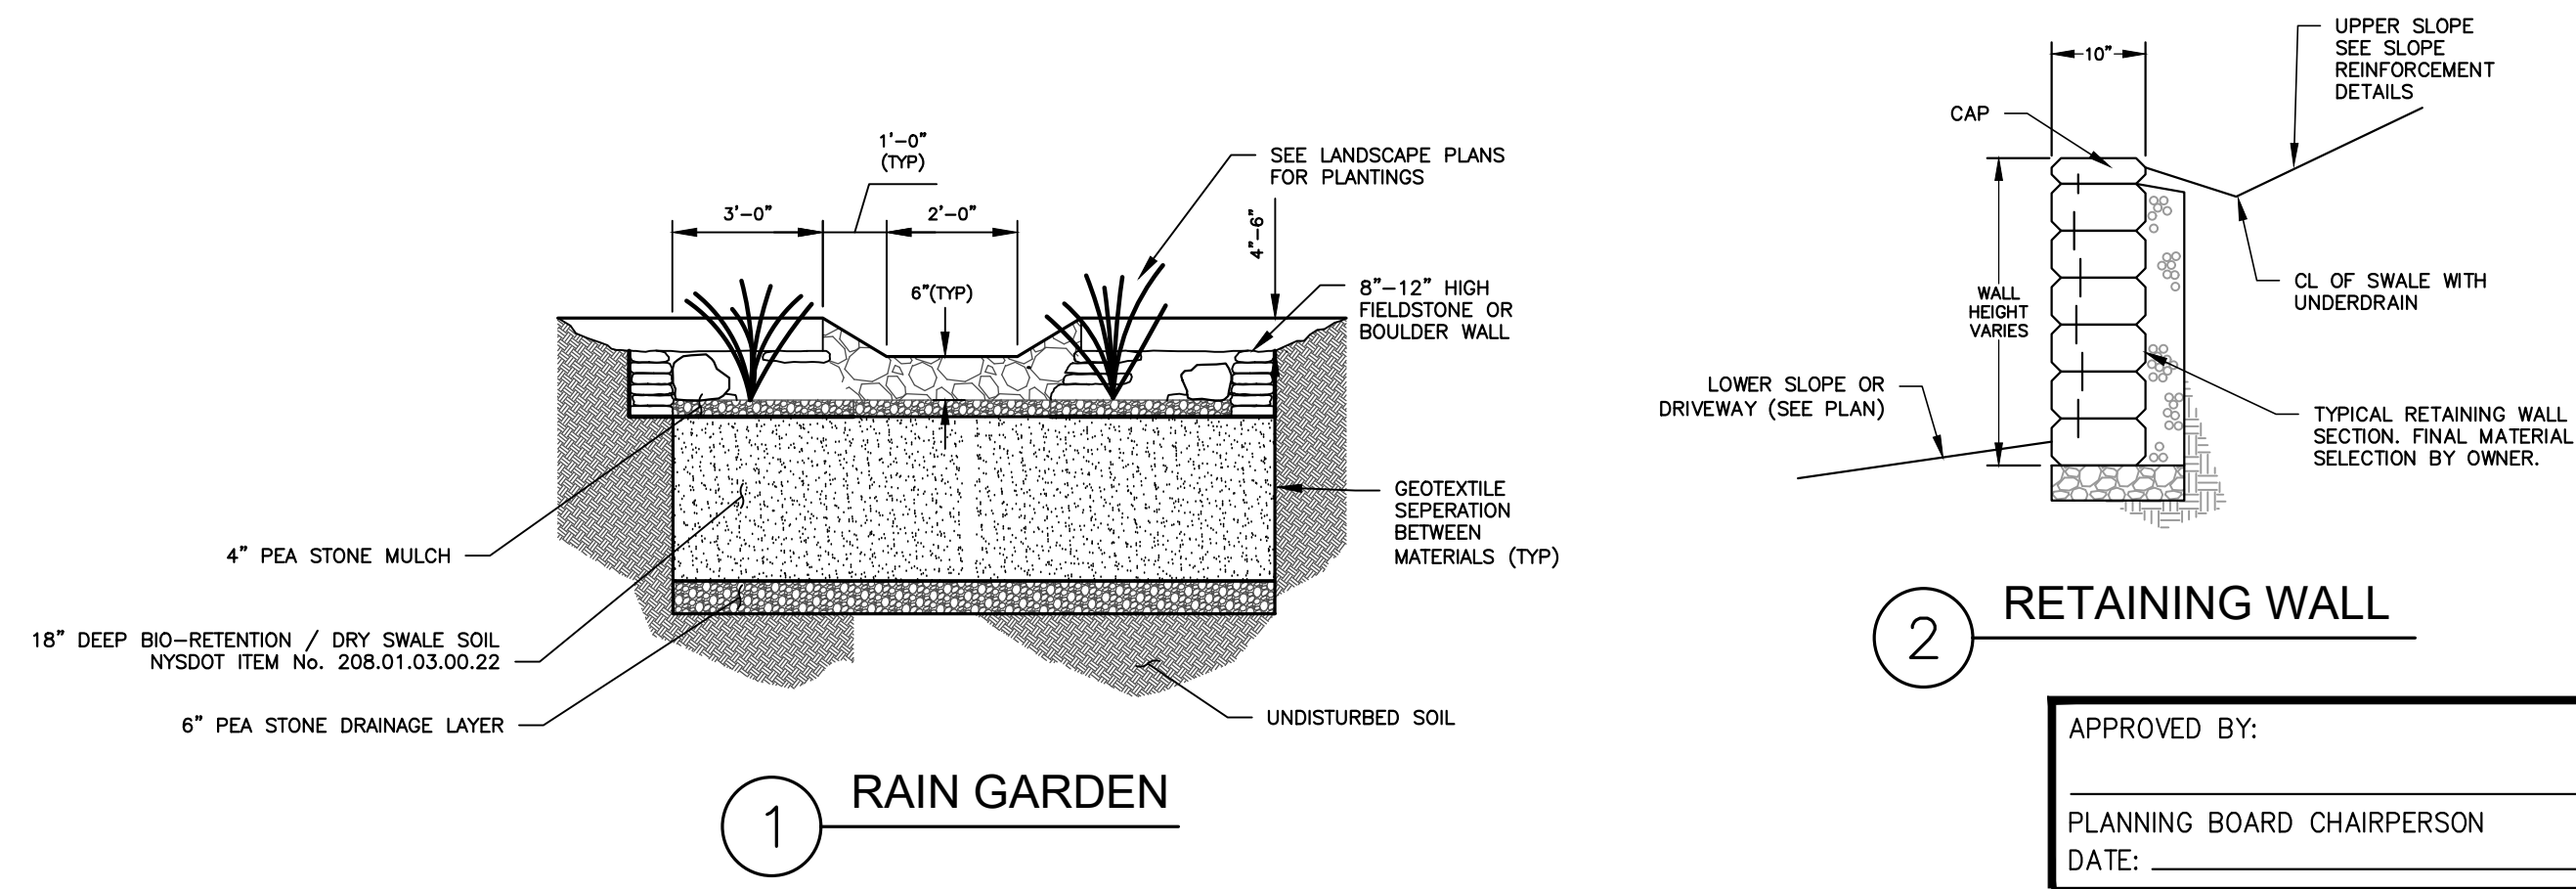

SITE PLANS for THE HESS RESIDENCE

STATE OF NEW YORK

4645 WEST LAKE ROAD
ONTARIO COUNTY

TOWN OF CANANDAIGUA

JOB NO: 1099-20
SCALE: AS SHOWN
DRAWN: LJB
DESIGNED: RPB
DATE: 06/10/2020

REVISIONS

DATE	BY	REVISION
------	----	----------

--	--	--

THIS IS A NOTIFICATION OF NEW YORK STATE REGULATION ARTICLE 16, SECTION 2201 FOR ANY PERSON, FIRM OR ENTITY, UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER OR LAND SURVEYOR, TO ALTER IN ANY MANNER, AND BEARING THE SEAL OF A PROFESSIONAL ENGINEER OR LAND SURVEYOR, ANY DRAWING, SPECIFICATION, REPORT, OR OTHER DOCUMENT, OR TO SIGN ANY SUCH DOCUMENT, WITHOUT THE WRITTEN CONSENT OF THE ENGINEER OR LAND SURVEYOR, IS A VIOLATION OF THE PROFESSIONAL ENGINEERING AND LAND SURVEYING LAWS OF THE STATE OF NEW YORK, AND SUCH VIOLATION IS A CRIME UNDER THE LAWS OF THE STATE OF NEW YORK.



COPYRIGHT © 2020 MARATHON ENG.



DRAWING TITLE:
SITE PLAN

3 of 6 SHEET No:	C2.0
1099-20 JOB No:	DRAWING No:


File: Z:\Engineering\Job Files\1099-20\Drawings\1099-20.dwg, Plot Date: 6/10/2020, By: LUCAS BUSHEV, Plot Style: MARATHON STANDARD.CTB

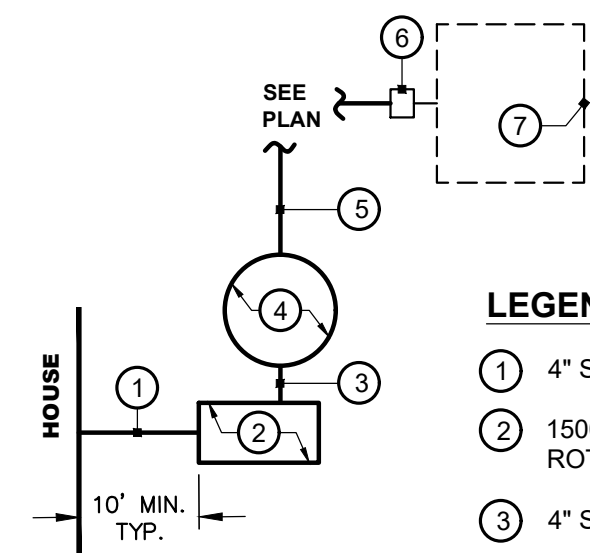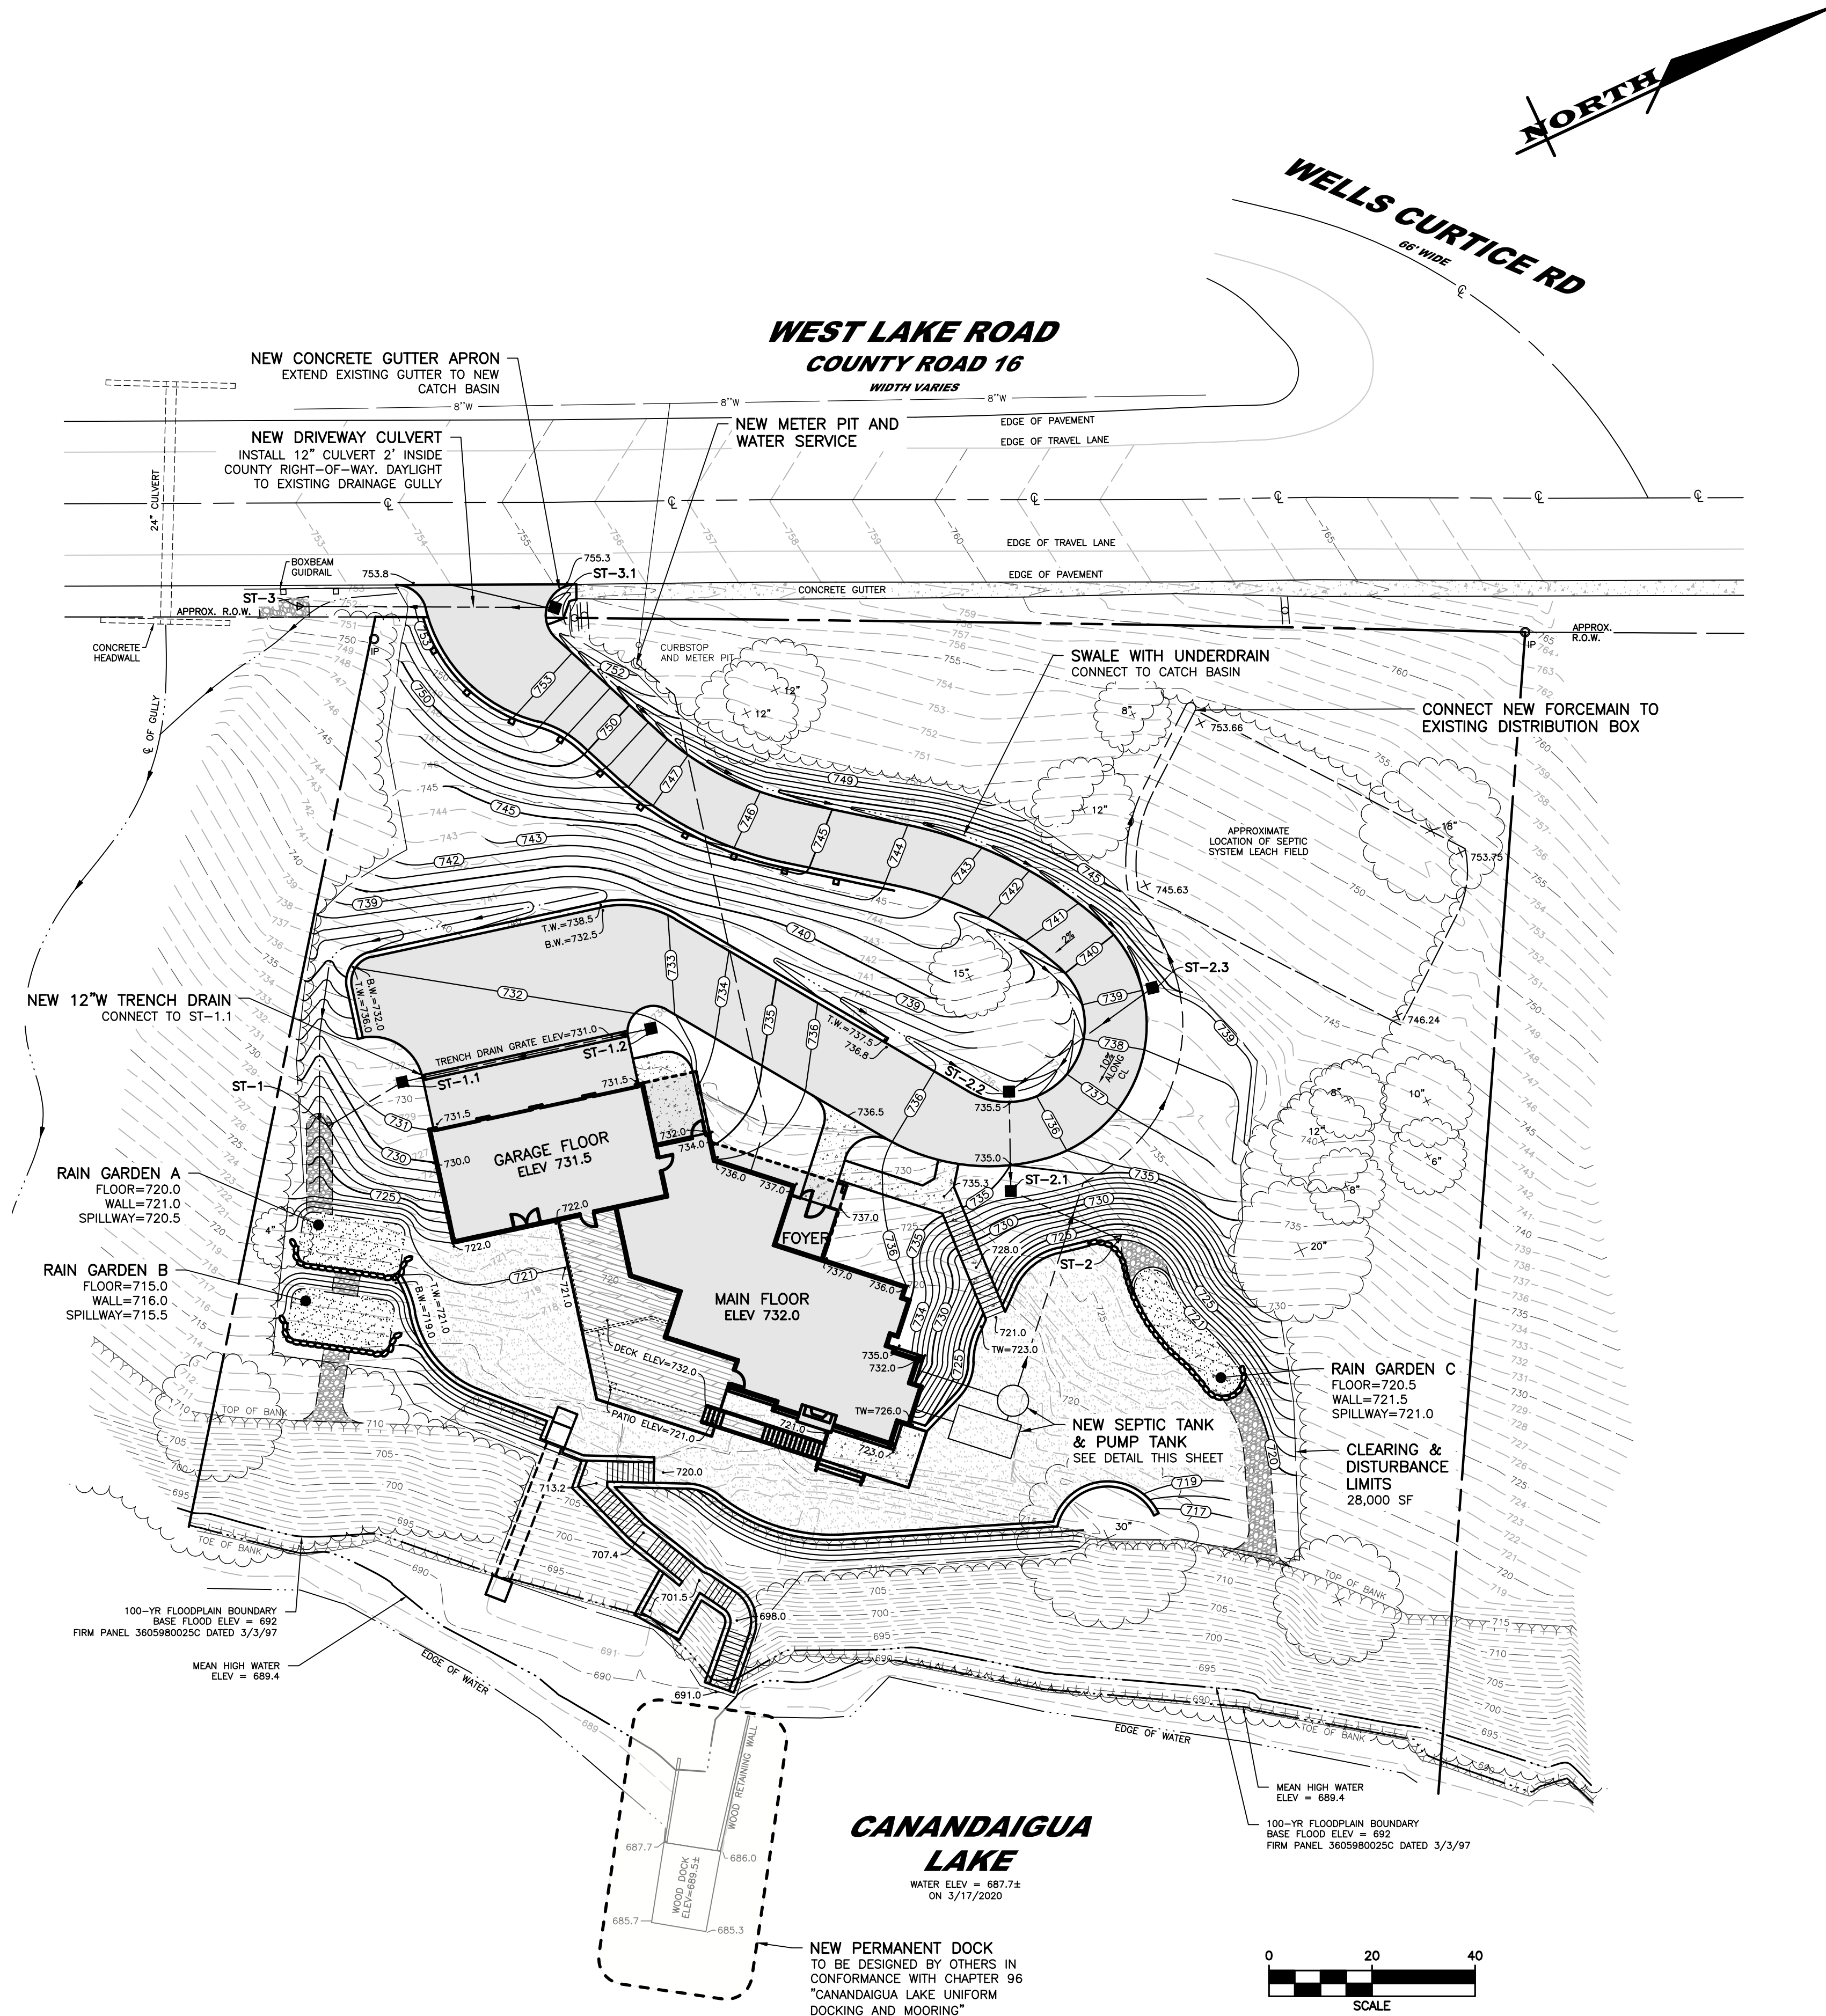


- LEGEND**
- 1 4" SCHEDULE 40 PVC PIPE @ 1/4" / FT. MINIMUM SLOPE.
 - 2 1500- gal POLYPROPYLENE SEPTIC TANK (2 CHAMBER, ROTH OR INFILTRATOR BRAND ACCEPTABLE)
 - 3 4" SCHEDULE 40 PVC PIPE @ 1/8" / FT. MINIMUM SLOPE.
 - 4 KISTNER P.P.-PT-06" PUMP TANK
 - 5 1.5" PVC FORCE MAIN
 - 6 EXISTING DISTRIBUTION BOX
 - 7 EXISTING LEACH FIELD

1 SEPTIC SYSTEM MODIFICATIONS


STORM STRUCTURE TABLE		
NAME	DESCRIPTION	DETAILS
ST-1	12" END SECTION	INV 727.5 N (17 LF OF 12" ST @ 5%)
ST-1.1	2'SQ CATCH BASIN	TOP 730.0 INV 728.0 N (50 LF OF 12" ST @ 2%) INV 727.9 S (17 LF OF 12" ST @ 5%)
ST-1.2	2'SQ CATCH BASIN	TOP 731.0 INV 729.0 S (50 LF OF 12" ST @ 2%)
ST-2	12" END SECTION	INV 724.0 INV 732.1 W (19 LF OF 12" ST @ 5%) INV 732.0 E (23 LF OF 12" ST @ 43%)
ST-2.1	2'SQ CATCH BASIN	TOP 734.0 INV 732.1 N (34 LF OF 12" ST @ 8%) INV 733.0 E (19 LF OF 12" ST @ 5%)
ST-2.2	2'SQ CATCH BASIN	TOP 735.0 INV 733.1 N (34 LF OF 12" ST @ 8%) INV 733.0 E (19 LF OF 12" ST @ 5%)
ST-2.3	2'SQ CATCH BASIN	TOP 738.0 INV 736.0 S (34 LF OF 12" ST @ 8%)
ST-3	12" END SECTION	INV 751.0 N (50 LF OF 12" ST @ 1%)
ST-3.1	2'SQ CATCH BASIN	TOP 753.5 INV 751.5 S (50 LF OF 12" ST @ 1%)

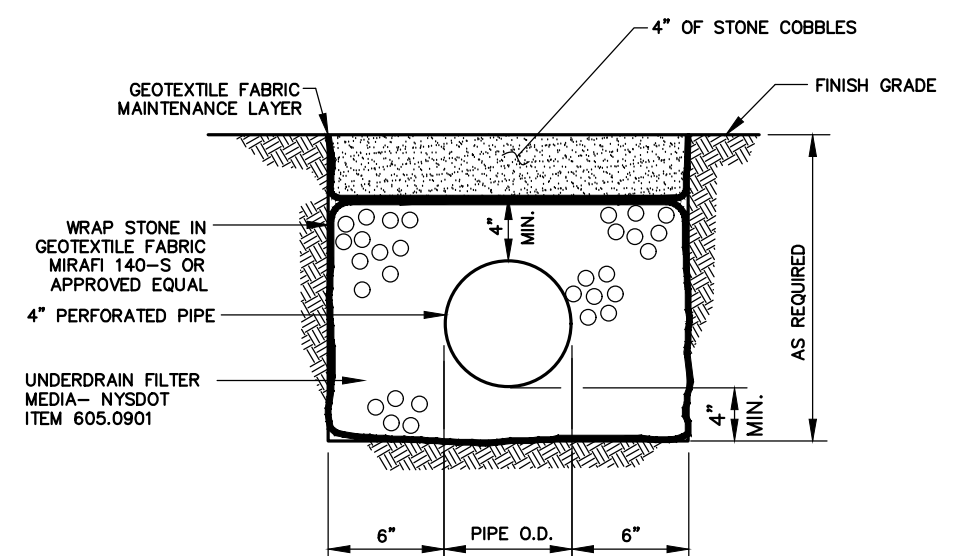

2 SWALE UNDERDRAIN

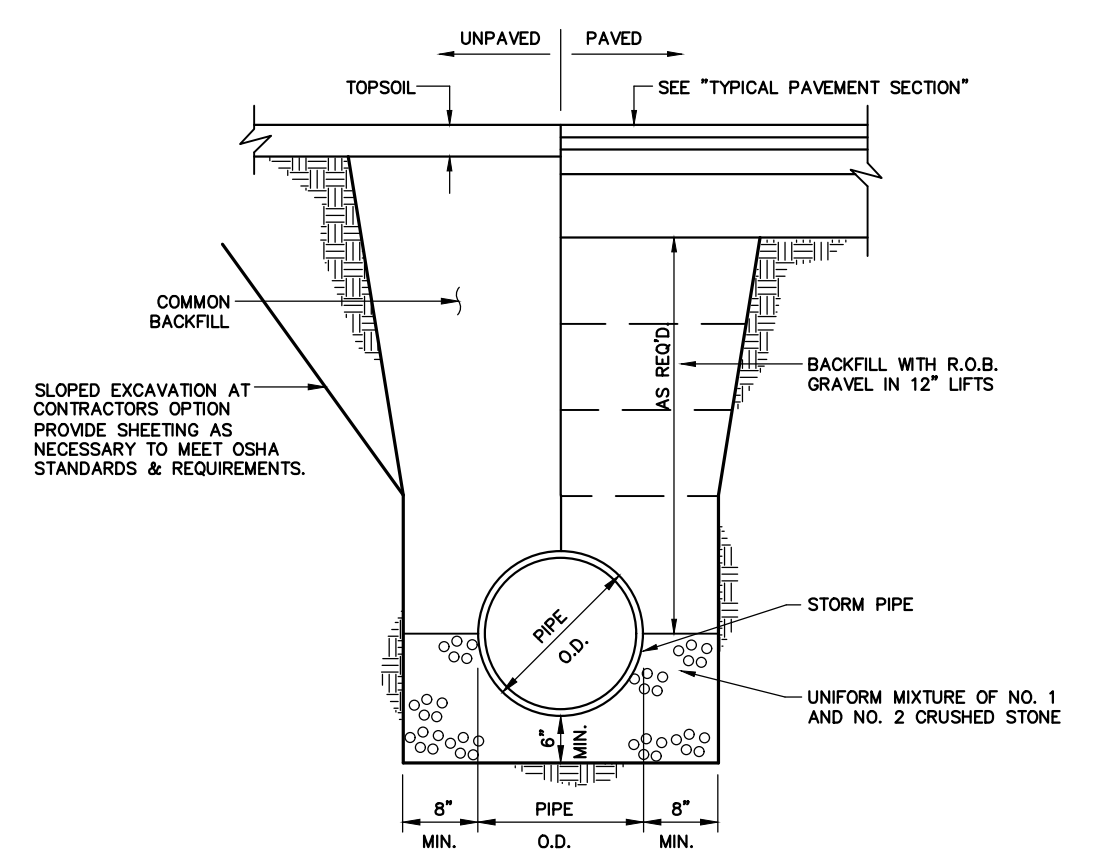

3 STORM TRENCH SOLID PIPE

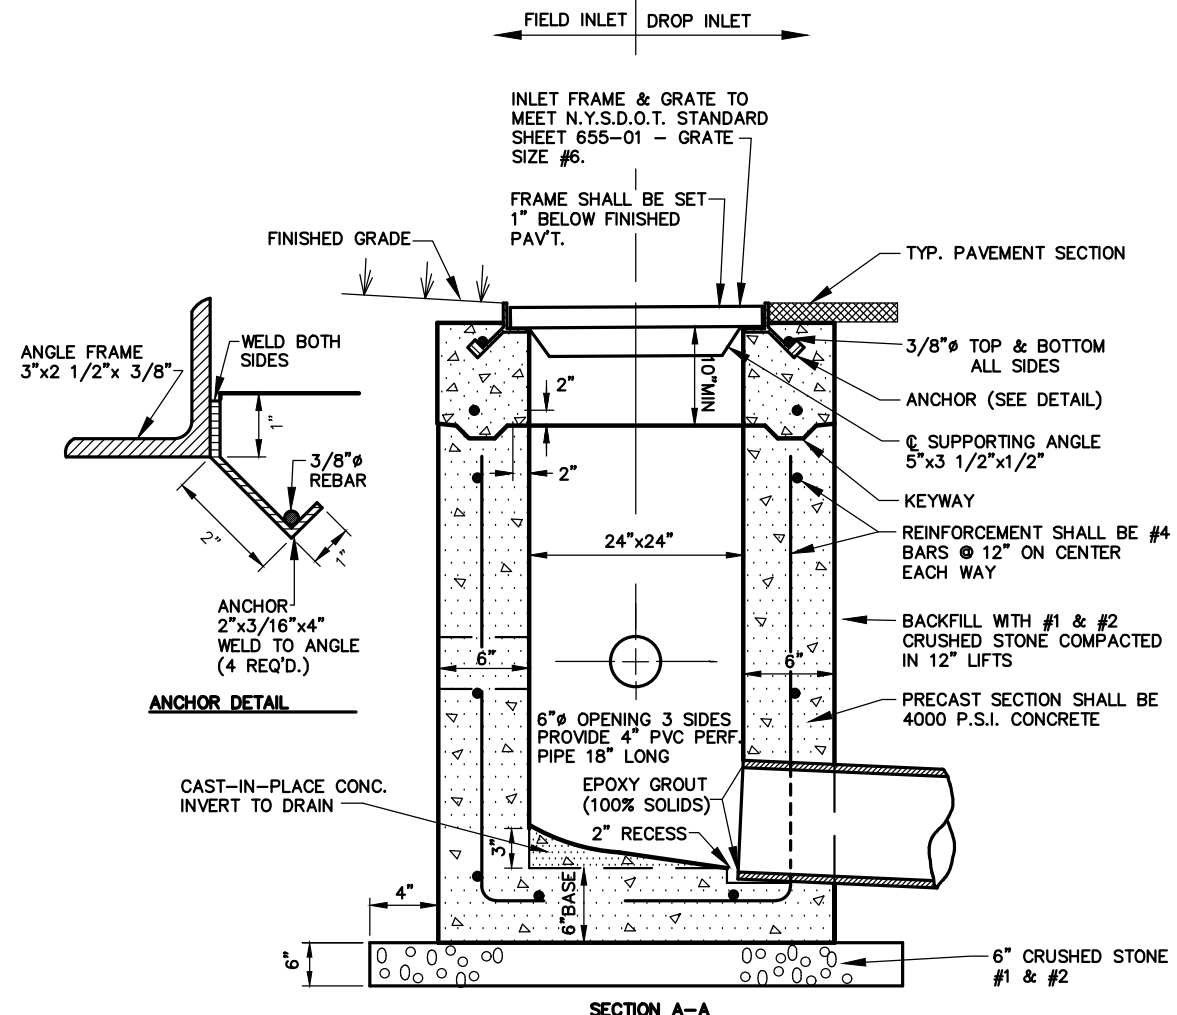

4 DROP/ FIELD INLET

APPROVED BY: _____
PLANNING BOARD CHAIRPERSON
DATE: _____

MARATHON ENGINEERING
ROCHESTER LOCATION
39 CASCADE DRIVE
ROCHESTER, NY 14614
585-458-7770
ITHACA LOCATION
840 HANSHAW RD, STE 12
ITHACA, NY 14850
607-241-2917
www.marathoneng.com

SITE PLANS for THE HESS RESIDENCE
4645 WEST LAKE ROAD
ONTARIO COUNTY
STATE OF NEW YORK
TOWN OF CANANDAIGUA

JOB NO: 1099-20
SCALE: AS SHOWN
DRAWN: LJB
DESIGNED: RPB
DATE: 06/10/2020

REVISIONS		
DATE	BY	REVISION

COPYRIGHT © 2020 MARATHON ENG.

STATE OF NEW YORK
ROBERT P. BRINGLEY
NO. 066924
LICENSED PROFESSIONAL ENGINEER


DRAWING TITLE:
GRADING & UTILITY PLAN

4 of 6
SHEET No: **C3.0**
JOB No: 1099-20
DRAWING No: _____

File: Z:\Engineering\Job Files\1099-20\Drawings\ Sheets\ C4.0.dwg, Plot Date: 6/9/2020, Plot Style: MARATHON STANDARD.CTB

EROSION CONTROL NOTES

- INSPECTION** - EROSION CONTROL (EC) MEASURES INSTALLED AND MAINTAINED BY THE SITE WORK CONTRACTOR ARE SUBJECT TO THE REVIEW AND APPROVAL OF THE: MUNICIPALITY, DESIGN ENGINEER, AND OWNER'S REPRESENTATIVE. IMMEDIATE ACTION BY THE CONTRACTOR SHALL BE TAKEN IF ADDITIONAL OR CORRECTIVE MEASURES ARE REQUIRED BY ANY ONE OF THESE CITED REVIEWERS. EROSION CONTROL MEASURES NOT SPECIFICALLY SHOWN ON CONTRACT DRAWINGS (I.E. STRAW BALES, COLLARS, FABRICS, ETC.) SHALL BE INSTALLED AS WARRANTED BY FIELD CONDITIONS, AND AS DIRECTED BY THE AFOREMENTIONED REVIEWERS.
- PRE-CONSTRUCTION** - THE APPROPRIATE EROSION CONTROL MEASURES AS DEFINED BY THE CONSTRUCTION DOCUMENTS SHALL BE INSTALLED PRIOR TO THE START OF ANY CONSTRUCTION ACTIVITIES.
- TOPSOIL** - UPON COMPLETION OF THE STOCKPILE STRIPPING OPERATION, STOCKPILES SHALL BE STABILIZED IN ACCORDANCE TO NYSDEC REGULATIONS.
- SLOPES** - UPON COMPLETION OF GRADING, SLOPES WITH A GRADIENT OF ONE FOOT VERTICAL TO THREE FEET HORIZONTAL (1 ON 3) OR GREATER SHALL BE: TOPSOILED, SEEDED, FERTILIZED AND MULCHED OR TREATED AS SPECIFIED ON CONTRACT DRAWINGS.
- DUST** - THE CONTRACTOR SHALL APPLY WATER AND/OR CALCIUM CHLORIDE, AS CONDITIONS WARRANT, TO CONTROL WIND BORN EROSION. THIS MEASURE APPLIES TO: HAUL ROADS, CUT AND FILL OPERATIONS, SUB-BASE AND ANY OTHER EXPOSED SURFACES.
- OPERATION & MAINTENANCE** - THROUGHOUT THE PERIOD OF CONSTRUCTION AND PRIOR TO ESTABLISHING FINAL GROUND COVER THE SITE CONTRACTOR IS RESPONSIBLE FOR THE OPERATION AND MAINTENANCE OF THE TEMPORARY EROSION CONTROL MEASURES. FOR EXAMPLE, THE SILTATION FACILITIES SHALL BE RE-EXCAVATED WHEN THE VOLUME (3600 CUBIC FEET/DISTURBED ACRE) IS REDUCED BY ONE-HALF OR MORE OF ITS SPECIFIED CAPACITY AND/OR THE MATERIAL IS WITHIN ONE FOOT OF THE DISCHARGE POINT.
- WORK STOPPAGE** - ALL DISTURBED AREAS NOT TO BE WORKED WITHIN 14 DAYS MUST BE SEEDED WITHIN 7 DAYS FROM THE LAST CONSTRUCTION ACTIVITY IN THAT AREA.
- TEMPORARY STABILIZATION** - TEMPORARY STABILIZATION SHALL REQUIRE 4 TONS OF STRAW/ACRE OF DISTURBANCE PLACED WITH TACKIFIER OR ROLLED WITH A TRACKED VEHICLE TO ENSURE NOT DISPLACED.
- WINTER STABILIZATION** - ALL WINTER STABILIZATION METHODS IDENTIFIED IN THE NYS "BLUE BOOK" SHALL BE FOLLOWED FOR ANY DISTURBANCE OR NON-STABILIZED AREAS FROM NOVEMBER 15TH - APRIL 1ST.
- SUBSOIL RESTORATION** - ALL AREAS TO BE RESTORED AS LAWN SHALL BE RESTORED PER CHAPTER 5 (5.1.6) OF THE NEW YORK STATE STORMWATER DESIGN MANUAL AND THE SOIL RESTORATION TABLE (TABLE 5.3 - SOIL RESTORATION REQUIREMENTS) SHOWN ON THE PLANS. THE PROJECT SOILS ARE HYDROLOGIC SOIL GROUP B AND SHALL BE RESTORED AS SPECIFIED.
- SEQUENCE** - THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES IN THE FOLLOWING SEQUENCE UNLESS AUTHORIZED OTHERWISE AT PRE-CONSTRUCTION MEETING:
 - INSTALL PERIMETER SEDIMENT CONTROLS, I.E. EROSION FENCING.
 - INSTALL STABILIZED CONSTRUCTION ENTRANCE.
 - PROTECT VEGETATION TO REMAIN.
 - CLEAR/GRUB AND CONSTRUCT DIVERSIONARY SWALES, AND SEDIMENT BASINS.
 - COMPLETE CLEARING AND GRUBBING OPERATION.
 - PLACE EROSION CONTROL MEASURES AT TOPSOIL STOCKPILES AND STRIP TOPSOIL.
 - CONSTRUCT SWALES AND SILTATION DEVICES AS EARTHWORK OPERATIONS PROGRESS.
 - MAINTAIN EROSION CONTROL MEASURES AND PLACE ADDITIONAL MEASURES AS EARTHWORK AND UNDERGROUND UTILITIES ARE CONSTRUCTED.
 - ROUGH GRADE RAIN GARDEN AREAS AS TEMPORARY SEDIMENT TRAPS.
 - RESTORE AREAS AS DEFINED BY CONTRACT DOCUMENTS.
 - AFTER SITE IS SUBSTANTIALLY RESTORED, INSTALL RAIN GARDEN AREAS.
 - REMOVE EROSION CONTROL MEASURES AS AREAS ARE REESTABLISHED WITH GROUND COVER.

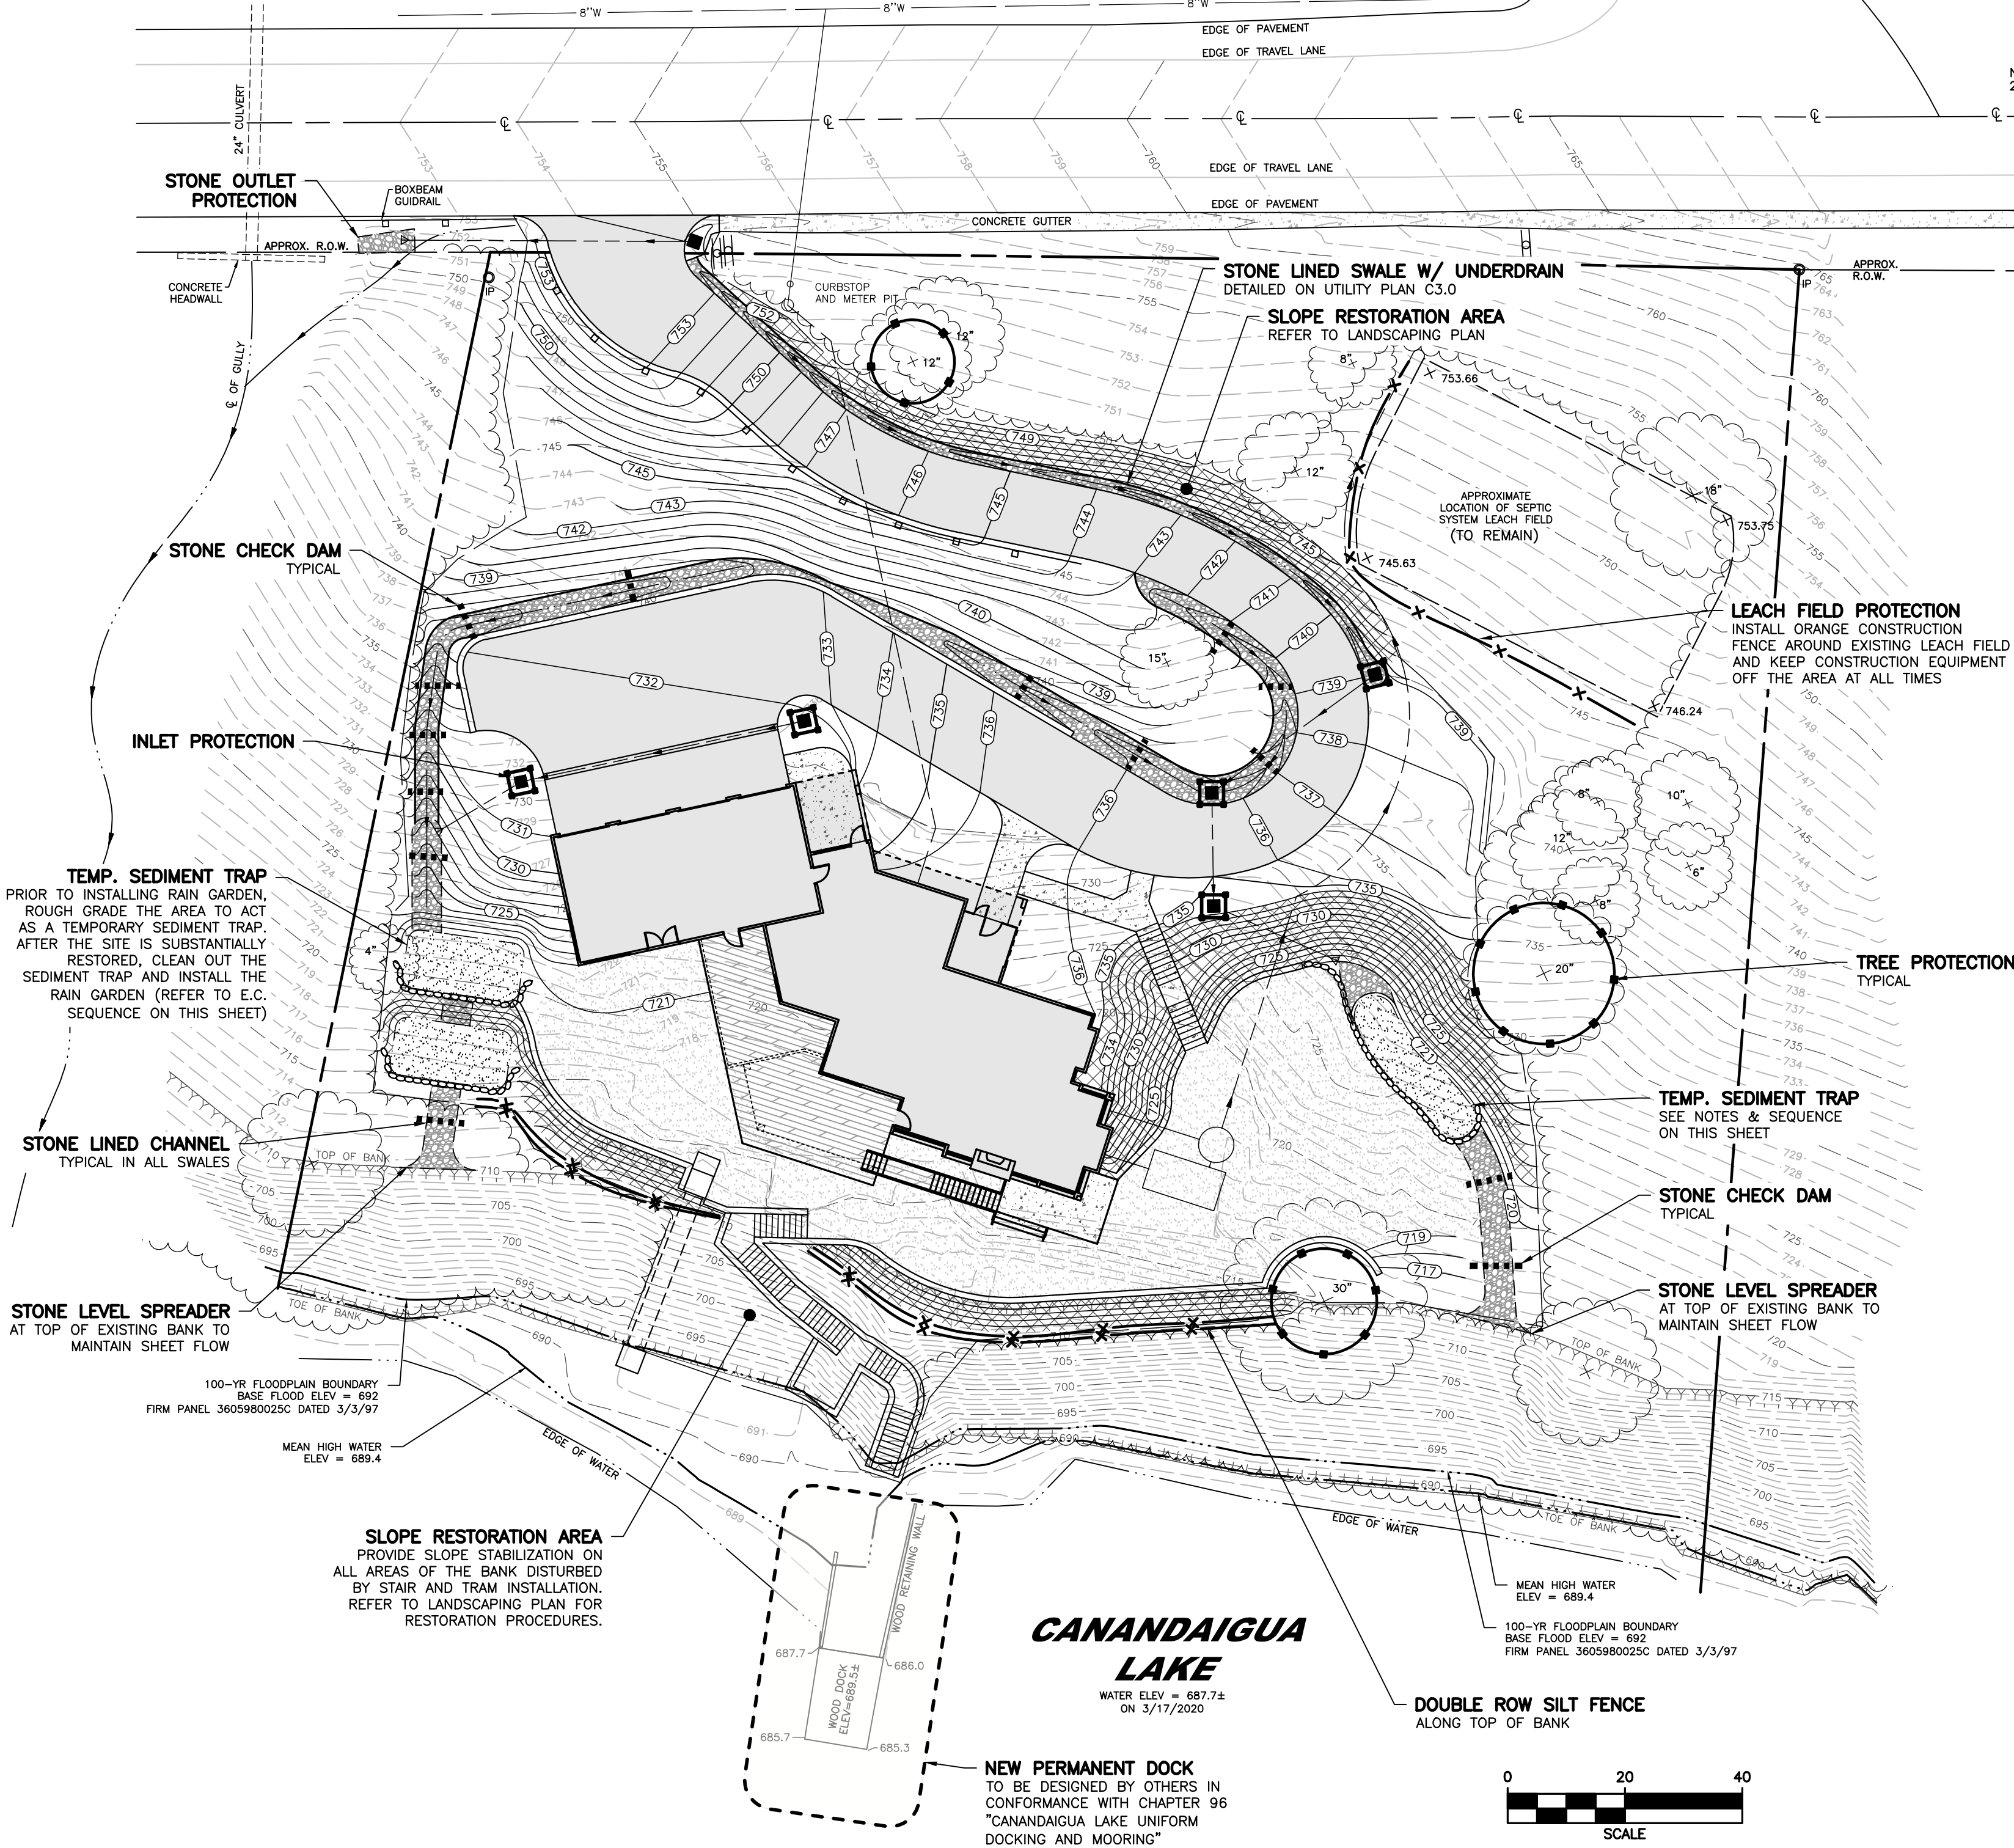


Slope Installation Guidelines:

These guidelines are recommendations only. Any questions with the installation should be confirmed with your local distributor.

- Dig a 6" by 6" trench both up-slope and down-slope of the area the matting is to be applied. Prepare the slope soil surface (raking, seeding and fertilizing).
- Begin by placing the blanket a minimum of 12" down-slope of the up-slope trench. Secure the blanket at the bottom of the trench with staples placed 12" apart. Backfill and compact the trench. Apply seed, and fold the blanket over soil, secure with a row of staples placed 12" apart across the width of the blanket. (See Diagram A)
- Roll the blanket vertically down the slope. Secure using the appropriate staple pattern below, specified by slope. (See Staple Patterns)
- Parallel blankets must be overlapped by a minimum of 4", and secured with a row of staples placed approximately 3'-0" apart. (See Diagram B)
- Additional vertical blankets can be joined using a minimum 4" overlapping, or single style (See Diagram C) in the direction of water flow. Connect the blankets by placing staples approximately 12" apart across the width of the blankets.
- For maximum performance a check slot should be placed at 25'-40' intervals. Place a row of staples 4" apart along the entire width of the slope. A second row should be placed 4" below in a staggered pattern. Then continue with general installation. (See Diagrams D)
- The end of blanket must be secured in a 6" x 6" trench with a row of staples placed at 12" intervals. (Diagram E)





Staple Patterns:

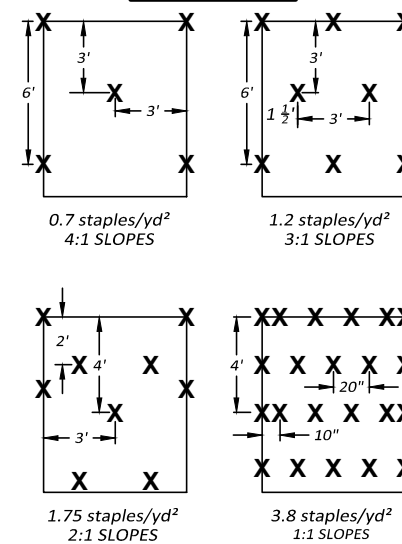

Specifications and Equivalency:


All product material and performance specifications are available from East Coast Erosion Blankets via the product specification sheet. Utilization of a 11 gauge staple, a minimum 6" long by 1" crown, is recommended. The tightly compressed blankets are wrapped and include a product label, code and installation guide.

- In addition to meeting all data available on the specification sheet, equivalent products shall meet the following requirements:
- The product must be listed with the NTPE database.
- The product must meet the Type 2-C specification requirements established by the Erosion Control Technology Council (ECTC).
- The product must meet the Federal Highway Administration's (FHWA) PP-03 Section 713.17 specification.

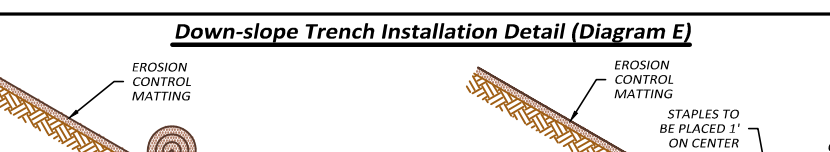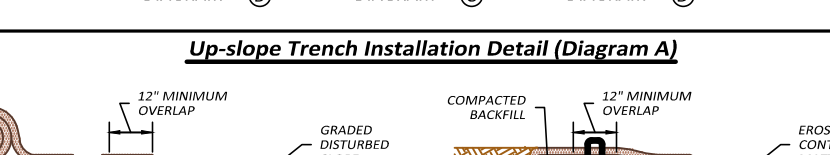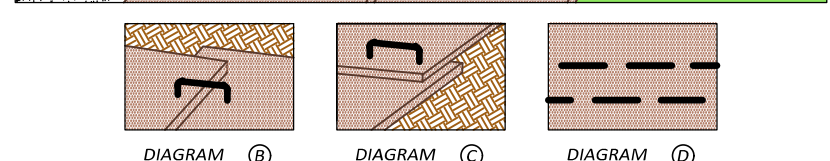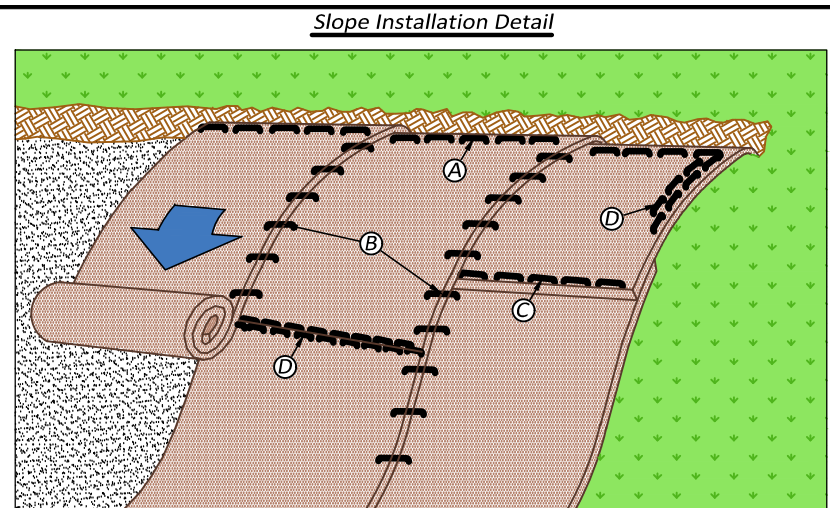

1 SLOPE STABILIZATION FABRIC

SCALE: N.T.S.

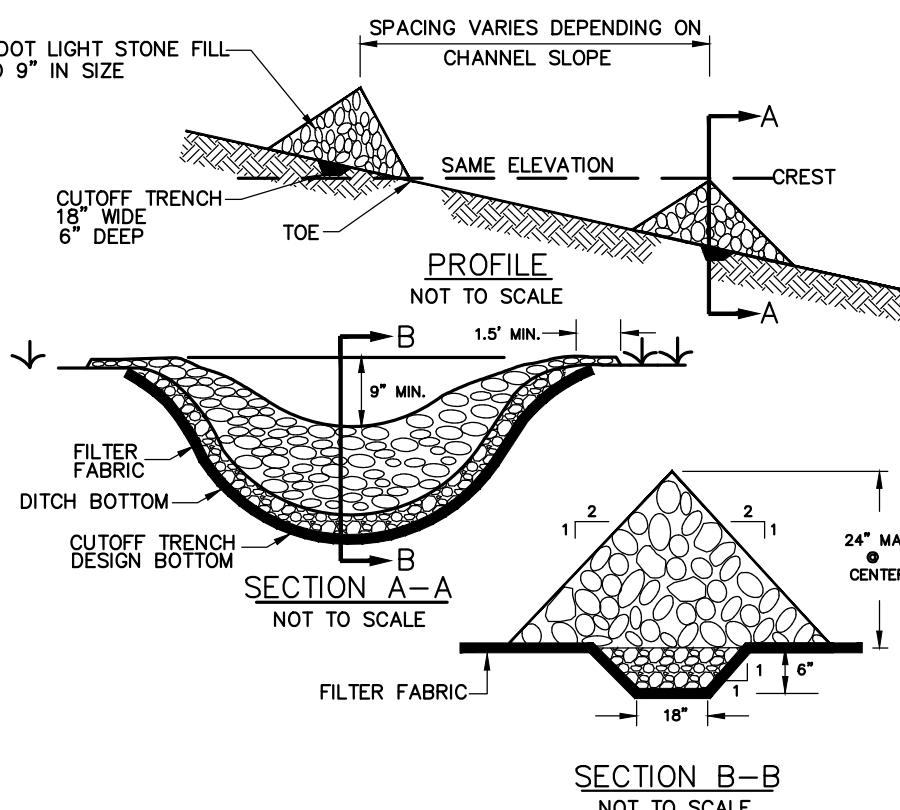


CONSTRUCTION SPECIFICATIONS

- STONE WILL BE PLACED ON A FILTER FABRIC FOUNDATION TO THE LINES, GRADES AND LOCATION SHOWN ON IN THE PLAN
- SET SPACING OF CHECK DAMS TO ASSUME THAT THE ELEVATIONS OF THE CREST OF THE DOWNSTREAM DAM IS AT THE SAME ELEVATION OF THE UPSTREAM DAM.
- EXTEND THE STONE A MINIMUM OF 1.5 FEET BEYOND THE DITCH BANKS TO PREVENT CUTTING AROUND THE DAM.
- PROTECT THE CHANNEL DOWNSTREAM OF THE LOWEST CHECK DAM FROM SCOUR AND EROSION WITH STONE OR LINER AS APPROPRIATE.
- ENSURE THAT CHANNEL APPURTENANCES SUCH AS CULVERT ENTRANCES BELOW CHECK DAMS ARE NOT SUBJECT TO DAMAGE OF BLOCKAGE FROM DISPLACED STONES.

2 STONE CHECK DAM

SCALE: N.T.S.

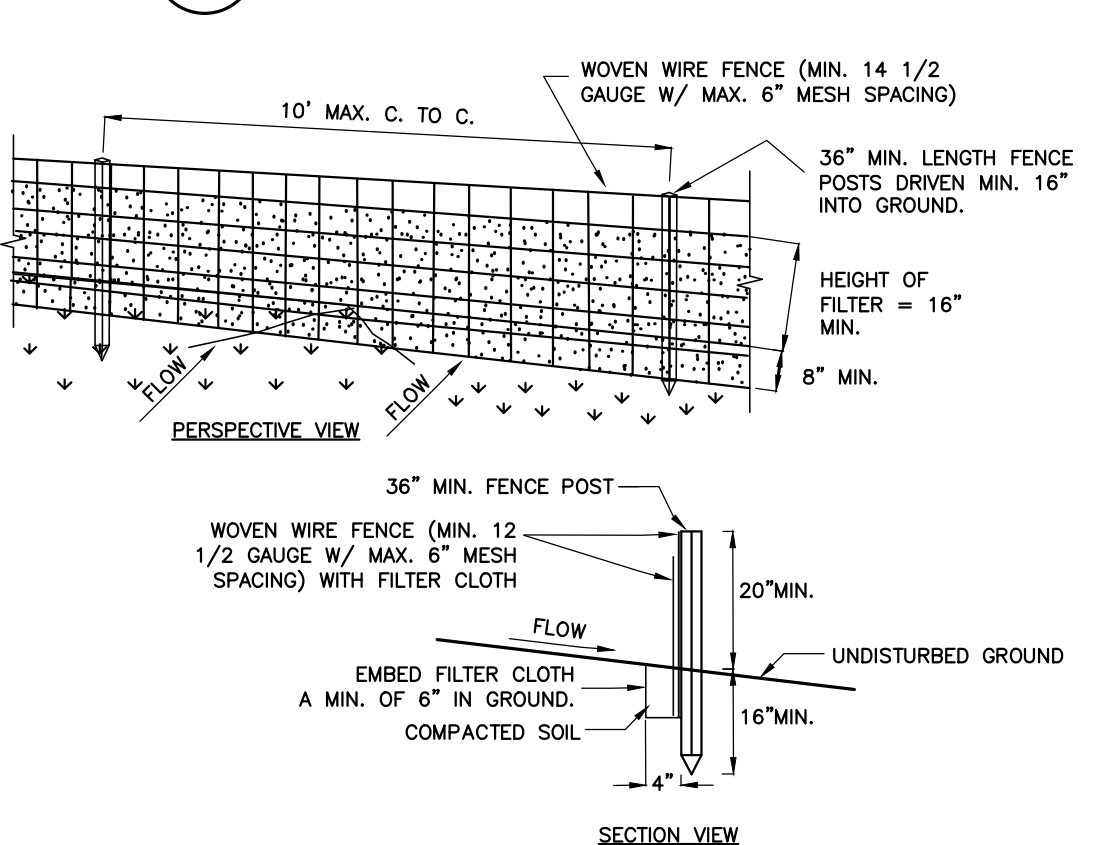

CONSTRUCTION SPECIFICATIONS


- WOVEN WIRE FENCE TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES. POSTS SHALL BE STEEL "I" OF "U" TYPE OF HARDWOOD.
- FILTER CLOTH TO BE FASTENED SECURELY TO WOVEN WIRE FENCE WITH TIES SPACED EVERY 24" AT TOP AND MID SECTION. FENCE SHALL BE WOVEN WIRE, 12 1/2 GAUGE, 6" MAXIMUM MESH OPENING.
- WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY SIX INCHES AND FOLDED. FILTER CLOTH SHALL BE EITHER FILTER X, MIRAFI 100X, STABUNKA T140N, OR APPROVED EQUIVALENT.
- PREFABRICATED UNITS SHALL BE GEOFAB, ENVROFENCE, OR APPROVED EQUIVALENT.
- MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.
- ENVRO-FENCE WITH INTEGRAL MESH IS ACCEPTABLE SUBSTITUTE.

5 SILT FENCE

SCALE: N.T.S.


3 LEVEL SPREADER

SCALE: N.T.S.

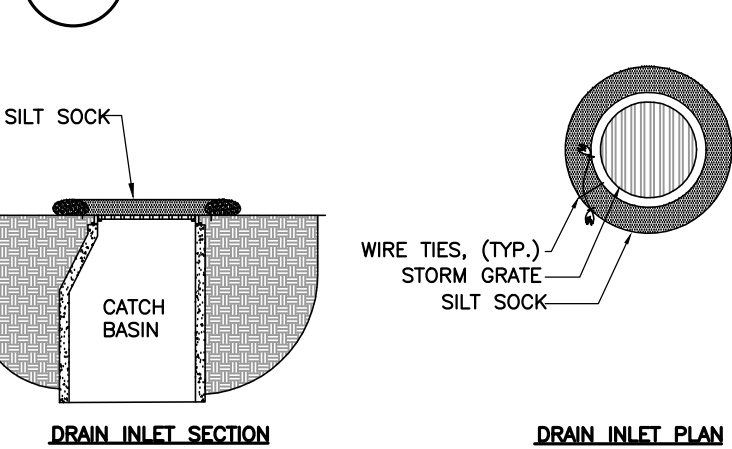

4 PAVED SURFACE INLET PROTECTION

SCALE: N.T.S.

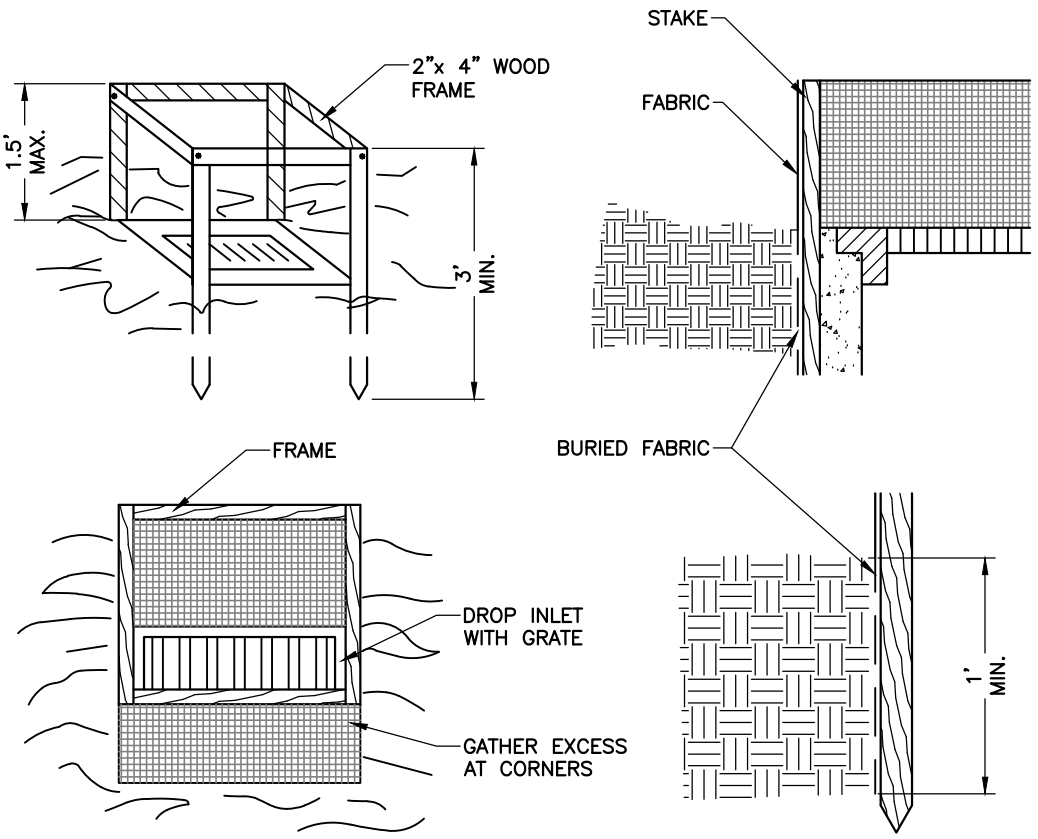

CONSTRUCTION SPECIFICATIONS

- FILTER FABRIC SHALL HAVE AN EOS OF 40-85. BURLAP MAY BE USED FOR SHORT TERM APPLICATIONS.
- CUT FABRIC FROM A CONTINUOUS ROLL TO ELIMINATE JOINTS. IF JOINTS ARE NEEDED THEY WILL BE OVERLAPPED TO THE NEXT STAKE.
- STAKE MATERIALS WILL BE STANDARD 2" x 4" WOOD OR EQUIVALENT METAL WITH A MINIMUM LENGTH OF 3 FEET.
- SPACE STAKES EVENLY AROUND INLET 3 FEET APART AND DRIVE A MINIMUM OF 18 INCHES DEEP. SPANS GREATER THAN 3 FEET MAY BE BRIDGED WITH THE USE OF WIRE MESH BEHIND THE FILTER FABRIC FOR SUPPORT.
- FABRIC SHALL BE EMBEDDED 1 FOOT MINIMUM BELOW GROUND AND BACKFILLED. IT SHALL BE SECURELY FASTENED TO THE STAKES AND FRAME.
- A 2" x 4" WOOD FRAME SHALL BE COMPLETED AROUND THE CREST OF THE FABRIC FOR OVER FLOW STABILITY.

6 DROP INLET PROTECTION

SCALE: N.T.S.

APPROVED BY:

PLANNING BOARD CHAIRPERSON

DATE:

JOB NO:	1099-20
SCALE:	AS SHOWN
DRAWN:	LJB
DESIGNED:	RPB
DATE:	06/10/2020

REVISIONS

DATE	BY	REVISION
------	----	----------

COPYRIGHT © 2020 MARATHON ENG.



DRAWING TITLE:
EROSION CONTROL AND STABILIZATION PLAN

5 of 6	C4.0
SHEET No:	
JOB No:	
1099-20	DRAWING No:

APPROVED BY:

PLANNING BOARD CHAIRPERSON

DATE: