WEHLEWEGMAN

RESIDENCE

4905 WEST LAKE ROAD CANANDAIGUA, NEW YORK

Client:

Jason Wehle & Nicole Wegman

Architect:

James Fahy Design Associates
Architecture & Engineering P.C.
2024 W. Henrietta Rd., Suite 3K
Rochester, NY 14623
tel. (585) 272-1650
fax (585) 272-1008
e-mail: info@jamesfahy.com
website: www.jamesfahy.com

Civil Engineer:

Venezia Land Surveyors & Civil Engineers 5120 Laura Lane Canandaigua, NY 14424 tel. (585) 396-3267

Contractor:

DVC, Incorporated
Custom Homebuilding
64 Stonington Drive
Pittsford, NY 14534
tel. (585) 353-3307
website: www.dvcincorp.com

Landscape Architect:

Bayer Landscape Architecture, PLLC 19 North Main St. Honeoye Falls, NY 14472 tel. (585) 582-2000 fax.(585) 582-2005 website: www.bayerla.com

Date:


February 8, 2017

JOB NO.

A16-079

DRAWING INDEX:

- TITLE SHEET
- T2 SPECIFICATION SHEET
- A1 NORTHWEST (ROAD SIDE) ELEVATION & SOUTHEAST (LAKE SIDE) ELEVATIONS
- A1.1 NORTHEAST & SOUTHWEST & NORTHWEST PORTE COCHERE ELEVATION
- A1.2 CARRIAGE GARAGE ELEVATIONS
- FOUNDATION PLAN HOUSE
- A2.1 FOUNDATION PLAN CARRIAGE GARAGE
- A3 LOWER LEVEL FLOOR PLAN
- A4 MAIN LEVEL FLOOR PLAN HOUSE
- A4.1 MAIN LEVEL FLOOR PLAN CARRIAGE GARAGE & GUEST SUITE
- A5 ROOF PLAN HOUSE
- A5.1 ROOF PLAN CARRIAGE GARAGE
- A6 CROSS SECTIONS A-D
- A6.1 CROSS SECTIONS E-J
- A6.2 CROSS SECTIONS K-R
- A7 DETAILS & TYPICAL WALL SECTION
- A7.1 DETAILS
- A7.2 DETAILS
- S1 MAIN FLOOR FRAMING PLAN
- S2 MAIN FLOOR CEILING FRAMING PLAN
- S2.1 CARRIAGE GARAGE CEILING FRAMING PLAN & GUEST SUITE FLOOR FRAMING PLAN
- S2.2 REFLECTED SOFFIT & EXTERIOR CEILING PLAN
- 3 ROOF FRAMING PLAN

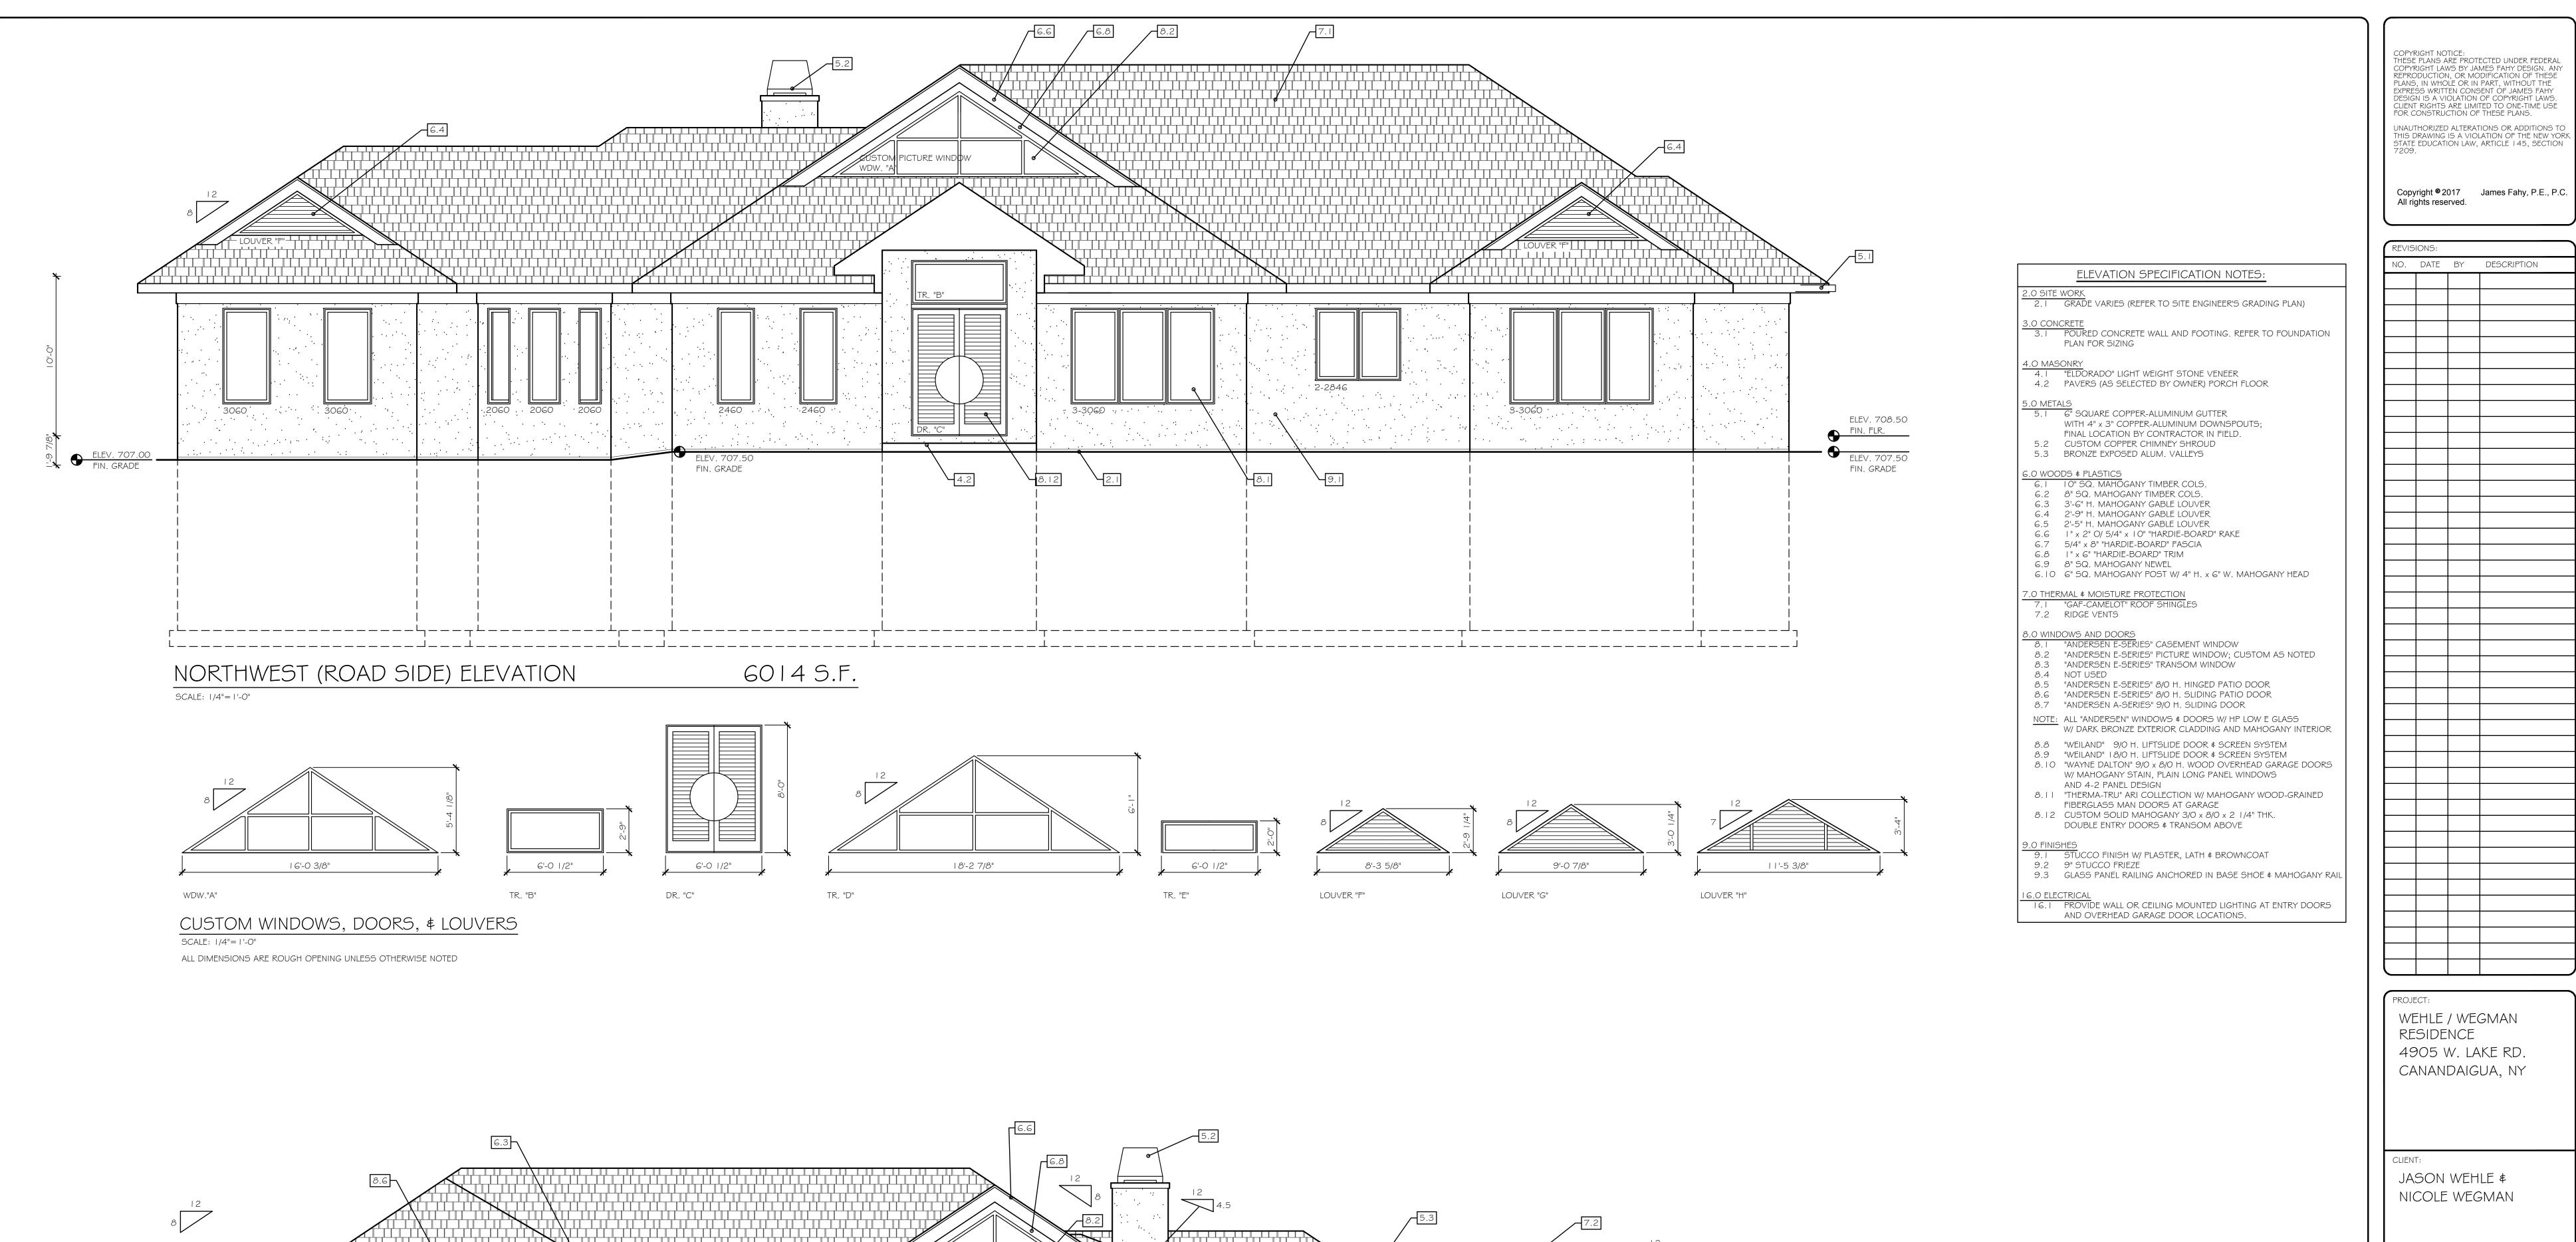



SOUTHEAST (LAKE SIDE) ELEVATION

SCALE: 1/4"=1'-0"

James Fahy Design
2024 W. Henrietta Rd. Suite 3K

James Fahy Design
2024 W. Henrietta Rd. Suite 3K
Rochester, New York 14623
585-272-1650 Fax 585-272-1008
e-mail: info@jamesfahy.com
website: www.jamesfahy.com

DRAWING TITLE:

ELEVATIONS

A16-079

DRAWN BY:

CHECKED BY:

NORTHWEST & SOUTHEAST

CONSTRUCTION DOCUMENTS

PROJECT NO.


DRAWING NO:

10-6014-3




HESE PLANS ARE PROTECTED UNDER FEDERAL EPRODUCTION, OR MODIFICATION OF THESE PLANS, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN CONSENT OF JAMES FAHY DESIGN IS A VIOLATION OF COPYRIGHT LAWS. CLIENT RIGHTS ARE LIMITED TO ONE-TIME USE FOR CONSTRUCTION OF THESE PLANS. UNAUTHORIZED ALTERATIONS OR ADDITIONS TO THIS DRAWING IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW, ARTICLE 145, SECTION

Copyright © 2017 James Fahy, P.E., P.C.

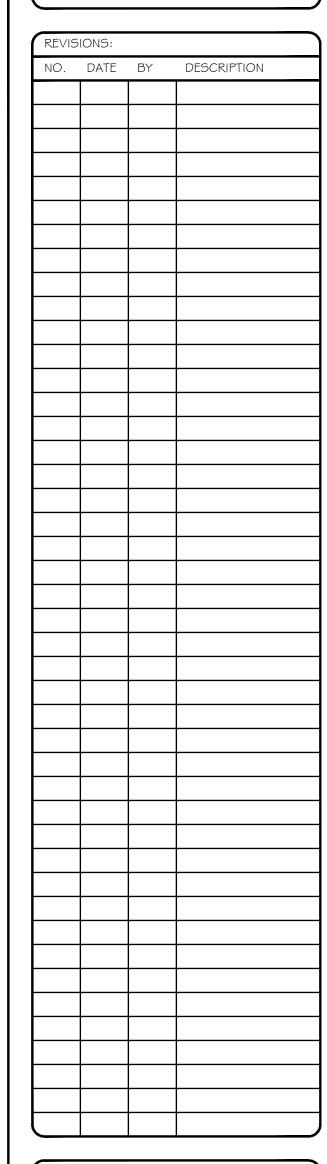


CONSTRUCTION DOCUMENTS

JOB NO. A I 6-079	PROJECT NO. 10-6014-3
DRAWN BY: CNS	DRAWING NO:
CHECKED BY:	\neg
DATE: 2-8-2017	7 / / / /





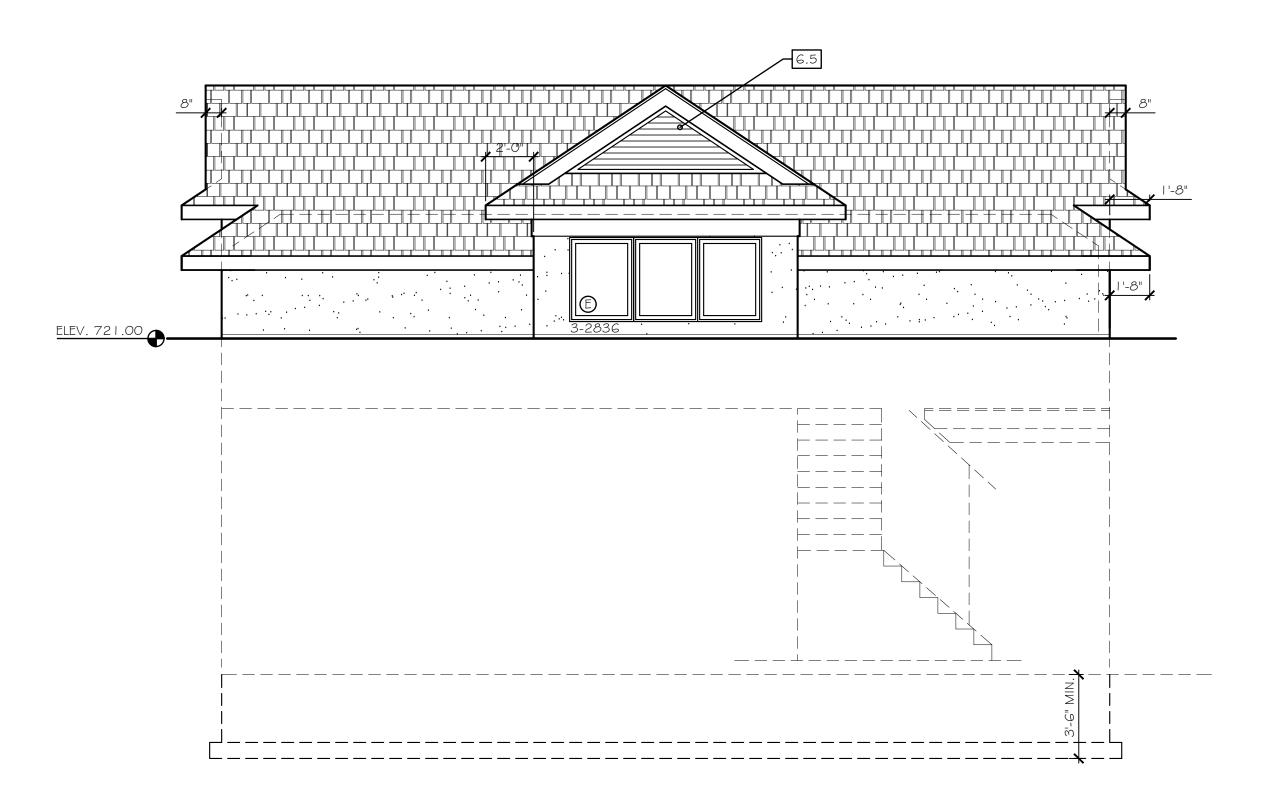

CARRIAGE GARAGE SOUTHEAST ELEVATION

SCALE: 1/4"=1'-0"

CARRIAGE GARAGE NORTHWEST ELEVATION

SCALE: 1/4"=1'-0"

ELEVATION SPECIFICATION NOTES: 2.0 SITE WORK

2.1 GRADE VARIES (REFER TO SITE ENGINEER'S GRADING PLAN) 3.1 POURED CONCRETE WALL AND FOOTING. REFER TO FOUNDATION PLAN FOR SIZING 4.1 "ELDORADO" LIGHT WEIGHT STONE VENEER 4.2 PAVERS (AS SELECTED BY OWNER) PORCH FLOOR 5.0 METALS 5.1 6" SQUARE COPPER-ALUMINUM GUTTER WITH 4" x 3" COPPER-ALUMINUM DOWNSPOUTS; FINAL LOCATION BY CONTRACTOR IN FIELD. 5.2 CUSTOM COPPER CHIMNEY SHROUD 5.3 BRONZE EXPOSED ALUM. VALLEYS 6.0 WOODS & PLASTICS 6.1 10" SQ. MAHOGANY TIMBER COLS. 6.2 8" SQ. MAHOGANY TIMBER COLS. 6.3 3'-6" H. MAHOGANY GABLE LOUVER 6.4 2'-9" H. MAHOGANY GABLE LOUVER 6.5 2'-5" H. MAHOGANY GABLE LOUVER 6.6 I" x 2" 0/ 5/4" x I 0" "HARDIE-BOARD" RAKE 6.7 5/4" x 8" "HARDIE-BOARD" FASCIA 6.8 I " x 6" "HARDIE-BOARD" TRIM 6.9 8" SQ. MAHOGANY NEWEL 6.10 6" SQ. MAHOGANY POST W/ 4" H. x 6" W. MAHOGANY HEAD 7.0 THERMAL & MOISTURE PROTECTION
7.1 "GAF-CAMELOT" ROOF SHINGLES 7.2 RIDGE VENTS 3.0 WINDOWS AND DOORS

8.1 "ANDERSEN E-SERIES" CASEMENT WINDOW 8.2 "ANDERSEN E-SERIES" PICTURE WINDOW; CUSTOM AS NOTED 8.3 "ANDERSEN E-SERIES" TRANSOM WINDOW 8.4 NOT USED 8.5 "ANDERSEN E-SERIES" 8/0 H. HINGED PATIO DOOR 8.6 "ANDERSEN E-SERIES" 8/0 H. SLIDING PATIO DOOR 8.7 "ANDERSEN A-SERIES" 9/0 H. SLIDING DOOR NOTE: ALL "ANDERSEN" WINDOWS & DOORS W/ HP LOW E GLASS
W/ DARK BRONZE EXTERIOR CLADDING AND MAHOGANY INTERIOR 8.8 "WEILAND" 9/0 H. LIFTSLIDE DOOR & SCREEN SYSTEM 8.9 "WEILAND" 18/0 H. LIFTSLIDE DOOR & SCREEN SYSTEM 8.10 "WAYNE DALTON" 9/0 x 8/0 H. WOOD OVERHEAD GARAGE DOORS W/ MAHOGANY STAIN, PLAIN LONG PANEL WINDOWS AND 4-2 PANEL DESIGN 8.11 "THERMA-TRU" ARI COLLECTION W/ MAHOGANY WOOD-GRAINED FIBERGLASS MAN DOORS AT GARAGE 8.12 CUSTOM SOLID MAHOGANY 3/0 x 8/0 x 2 1/4" THK. DOUBLE ENTRY DOORS & TRANSOM ABOVE 9.1 STUCCO FINISH W/ PLASTER, LATH \$ BROWNCOAT 9.2 9" STUCCO FRIEZE 9.3 GLASS PANEL RAILING ANCHORED IN BASE SHOE & MAHOGANY RAIL I G. I PROVIDE WALL OR CEILING MOUNTED LIGHTING AT ENTRY DOORS

AND OVERHEAD GARAGE DOOR LOCATIONS.



THESE PLANS ARE PROTECTED UNDER FEDERAL COPYRIGHT LAWS BY JAMES FAHY DESIGN. ANY REPRODUCTION, OR MODIFICATION OF THESE PLANS, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN CONSENT OF JAMES FAHY DESIGN IS A VIOLATION OF COPYRIGHT LAWS. CLIENT RIGHTS ARE LIMITED TO ONE-TIME USE FOR CONSTRUCTION OF THESE PLANS.

UNAUTHORIZED ALTERATIONS OR ADDITIONS TO THIS DRAWING IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW, ARTICLE 145, SECTION 7209.

Copyright © 2017 James Fahy, P.E., P.C. All rights reserved.

I	

PROJECT:

WEHLE / WEGMAN

RESIDENCE

4905 W. LAKE RD.

CANANDAIGUA, NY

JASON WEHLE \$
NICOLE WEGMAN


DRAWING TITLE:

CARRIAGE GARAGE \$

PORTE COCHERE ELEVATIONS

PHASE:
CONSTRUCTION DOCUMENTS

JOB NO. A I 6-079	PROJECT NO. 10-6014-3
DRAWN BY: CNS	DRAWING NO:
CHECKED BY:] A12
DATE: 2-8-2017	



585-272-1650 Fax 585-272-1008 e-mail: info@jamesfahy.com website: www.jamesfahy.com