



CONCRETE TRUCK WASH AREA NOT TO SCALE

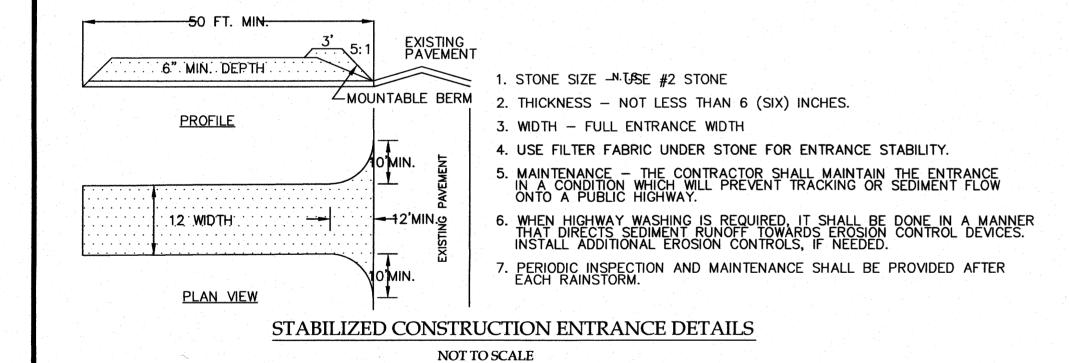

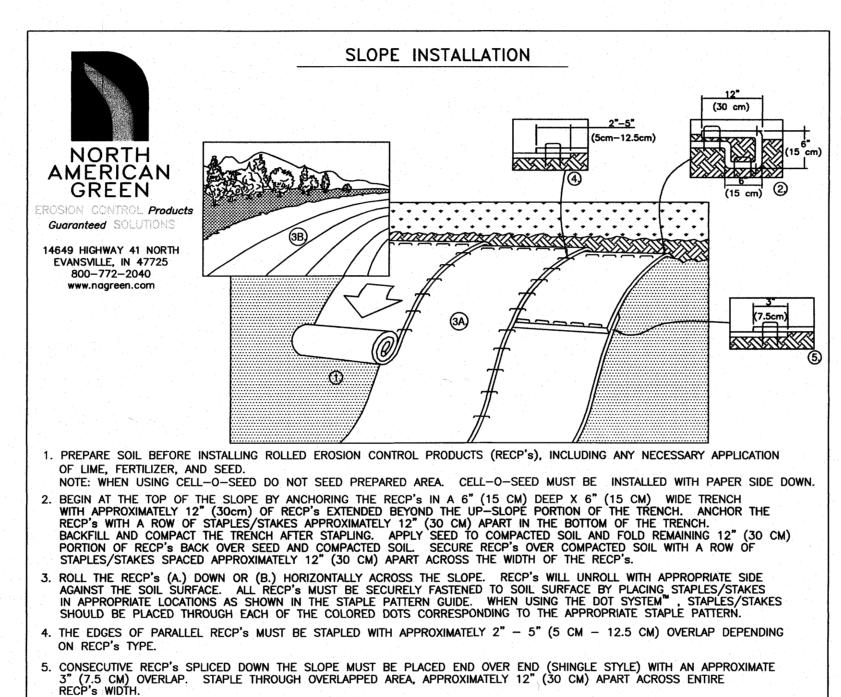

\*IN LOOSE SOIL CONDITIONS, THE USE OF STAPLE OR STAKE LENGTHS GREATER THAN 6" (15 CM) MAY BE NECESSARY TO

PROPERLY SECURE THE RECP's.

Revisions

## TOWN OF CANANDAIGUA STANDARD NOTES

1. ALL IMPROVEMENTS SHALL BE IN ACCORDANCE WITH THE MOST RECENT STANDARDS AND SPECIFICATIONS OF THE TOWN OF CANANDAIGUA AND THE APPROPRIATE WATER/ SEWER AGENCIES, UNLESS OTHERWISE NOTED.

2.SEQUENCE - THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES IN THE FOLLOWING

SEQUENCE UNLESS AUTHORIZED OTHERWISE AT THE PRE- CONSTRUCTION MEETING:

INSTALL PERIMETER SEDIMENT CONTROLS, (I.E. EROSION FENCING).

 INSTALL STABILIZED CONSTRUCTION ENTRANCE. PROTECT VEGETATION TO REMAIN.

• CLEAR GRUB AND CONSTRUCT DIVERSIONARY SWALES AND SEDIMENT BASINS.

• COMPLETE CLEARING AND GRUBBING OPERATION. • PLACE EROSION CONTROL MEASURES AROUND TOPSOIL STOCKPILES AND STRIP TOPSOIL LOCATIONS. CONSTRUCT SWALES AND SILTATION DEVICES AS EARTHWORK OPERATIONS PROGRESS.

• MAINTAIN EROSION CONTROL MEASURES AND PLACE ADDITIONAL MEASURES AS EARTHWORK AND UNDERGROUND UTILITIES ARE CONSTRUCTED.

 RESTORE AREAS AS DEFINED BY CONTRACT DOCUMENTS. • REMOVE EROSION CONTROL MEASURES AS AREAS ARE REESTABLISHED WITH GROUND COVER. • IF SITE PREPARATIONS OCCUR BETWEEN SEPTEMBER 1 AND MARCH 31, ADDITIONAL EROSION CONTROLS MUST BE TAKEN INCLUDING REDUCING THE SIZE OF DISTURBANCE AREA AND PLACING HEAVY STRAW MULCH WHERE PRACTICAL.

3. PLANS SHOULD INCLUDE RE-SEEDING INSTRUCTIONS INCLUDING MATERIALS AND A TIMETABLE FOR VARIOUS SEEDING

• SEED ALL CUT AND FILL, TOPSOIL PILES AND PONDS WITHIN SEVEN (7) DAYS AFTER COMPLETION. • TEMPORARY SEEDING OF DISTURBED AREAS SHALL BE PROVIDED AS FOLLOWS:

THE SURFACE TWO INCHES OF SOIL SHOULD BE LOOSENED BY DISKING, RAKING, OR BACK-BLADING WITH A BULLDOZER. IMMEDIATELY FERTILIZE WITH 300 POUNDS PER ACRE (OR 7 POUNDS PER 1,000 SQUARE FEET) OF 10-10-10 FERTILIZER. IMMEDIATELY SEED WITH THE FOLLOWING MIX: LBS/1,000 SQ. ACRES

SPRING/SUMMER/EARLY FALL ANNUAL RYE GRASS

PERENNIAL RYEGRASS

LATE FALL/EARLY WINTER

CEREAL RYE

SEED SHOULD HAVE A GERMINATION RATE OF AT LEAST 85 PERCENT AND MINIMAL INERT MATERIAL.

DISTURBED AREAS SHALL BE STABILIZED USING PERMANENT LAWN SEEDING MIX UPON COMPLETION OF GRADING AND CONSTRUCTION:

LBS/ACRELBS/1,000 SQ. ACRE

BIRDSFOOT TREFOIL OR COMMON WHITE CLOVER 8 OR 8 0.20 OR 0.20 TALL FESCUE

2 OR 5 0.05 OR 0.10 REDTOP OR RYEGRASS (PERENNIAL)

SEEDING RATE: 6.0 POUNDS PER 1,000 SQUARE FEET MULCH: STRAW OR WOOD FIBER MULCH USED WITH HYRDO SEEDING METHOD AT TWO TONS PER ACRE WITH TRACKIFIER.

STARTING FERTILIZER: 5:10:10 AT 20 POUNDS PER 1,000 SQUARE FEET. • FOR FALL OR EARLY WINTER, SEED WITH CERTIFIED AROOSTOCK WINTER RYE (CEREAL RYE) AT 100 POUNDS PER ACRE. • PERMANENT STABILIZATION FOR STEEP SLOPES GREATER THAN 3:1 SHALL INCLUDE JUTE MESH

BLANKET AND CROWN VETCH SEED WITH PERENNIAL RYEGRASS.

4.THE CONTRACTOR SHALL LOCATE, MARK, SAFEGUARD AND PRESERVE ALL SURVEY CONTROL MONUMENTS AND RIGHT-OF-WAY MONUMENT IN THE AREAS OF CONSTRUCTION.

5.EXISTING UNDERGROUND UTILITIES SHOWN HEREIN WERE PLOTTED FROM FIELD LOCATIONS AND /OR UTILITY COMPANY RECORD PLANS. PRIOR TO ANY CONSTRUCTION, THE CONTRACTOR SHALL CALL THE DIG SAFELY NEW YORK (UFPO) HOTLINE AT 1-800-962-7962 FOR STAKEOUT OF EXISTING UTILITIES. THE CONTRACTOR SHALL DETERMINE EXACT LOCATION AND EVALUATION OF UNDERGROUND UTILITIES BEFORE COMMENCING CONSTRUCTION. CONTRACTOR SHALL MAKE EXPLORATION EXCAVATIONS TO LOCATE EXISTING UNDERGROUND FACILITIES SUFFICIENTLY AHEAD OF CONSTRUCTION TO PERMIT REVISIONS AS REQUIRED TO MEET THE EXISTING CONDITIONS.

6.DUST SHALL BE CONTROLLED DURING CONSTRUCTION BY THE CONTRACTOR TO MINIMIZE EFFECT ON THE ADJACENT PROPERTIES. THE CONTRACTOR SHALL IMPLEMENT DUST CONTROL MEASURES AS NEEDED AND/ OR DIRECTED BY THE TOWN OF CANANDAIGUA.

7. THE OWNER'S CONTRACTOR SHALL BE RESPONSIBLE FOR THE ESTABLISHMENT, MAINTENANCE, CLEANING, REPAIR AND REPLACEMENT OF EROSION CONTROL MEASURES DURING SITE CONSTRUCTION.

8.ROOF LEADERS SHALL BE CONNECTED TO STORM SEWERS.

CONFIRMS THE INSTALLATION OF PERIMETER SEDIMENT CONTROLS.

9.NO SITE PREPARATION SHALL COMMENCE UNTIL A VISUAL INSPECTION BY THE TOWN OF CANANDAIGUA

10. ANY ADDITIONAL EROSION OR SEDIMENT CONTROL DEEMED NECESSARY BY THE TOWN OR A REPRESENTATIVE THEREOF SHALL BE PROVIDED BY THE OWNER.

11. SEDIMENT CONTROL MEASURES ARE TO BE ESTABLISHED PRIOR TO COMMENCING EARTHWORK. SEDIMENT CONTROL MEASURES ARE TO BE MAINTAINED BY THE CONTRACTOR UNTIL UPSTREAM GROUND COVER HAS BEEN ESTABLISHED AND REMOVAL IS APPROVED BY THE TOWN OF CANANDAIGUA.

12. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING, REPLACING AND SUBSEQUENTLY REMOVING TEMPORARY EROSION & SEDIMENT CONTROL DEVICES.

13. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CLEANING ADJOINING PROPERTIES, ROADWAYS, DRAINAGE WAYS AND SINKS OF SILT ACCUMULATION AS NEEDED AND AS DETERMINED/ REQUESTED BY THE TOWN OF CANANDAIGUA.

14. ANY FINAL GRADE DEVIATIONS OF HOUSE PAD ELEVATIONS MORE THAN 12 INCHES SHALL BE APPROVED BY THE PLANNING BOARD.

## FINAL SITE PLAN APPROVAL

PLANNING BOARD CHAIRPERSON DATE TOWN HIGHWAY & WATER SUPERINTENDENT

TOWN ENGINEER

NO BUILDING PERMIT MAY BE ISSUED UNTIL FINAL SITE PLAN APPROVAL HAS BEEN GRANTED AND THE FINAL SITE PLAN SIGNED BY THE PLANNING BOARD CHAIRPERSON.

File# 15230 —

DATE

NYS Land Surveyo

Rocco A. Venezia, P.L.S. License # 049761

Site Plan Prepared For: **Property Owner** Corey Westbrook 4118 Onnalinda Drive

Drawing Title:

Onnalinda Drive Town of Canandaigua County of Ontario

Corey Westbrook

Showing Land

T.m. # 113.17-1-31.0

Sheet 3 of 3

**W**VENEZIA LAND SURVEYORS AND CIVIL ENGINEERS

5120 Laura Lane —

FOR PERMITTING ONLY

Canandaigua New York, 14424

Iron pin or pipe found A P.K. nail set X Iron pin set ○ Concrete Monument Drill hole Benchmark - Utility pole Utility lines R.O.W. line Property lines

Date Description

Canandaigua, NY 14424

www.veneziasurvey.com

State of New York - (585)396-3267 ----- Fax. No. (585) 396-0131 -----

**EROSION CONTROL DETAILS** 

AS NOTED 3/10/16 E-mail rocco@veneziasurvey.com